SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 Gen9
(2.50 GHz, Intel Xeon E7-8890 v3)

SPECint®2006 = 62.6

SPECint_base2006 = 60.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2015
Hardware Availability: May-2015
Software Availability: Oct-2014

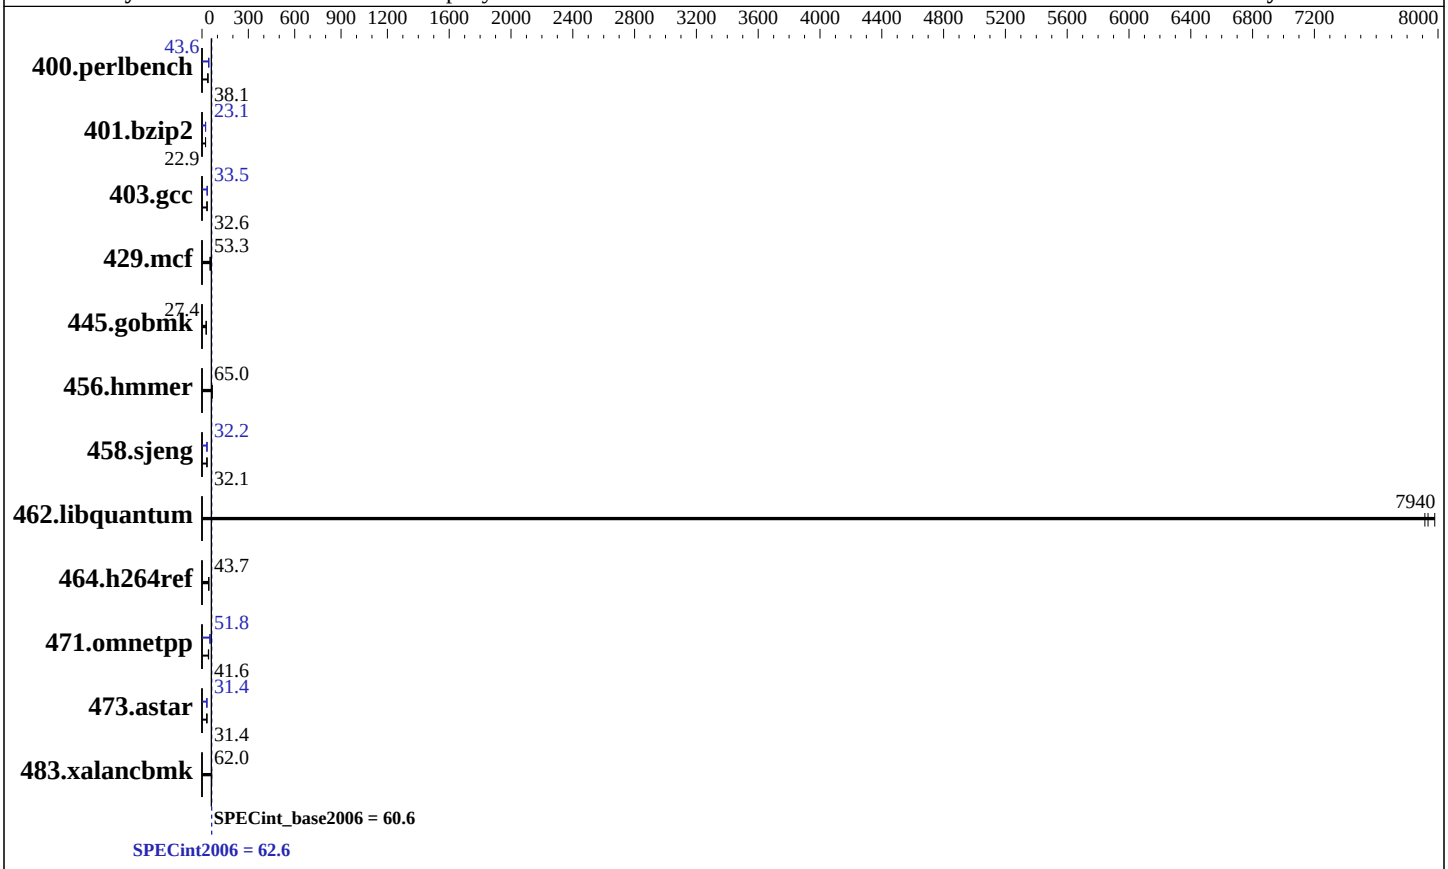

Hardware

CPU Name:	Intel Xeon E7-8890 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	36 cores, 2 chips, 18 cores/chip
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	1 x 400 GB SAS SSD, RAID 0
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) Kernel 3.12.28-4-default
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 Gen9
(2.50 GHz, Intel Xeon E7-8890 v3)

SPECint2006 = 62.6

SPECint_base2006 = 60.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2015
Hardware Availability: May-2015
Software Availability: Oct-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	256	38.2	**257**	**38.1**	257	38.0	225	43.5	224	43.6	**224**	**43.6**
401.bzip2	**421**	**22.9**	420	23.0	423	22.8	418	23.1	**418**	**23.1**	418	23.1
403.gcc	**247**	**32.6**	248	32.5	247	32.6	**240**	**33.5**	241	33.4	237	34.0
429.mcf	**171**	**53.3**	172	52.9	171	53.4	**171**	**53.3**	172	52.9	171	53.4
445.gobmk	**383**	**27.4**	383	27.4	384	27.3	**383**	**27.4**	383	27.4	384	27.3
456.hmmer	144	65.0	**143**	**65.0**	143	65.1	144	65.0	**143**	**65.0**	143	65.1
458.sjeng	**377**	**32.1**	377	32.1	378	32.0	376	32.2	**376**	**32.2**	376	32.2
462.libquantum	2.60	7980	2.62	7920	**2.61**	**7940**	2.60	7980	2.62	7920	**2.61**	**7940**
464.h264ref	**507**	**43.7**	506	43.7	508	43.5	**507**	**43.7**	506	43.7	508	43.5
471.omnetpp	145	43.1	**150**	**41.6**	150	41.6	119	52.7	121	51.7	**121**	**51.8**
473.astar	**224**	**31.4**	220	31.9	226	31.1	221	31.7	**224**	**31.4**	225	31.3
483.xalancbmk	**111**	**62.0**	111	62.2	111	61.9	**111**	**62.0**	111	62.2	111	61.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS Configuration
  Power Profile set to Custom
  Power Regulator set to Static High Performance Mode
  Minimum Processor Idle Power Core C-State set to C6 State
  Minimum Processor Idle Power Package C-State set to No Package State
  Energy/Performance Bias set to Maximum Performance
  Collaborative Power Control set to Enabled
  Thermal Configuration set to Maximum Cooling
  Processor Power and Utilization Monitoring set to Disabled
  Memory Refresh Rate set to 1x Refresh
  Intel Hyperthreading Options set to Disabled
Sysinfo program /cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-t8cw Thu Apr 30 20:41:26 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
          2 "physical id"s (chips)
          36 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 18
          siblings  : 18
          physical 0: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
          physical 1: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
       cache size : 46080 KB

    From /proc/meminfo
       MemTotal:       264557160 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       SuSE-release:
          SUSE Linux Enterprise Server 12 (x86_64)
          VERSION = 12
          PATCHLEVEL = 0
          # This file is deprecated and will be removed in a future service pack or
          release.
          # Please check /etc/os-release for details about this release.
       os-release:
          NAME="SLES"
          VERSION="12"
          VERSION_ID="12"
          PRETTY_NAME="SUSE Linux Enterprise Server 12"
          ID="sles"
          ANSI_COLOR="0;32"
          CPE_NAME="cpe:/o:suse:sles:12"

    uname -a:
       Linux linux-t8cw 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
       (9879bd4) x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Apr 30 16:55

    SPEC is set to: /cpu2006
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda3      xfs   371G  6.6G  364G   2% /
    Additional information from dmidecode:

       Warning: Use caution when you interpret this section. The 'dmidecode' program
       reads system data which is "intended to allow hardware to be accurately
       determined", but the intent may not be met, as there are frequent changes to
       hardware, firmware, and the "DMTF SMBIOS" standard.
```

Continued on next page

Platform Notes (Continued)

```
    BIOS HP U17 03/13/2015
    Memory:
     80x UNKNOWN NOT AVAILABLE
     16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1600 MHz

  (End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 256 GB and the dmidecode description should have one line reading as:
     16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1600 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
OMP_NUM_THREADS = "36"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

```
    400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
      401.bzip2: -DSPEC_CPU_LP64
        403.gcc: -DSPEC_CPU_LP64
        429.mcf: -DSPEC_CPU_LP64
      445.gobmk: -DSPEC_CPU_LP64
      456.hmmer: -DSPEC_CPU_LP64
      458.sjeng: -DSPEC_CPU_LP64
  462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
    464.h264ref: -DSPEC_CPU_LP64
    471.omnetpp: -DSPEC_CPU_LP64
      473.astar: -DSPEC_CPU_LP64
  483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32`
`-Wl,-z,muldefs -L/sh -lsmartheap64`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks (except as noted below):
`icpc -m64`

471.omnetpp: `icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 19 18:17:02 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 May 2015.