SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f (Intel Xeon E5-2640 v3)

SPECint®_rate2006 = 702

SPECint_rate_base2006 = 666

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Dec-2014
Hardware Availability: Apr-2015
Software Availability: Jul-2014

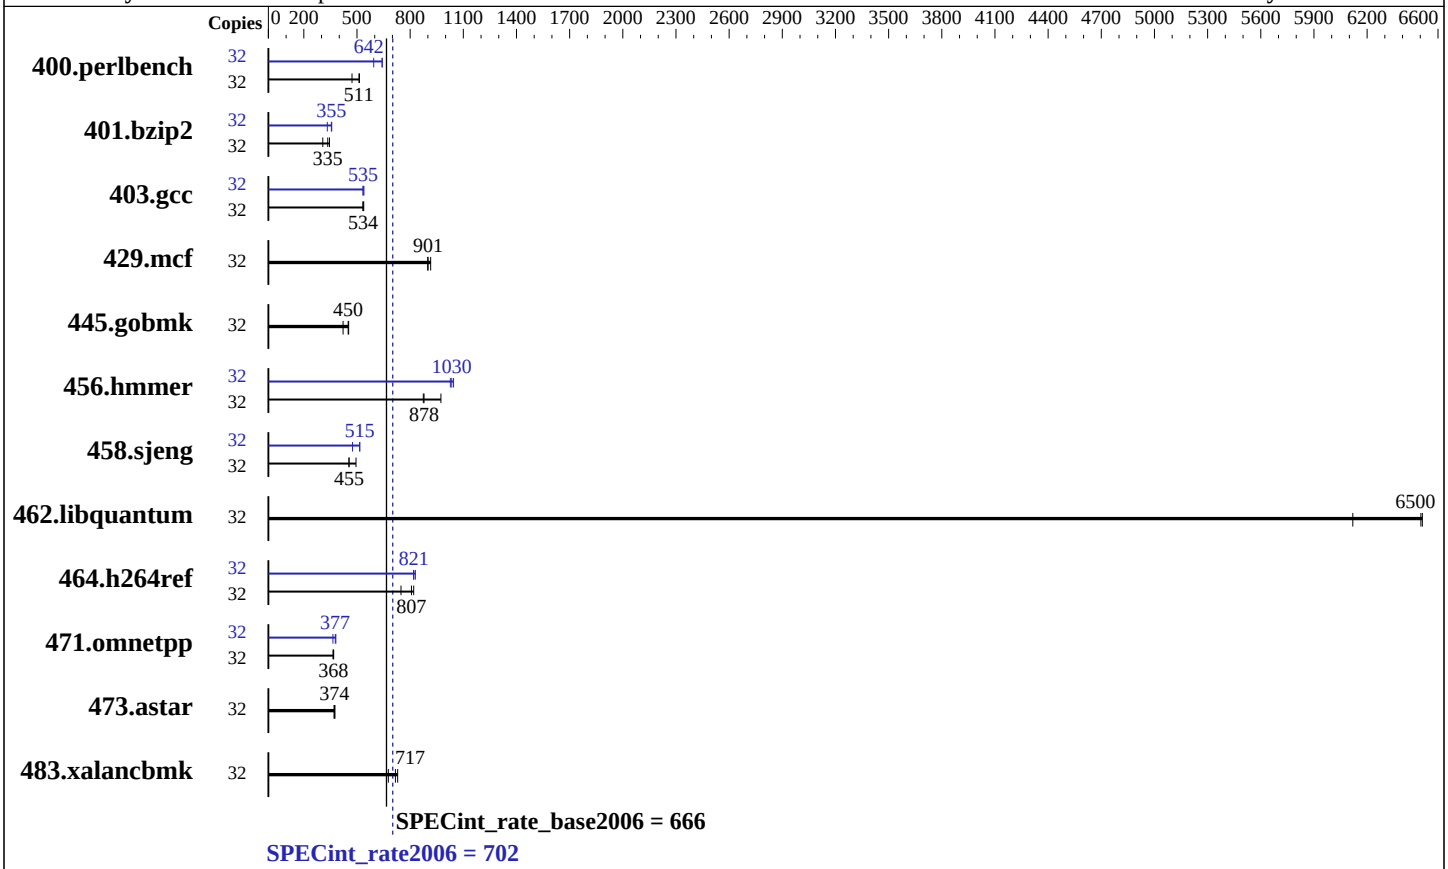

Hardware

CPU Name:	Intel Xeon E5-2640 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB (6 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem:	1 x 300 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) Kernel 2.6.32-431.20.3.el6.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f (Intel Xeon E5-2640 v3)

SPECint_rate2006 = 702

SPECint_rate_base2006 = 666

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Dec-2014
Hardware Availability: Apr-2015
Software Availability: Jul-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	**612**	**511**	663	472	608	514	32	526	594	**487**	**642**	487	643
401.bzip2	32	**922**	**335**	1006	307	896	345	32	929	333	864	358	**869**	**355**
403.gcc	32	**482**	**534**	479	538	482	534	32	483	534	**481**	**535**	478	539
429.mcf	32	**324**	**901**	325	899	319	916	32	**324**	**901**	325	899	319	916
445.gobmk	32	**746**	**450**	796	422	741	453	32	**746**	**450**	796	422	741	453
456.hmmer	32	**340**	**878**	307	974	342	874	32	286	1040	**289**	**1030**	291	1030
458.sjeng	32	852	455	783	495	**850**	**455**	32	751	516	**751**	**515**	815	475
462.libquantum	32	**102**	**6500**	108	6120	102	6510	32	**102**	**6500**	108	6120	102	6510
464.h264ref	32	864	820	**877**	**807**	946	748	32	865	819	854	830	**862**	**821**
471.omnetpp	32	543	368	**544**	**368**	549	365	32	**530**	**377**	549	364	525	381
473.astar	32	607	370	**601**	**374**	598	375	32	607	370	**601**	**374**	598	375
483.xalancbmk	32	326	677	**308**	**717**	303	730	32	326	677	**308**	**717**	303	730

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
 Processor C6 Report: Enabled
 Energy Performance: Performance
 Patrol Scrub: Disabled
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:
```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs

Continued on next page

Peak Optimization Flags (Continued)

471.omnetpp (continued):
`-L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120f-RevB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120f-RevB.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 2 13:46:21 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 June 2015.