SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML350 Gen9
(2.40 GHz, Intel Xeon E5-2630 v3)

SPECfp®2006 = 106

SPECfp_base2006 = 101

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

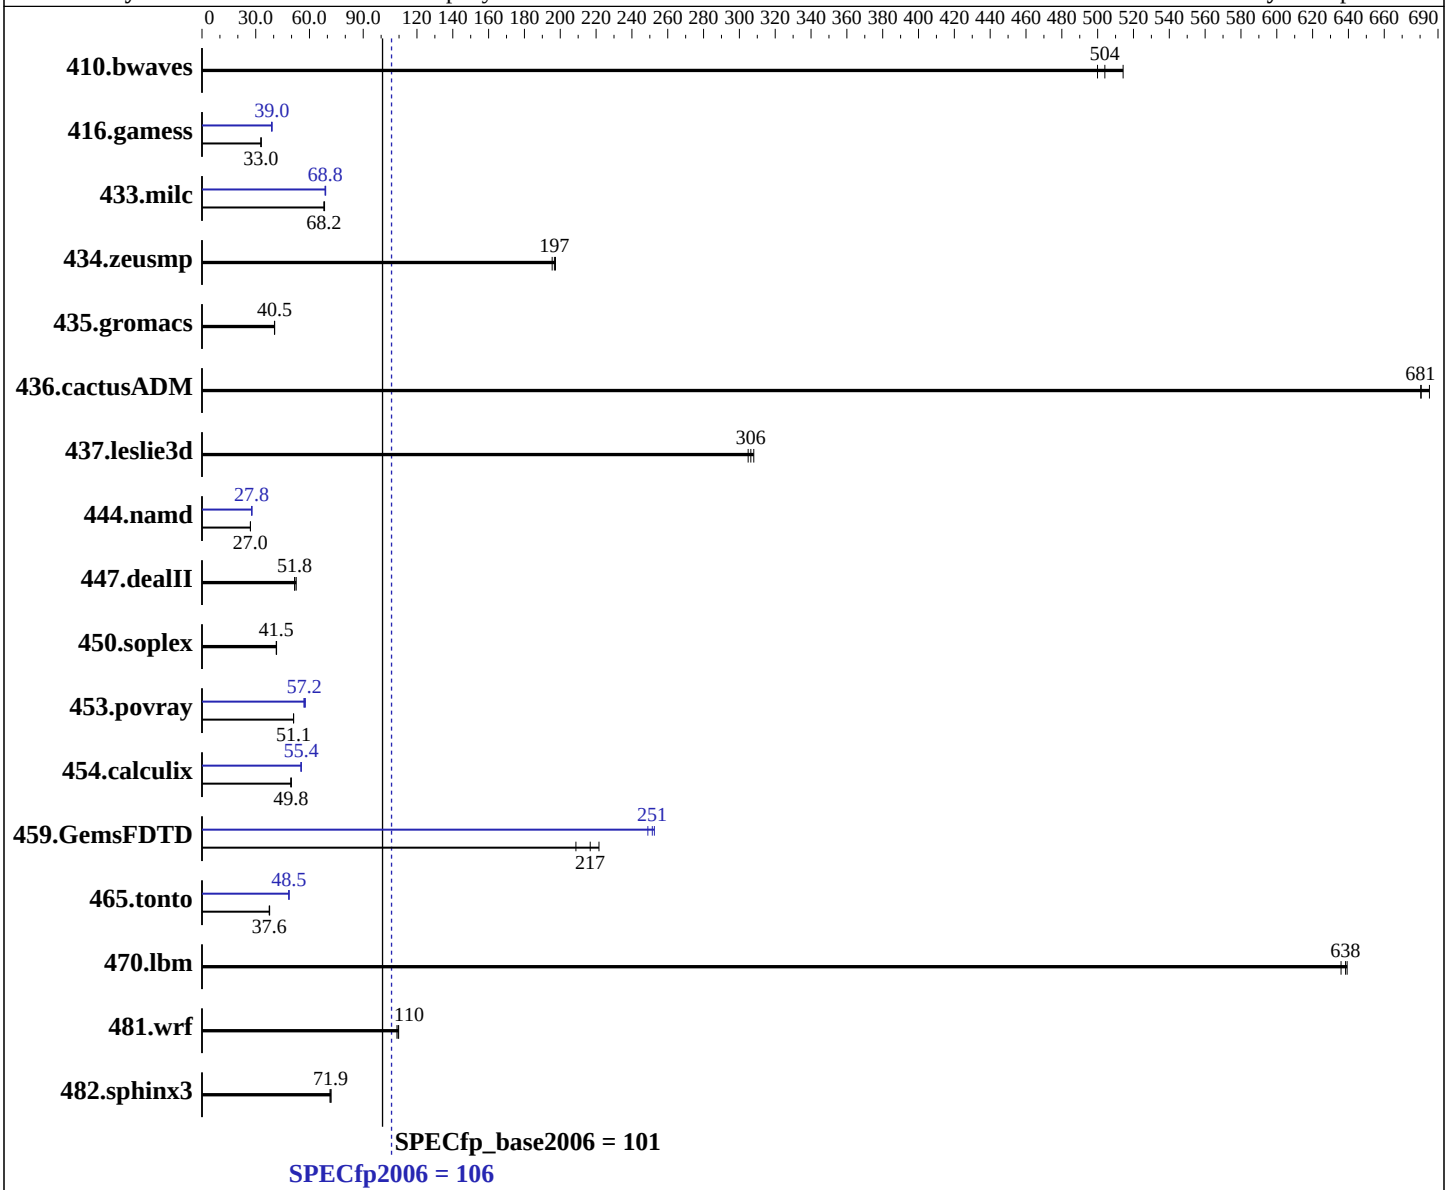

Hardware

CPU Name:	Intel Xeon E5-2630 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) Kernel 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML350 Gen9
(2.40 GHz, Intel Xeon E5-2630 v3)

SPECfp2006 = 106

SPECfp_base2006 = 101

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	27.2	500	26.4	514	**27.0**	**504**	27.2	500	26.4	514	**27.0**	**504**
416.gamess	593	33.0	595	32.9	**593**	**33.0**	**502**	**39.0**	504	38.8	501	39.1
433.milc	**135**	**68.2**	134	68.4	135	68.1	**133**	**68.8**	133	68.8	133	69.0
434.zeusmp	46.6	195	46.1	197	**46.3**	**197**	46.6	195	46.1	197	**46.3**	**197**
435.gromacs	176	40.5	176	40.5	**176**	**40.5**	176	40.5	176	40.5	**176**	**40.5**
436.cactusADM	17.6	680	**17.6**	**681**	17.4	685	17.6	680	**17.6**	**681**	17.4	685
437.leslie3d	**30.7**	**306**	30.5	308	30.8	305	**30.7**	**306**	30.5	308	30.8	305
444.namd	**297**	**27.0**	296	27.1	297	27.0	**289**	**27.8**	289	27.8	289	27.8
447.dealII	**221**	**51.8**	221	51.8	217	52.6	**221**	**51.8**	221	51.8	217	52.6
450.soplex	200	41.6	201	41.5	**201**	**41.5**	200	41.6	201	41.5	**201**	**41.5**
453.povray	**104**	**51.1**	104	51.2	104	51.1	93.5	56.9	**93.0**	**57.2**	92.2	57.7
454.calculix	**166**	**49.8**	165	49.9	166	49.6	**149**	**55.4**	149	55.4	149	55.3
459.GemsFDTD	**49.0**	**217**	47.9	222	50.8	209	42.0	253	42.6	249	**42.2**	**251**
465.tonto	261	37.8	**261**	**37.6**	262	37.6	202	48.6	203	48.4	**203**	**48.5**
470.lbm	21.6	636	21.5	639	**21.5**	**638**	21.6	636	21.5	639	**21.5**	**638**
481.wrf	**102**	**110**	103	109	102	110	**102**	**110**	103	109	102	110
482.sphinx3	**271**	**71.9**	273	71.5	271	72.0	**271**	**71.9**	273	71.5	271	72.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS Configuration:
  Intel Hyperthreading Option set to Disabled
  Power Profile set to Custom
  Power Regulator set to Static High Performance Mode
  Minimum Processor Idle Power Core C-State set to C6 State
  Minimum Processor Idle Power Package C-State set to No Package State
  Collaborative Power Control set to Disabled
```

Continued on next page

Platform Notes (Continued)

```
      QPI Snoop Configuration set to Home Snoop
      Thermal Configuration set to Maximum Cooling
      Processor Power and Utilization Monitoring set to Disabled
      Memory Double Refresh Rate set to 1x Refresh

    Sysinfo program /cpu2006/config/sysinfo.rev6914
    $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
    running on ML350g9.localdomain Sun May 17 18:39:39 2015

    This section contains SUT (System Under Test) info as seen by
    some common utilities.  To remove or add to this section, see:
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2630 v3 @ 2.40GHz
          2 "physical id"s (chips)
          16 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 8
          siblings  : 8
          physical 0: cores 0 1 2 3 4 5 6 7
          physical 1: cores 0 1 2 3 4 5 6 7
       cache size : 20480 KB

    From /proc/meminfo
       MemTotal:       263715760 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       os-release:
          NAME="Red Hat Enterprise Linux Server"
          VERSION="7.0 (Maipo)"
          ID="rhel"
          ID_LIKE="fedora"
          VERSION_ID="7.0"
          PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
          ANSI_COLOR="0;31"
          CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
       redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
       system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

    uname -a:
       Linux ML350g9.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT
       2014 x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 May 17 18:35

    SPEC is set to: /cpu2006
```

Continued on next page

Platform Notes (Continued)

```
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda4      xfs   367G   15G  353G   4% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS HP P92 08/26/2014
    Memory:
     16x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1866 MHz
     8x UNKNOWN NOT AVAILABLE

  (End of data from sysinfo program)
  Regarding the sysinfo display about the memory installed, the correct amount of
  memory is 256 GB and the dmidecode description should have one line reading as:
     16x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1866 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
OMP_NUM_THREADS = "16"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 2 13:48:46 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 June 2015.