SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885H V3 (Intel Xeon E7-4850 v3)

SPECfp®_rate2006 = 1570

SPECfp_rate_base2006 = 1530

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2015
Hardware Availability: May-2015
Software Availability: Sep-2014

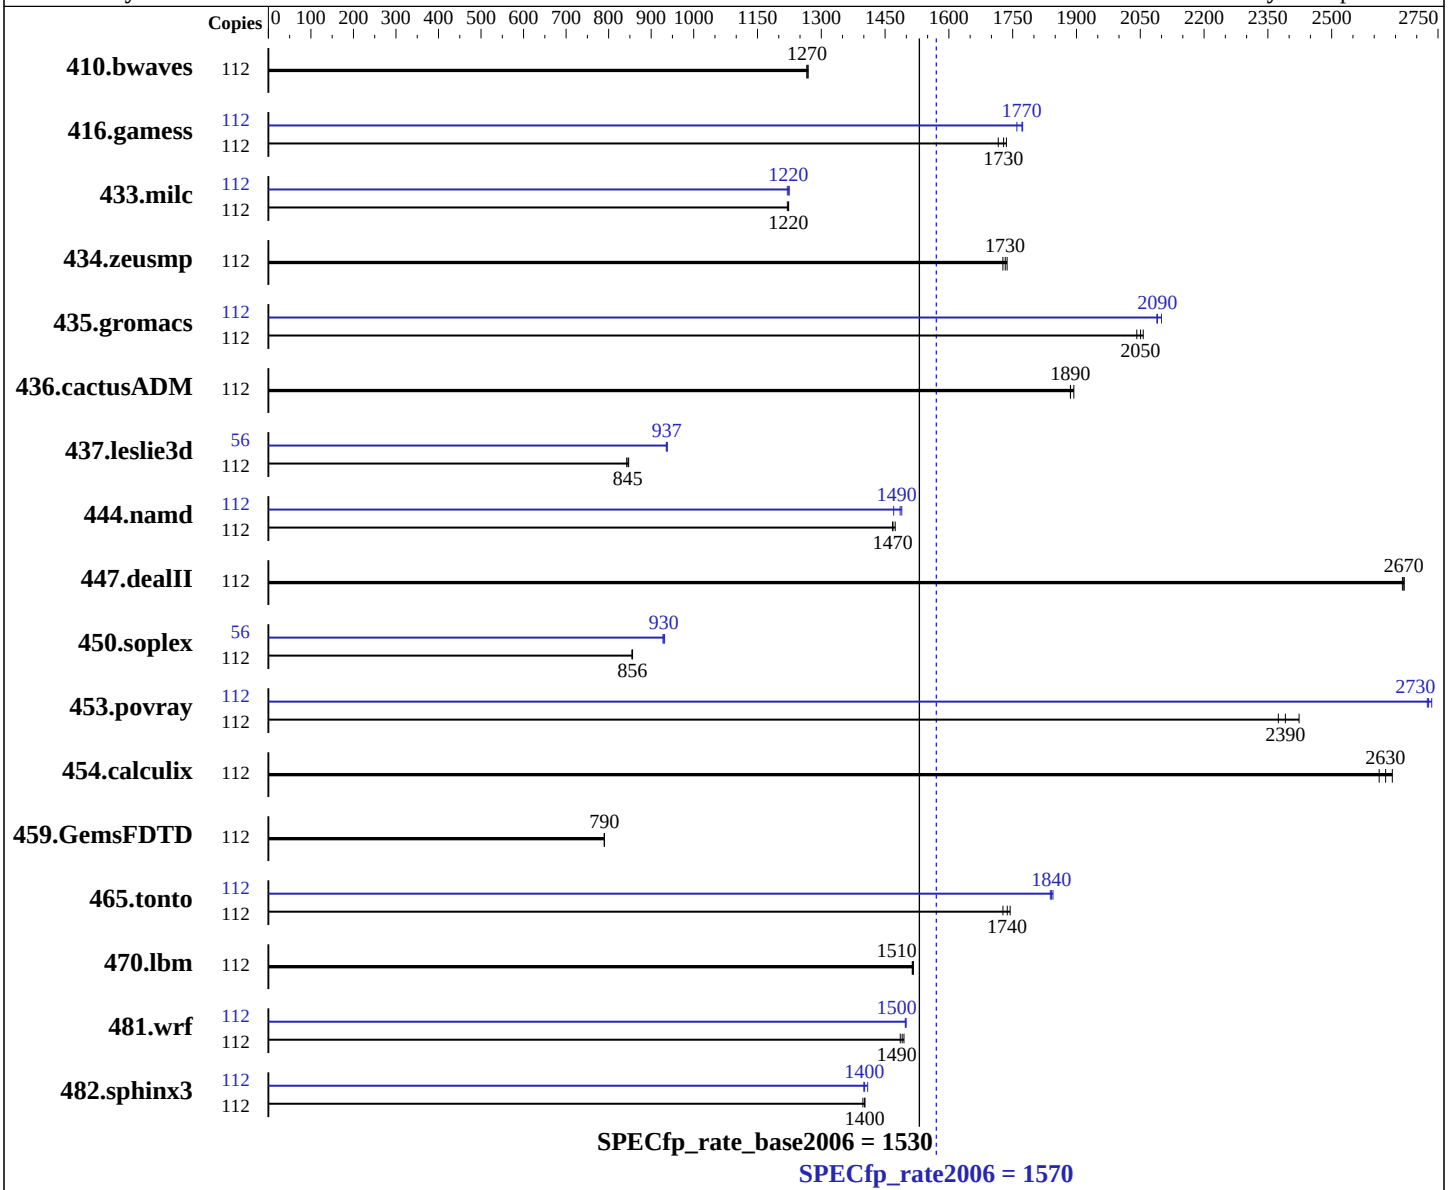

Hardware

CPU Name:	Intel Xeon E7-4850 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	56 cores, 4 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885H V3 (Intel Xeon E7-4850 v3)

SPECfp_rate2006 = 1570

SPECfp_rate_base2006 = 1530

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2015
Hardware Availability: May-2015
Software Availability: Sep-2014

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
Disk Subsystem: 2 x 300 GB SAS, 10K RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	1199	1270	1202	1270	**1201**	**1270**	112	1199	1270	1202	1270	**1201**	**1270**
416.gamess	112	1278	1720	1264	1740	**1269**	**1730**	112	**1238**	**1770**	1246	1760	1237	1770
433.milc	112	841	1220	843	1220	**841**	**1220**	112	843	1220	**841**	**1220**	840	1220
434.zeusmp	112	590	1730	587	1740	**588**	**1730**	112	590	1730	587	1740	**588**	**1730**
435.gromacs	112	392	2040	**390**	**2050**	389	2060	112	383	2090	**383**	**2090**	381	2100
436.cactusADM	112	710	1890	**710**	**1890**	707	1890	112	710	1890	**710**	**1890**	707	1890
437.leslie3d	112	1250	842	**1245**	**845**	1243	847	56	**562**	**937**	563	936	561	938
444.namd	112	**612**	**1470**	612	1470	609	1470	112	**605**	**1490**	603	1490	611	1470
447.dealII	112	481	2670	480	2670	**480**	**2670**	112	481	2670	480	2670	**480**	**2670**
450.soplex	112	1091	856	**1092**	**856**	1093	855	56	503	928	501	932	**502**	**930**
453.povray	112	**249**	**2390**	251	2370	246	2420	112	**218**	**2730**	218	2740	219	2720
454.calculix	112	354	2610	**352**	**2630**	350	2640	112	354	2610	**352**	**2630**	350	2640
459.GemsFDTD	112	1504	790	1505	790	**1504**	**790**	112	1504	790	1505	790	**1504**	**790**
465.tonto	112	632	1740	638	1730	**634**	**1740**	112	**599**	**1840**	599	1840	597	1840
470.lbm	112	1017	1510	1015	1520	**1016**	**1510**	112	1017	1510	1015	1520	**1016**	**1510**
481.wrf	112	842	1490	**840**	**1490**	837	1490	112	835	1500	835	1500	**835**	**1500**
482.sphinx3	112	**1557**	**1400**	1562	1400	1556	1400	112	1549	1410	1559	1400	**1557**	**1400**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Turbo mode set with:
 cpupower -c all frequency-set -g performance
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Set Lock_step to disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Set DRAM Maintenace to Manual
Set DRAM Maintenace Mode to pTRR
Set Patrol Scrub to Enabled
Set Memory Power Saving to disabled
C-State set to C3
VT Support set to disabled
CPU C1E set to disabled
Sysinfo program /spec/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on RH5885HV3 Thu May 28 07:03:48 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-4850 v3 @ 2.20GHz
      4 "physical id"s (chips)
      112 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 14
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
   cache size : 35840 KB

From /proc/meminfo
   MemTotal:       1056465940 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.0 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.0"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

Continued on next page

Platform Notes (Continued)

```
uname -a:
   Linux RH5885HV3 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 27 10:55

SPEC is set to: /spec
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   537G   44G  494G   9% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS American Megatrends Inc. BLISV705 03/30/2015
  Memory:
   32x NO DIMM NO DIMM
   64x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1333 MHz

(End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 1 TB and the dmidecode description should have two lines reading as:
   32x NO DIMM NO DIMM
   64x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1333 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-HSW-RevG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-HSW-RevG.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jun 17 10:48:52 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 June 2015.