



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp[®]_rate2006 = 1840

SPECfp_rate_base2006 = 1790

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Nov-2014

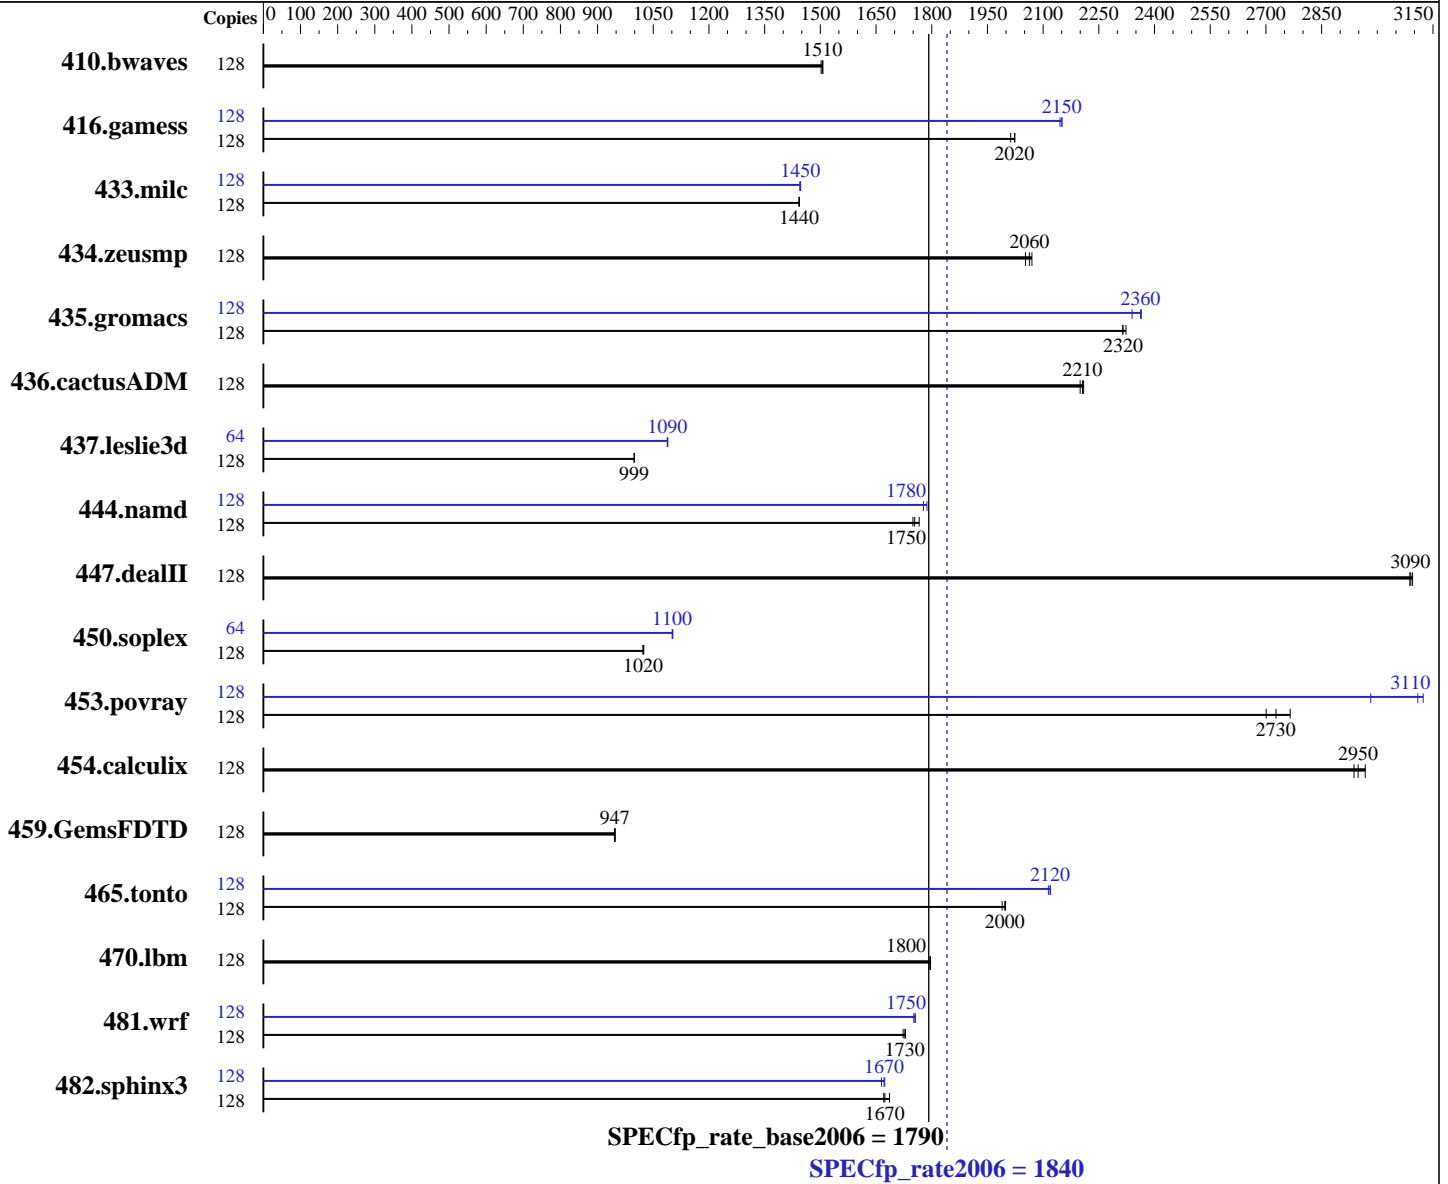

Hardware

CPU Name: Intel Xeon E7-8860 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 1840

SPECfp_rate_base2006 = 1790

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Nov-2014

L3 Cache: 40 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 1 x 300 GB SAS, 15K RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 128 | 1154 | 1510 | <u>1156</u> | <u>1510</u> | 1158 | 1500 | 128 | 1154 | 1510 | <u>1156</u> | <u>1510</u> | 1158 | 1500 |
| 416.gamess | 128 | 1238 | 2020 | 1245 | 2010 | <u>1239</u> | <u>2020</u> | 128 | <u>1166</u> | <u>2150</u> | 1165 | 2150 | 1168 | 2150 |
| 433.milc | 128 | <u>814</u> | <u>1440</u> | 814 | 1440 | 815 | 1440 | 128 | 812 | 1450 | 813 | 1440 | <u>812</u> | <u>1450</u> |
| 434.zeusmp | 128 | 563 | 2070 | 567 | 2050 | <u>565</u> | <u>2060</u> | 128 | 563 | 2070 | 567 | 2050 | <u>565</u> | <u>2060</u> |
| 435.gromacs | 128 | 395 | 2310 | 393 | 2320 | <u>395</u> | <u>2320</u> | 128 | 387 | 2360 | 391 | 2340 | <u>387</u> | <u>2360</u> |
| 436.cactusADM | 128 | 695 | 2200 | 692 | 2210 | <u>693</u> | <u>2210</u> | 128 | 695 | 2200 | 692 | 2210 | <u>693</u> | <u>2210</u> |
| 437.leslie3d | 128 | <u>1205</u> | <u>999</u> | 1205 | 999 | 1204 | 999 | 64 | 553 | 1090 | <u>553</u> | <u>1090</u> | 552 | 1090 |
| 444.namd | 128 | 581 | 1770 | <u>585</u> | <u>1750</u> | 587 | 1750 | 128 | <u>577</u> | <u>1780</u> | 577 | 1780 | 574 | 1790 |
| 447.dealII | 128 | 473 | 3090 | 474 | 3090 | <u>474</u> | <u>3090</u> | 128 | 473 | 3090 | 474 | 3090 | <u>474</u> | <u>3090</u> |
| 450.soplex | 128 | 1042 | 1020 | 1044 | 1020 | <u>1044</u> | <u>1020</u> | 64 | <u>485</u> | <u>1100</u> | 485 | 1100 | 484 | 1100 |
| 453.povray | 128 | 252 | 2700 | <u>250</u> | <u>2730</u> | 246 | 2770 | 128 | <u>219</u> | <u>3110</u> | 228 | 2980 | 218 | 3120 |
| 454.calculix | 128 | 360 | 2940 | 356 | 2970 | <u>358</u> | <u>2950</u> | 128 | 360 | 2940 | 356 | 2970 | <u>358</u> | <u>2950</u> |
| 459.GemsFDTD | 128 | 1436 | 946 | <u>1435</u> | <u>947</u> | 1433 | 948 | 128 | 1436 | 946 | <u>1435</u> | <u>947</u> | 1433 | 948 |
| 465.tonto | 128 | 630 | 2000 | <u>631</u> | <u>2000</u> | 633 | 1990 | 128 | <u>595</u> | <u>2120</u> | 594 | 2120 | 596 | 2110 |
| 470.lbm | 128 | 979 | 1800 | <u>979</u> | <u>1800</u> | 980 | 1790 | 128 | 979 | 1800 | <u>979</u> | <u>1800</u> | 980 | 1790 |
| 481.wrf | 128 | <u>828</u> | <u>1730</u> | 827 | 1730 | 830 | 1720 | 128 | 814 | 1760 | <u>815</u> | <u>1750</u> | 816 | 1750 |
| 482.sphinx3 | 128 | 1479 | 1690 | <u>1490</u> | <u>1670</u> | 1493 | 1670 | 128 | 1491 | 1670 | 1499 | 1660 | <u>1493</u> | <u>1670</u> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 1840

SPECfp_rate_base2006 = 1790

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Nov-2014

Platform Notes

CPU performance set to Enterprise
 Power Technology set to Performance
 Energy Performance BIAS setting set to Balanced Performance
 Memory RAS configuration set to Maximum Performance
 Memory Power Saving Mode set to Disabled
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6914
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
 running on sles12 Tue Jun 9 16:20:24 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8860 v3 @ 2.20GHz
 4 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 16
  siblings  : 32
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 40960 KB
```

```
From /proc/meminfo
MemTotal:      1058824284 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux sles12 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014 (9879bd4)
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 1840

SPECfp_rate_base2006 = 1790

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Jun-2015
Hardware Availability: May-2015
Software Availability: Nov-2014

Platform Notes (Continued)

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 9 03:15

SPEC is set to: /opt/cpu2006-1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 xfs 250G 11G 240G 5% /
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C460M4.2.0.5b.0.052420152246 05/24/2015

Memory:
64x 0xCE00 M393A2G40DB0-CPB 16 GB 2 rank 1600 MHz
32x NO DIMM NO DIMM 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 1840

SPECfp_rate_base2006 = 1790

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Nov-2014

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 1840

SPECfp_rate_base2006 = 1790

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Nov-2014

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
 -unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 1840

SPECfp_rate_base2006 = 1790

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Nov-2014

Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.20150505.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.20150505.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 1840

SPECfp_rate_base2006 = 1790

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Nov-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jul 8 11:07:26 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 July 2015.