SPEC® CINT2006 Result

Huawei

Huawei XH622 V3 (Intel Xeon E5-2609 v3)

SPECint®_rate2006 = 319

SPECint_rate_base2006 = 309

CPU2006 license:	3175	**Test date:**	May-2015
Test sponsor:	Huawei	**Hardware Availability:**	Sep-2014
Tested by:	Huawei	**Software Availability:**	Sep-2014

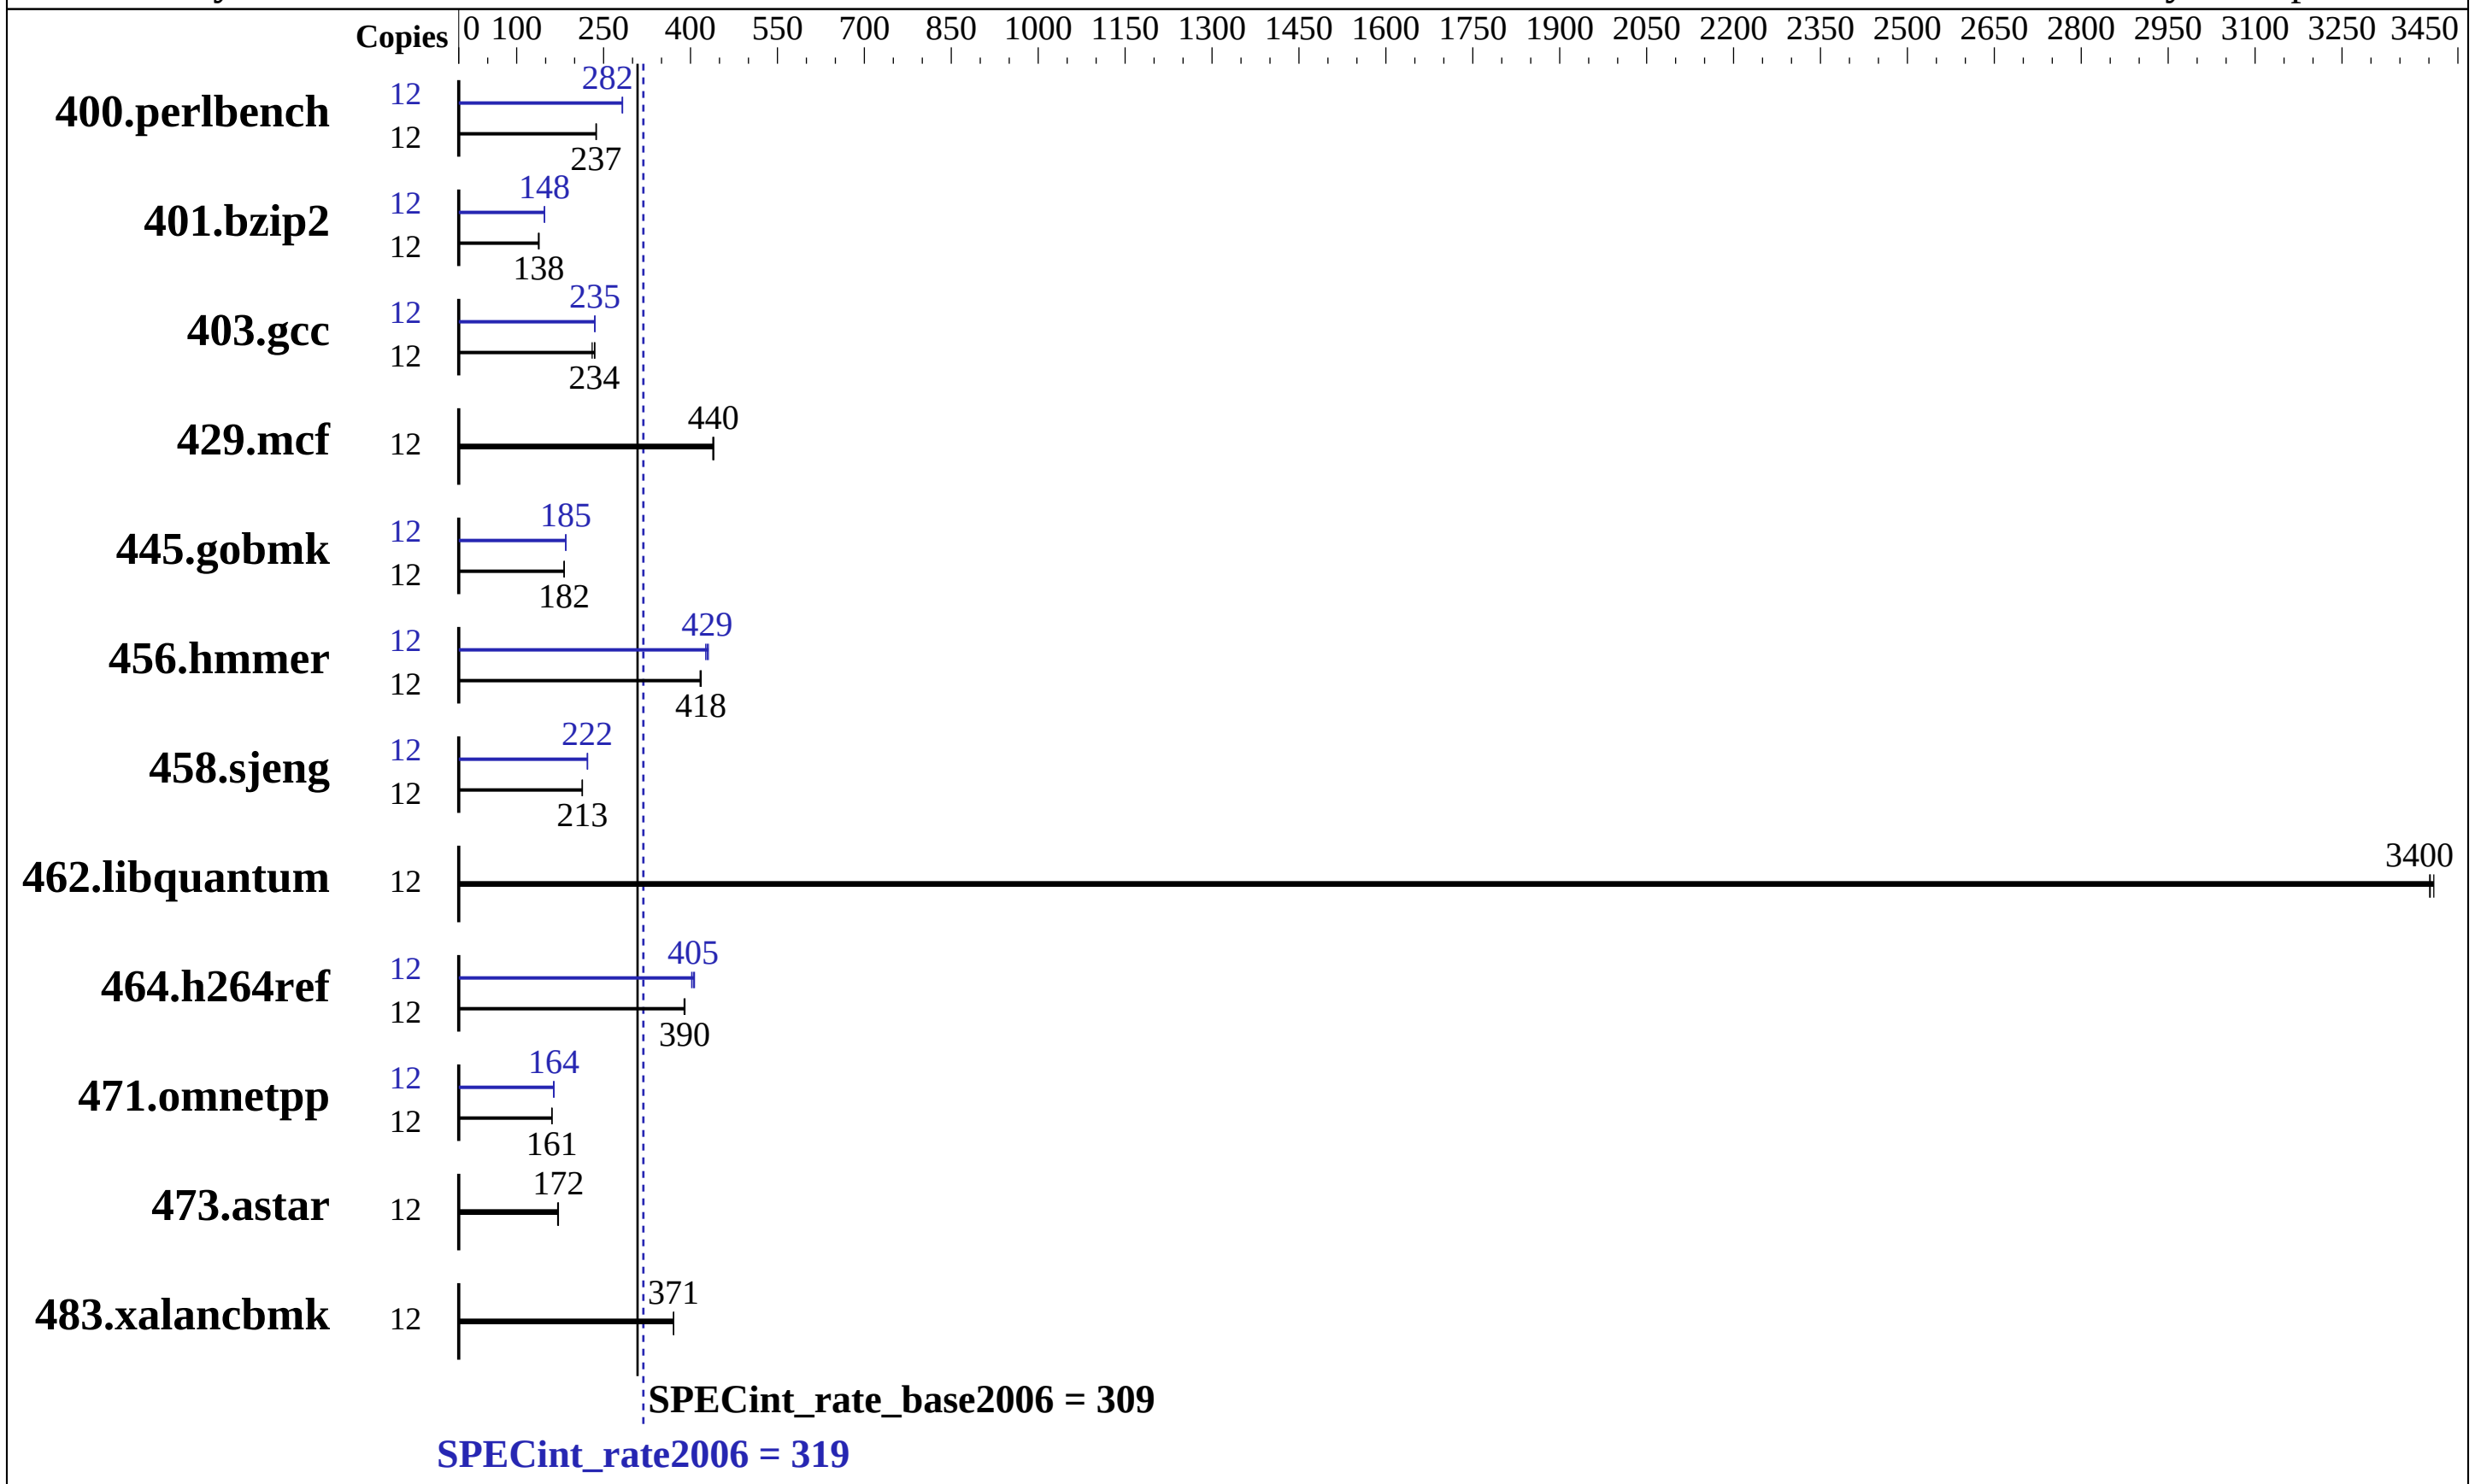

Hardware

CPU Name:	Intel Xeon E5-2609 v3
CPU Characteristics:	
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	12	495	237	**494**	**237**	494	237	12	**415**	**282**	415	283	415	282
401.bzip2	12	**839**	**138**	841	138	835	139	12	781	148	783	148	**782**	**148**
403.gcc	12	411	235	420	230	**412**	**234**	12	412	235	411	235	**411**	**235**
429.mcf	12	250	439	**249**	**440**	249	440	12	250	439	**249**	**440**	249	440
445.gobmk	12	**691**	**182**	691	182	693	182	12	**681**	**185**	681	185	681	185
456.hmmer	12	268	418	269	417	**268**	**418**	12	260	431	**261**	**429**	263	426
458.sjeng	12	**681**	**213**	681	213	680	213	12	654	222	653	222	**654**	**222**
462.libquantum	12	72.9	3410	**73.1**	**3400**	73.1	3400	12	72.9	3410	**73.1**	**3400**	73.1	3400
464.h264ref	12	**681**	**390**	683	389	680	390	12	**656**	**405**	653	407	661	402
471.omnetpp	12	467	161	466	161	**466**	**161**	12	**457**	**164**	458	164	456	164
473.astar	12	**490**	**172**	493	171	490	172	12	**490**	**172**	493	171	490	172
483.xalancbmk	12	**223**	**371**	223	371	223	371	12	**223**	**371**	223	371	223	371

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Set Snoop Mode to ES mode
Set Patrol Scrub to Disable
Sysinfo program /spec15/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Thu May  7 12:41:56 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2609 v3 @ 1.90GHz
      2 "physical id"s (chips)
      12 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
```

Continued on next page

Platform Notes (Continued)

```
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 6
       siblings  : 6
       physical 0: cores 0 1 2 3 4 5
       physical 1: cores 0 1 2 3 4 5
    cache size : 15360 KB

 From /proc/meminfo
    MemTotal:       263579840 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux Server"
       VERSION="7.0 (Maipo)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="7.0"
       PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
       ANSI_COLOR="0;31"
       CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
    redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

 uname -a:
    Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
    EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 May 7 08:06

 SPEC is set to: /spec15
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      xfs   440G   13G  428G   3% /
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS Insyde Corp. 1.35 03/30/2015
   Memory:
    8x Micron 36ASF2G72PZ-2G1A2 16 GB 1 rank 2133 MHz, configured at 1600 MHz
    8x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1600 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec15/libs/32:/spec15/libs/64:/spec15/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 The Huawei XH622 V3 and Huawei XH628 V3 and Huawei XH620 V3
 are electronically equivalent.
 The results have been measured on a Huawei XH620 V3 model.
```

Base Compiler Invocation

C benchmarks:
`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks:
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch`
`-opt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch`
`-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

Continued on next page

Base Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32`

401.bzip2: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jul 29 12:08:32 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 July 2015.