



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp[®]_rate2006 = 865

Lenovo NeXtScale nx360 M5
(Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate_base2006 = 840

CPU2006 license: 9017


Test date: Aug-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

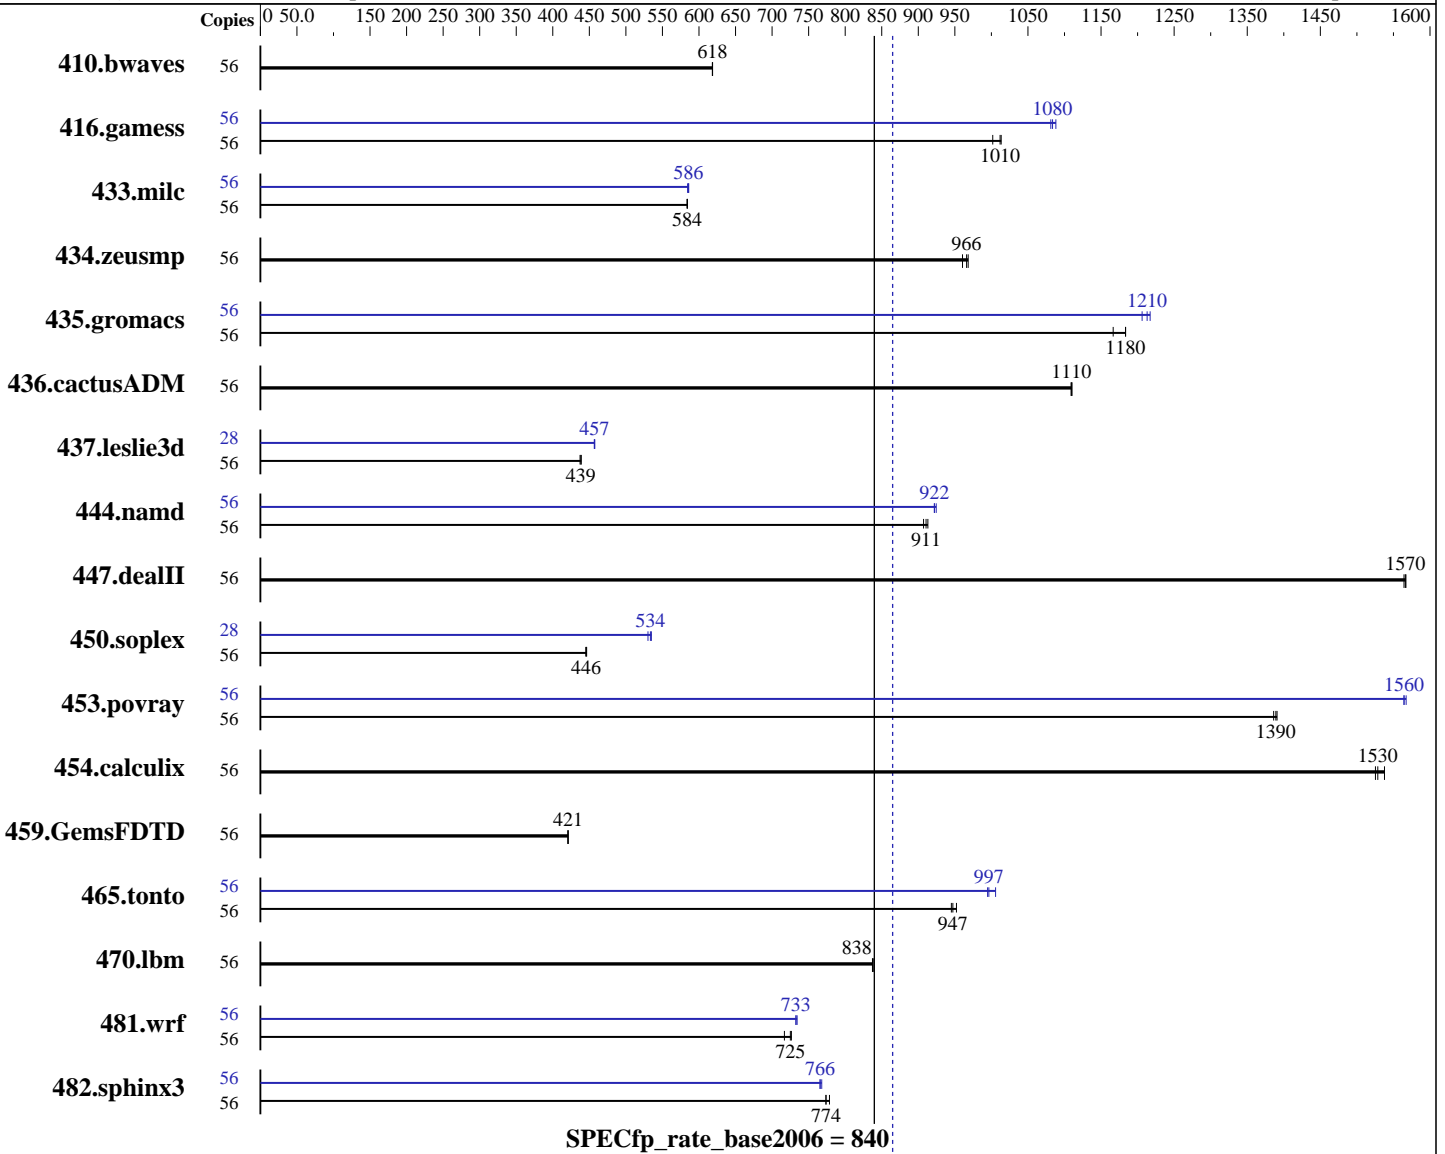

Hardware

CPU Name: Intel Xeon E5-2697 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = **865**

Lenovo NeXtScale nx360 M5
(Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate_base2006 = **840**

CPU2006 license: 9017

Test date: Aug-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1231	618	<u>1231</u>	<u>618</u>	1230	619	56	1231	618	<u>1231</u>	<u>618</u>	1230	619
416.gamess	56	1082	1010	<u>1084</u>	<u>1010</u>	1094	1000	56	1014	1080	<u>1012</u>	<u>1080</u>	1008	1090
433.milc	56	880	584	881	584	880	584	56	878	586	877	586	880	584
434.zeusmp	56	526	968	<u>527</u>	<u>966</u>	531	960	56	526	968	<u>527</u>	<u>966</u>	531	960
435.gromacs	56	343	1170	338	1180	338	1180	56	329	1220	331	1210	330	1210
436.cactusADM	56	603	1110	<u>603</u>	<u>1110</u>	603	1110	56	603	1110	<u>603</u>	<u>1110</u>	603	1110
437.leslie3d	56	1200	439	1204	437	<u>1200</u>	<u>439</u>	28	576	457	<u>576</u>	<u>457</u>	575	457
444.namd	56	492	913	<u>493</u>	<u>911</u>	495	907	56	487	922	486	925	<u>487</u>	<u>922</u>
447.dealII	56	409	1570	409	1560	<u>409</u>	<u>1570</u>	56	409	1570	409	1560	<u>409</u>	<u>1570</u>
450.soplex	56	1046	446	1049	445	<u>1048</u>	<u>446</u>	28	437	535	<u>438</u>	<u>534</u>	440	530
453.povray	56	214	1390	214	1390	215	1390	56	190	1560	190	1570	190	1560
454.calculix	56	300	1540	<u>302</u>	<u>1530</u>	303	1530	56	300	1540	<u>302</u>	<u>1530</u>	303	1530
459.GemsFDTD	56	<u>1412</u>	<u>421</u>	1412	421	1411	421	56	<u>1412</u>	<u>421</u>	1412	421	1411	421
465.tonto	56	579	952	583	945	<u>582</u>	<u>947</u>	56	<u>553</u>	<u>997</u>	548	1010	554	995
470.lbm	56	918	838	918	838	919	837	56	918	838	918	838	919	837
481.wrf	56	861	726	<u>863</u>	<u>725</u>	873	717	56	<u>854</u>	<u>733</u>	854	733	852	734
482.sphinx3	56	1410	774	1402	779	1411	774	56	1421	768	<u>1425</u>	<u>766</u>	1426	766

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS setting:
Operating Mode set to "Efficiency-Favor Performance"
Sysinfo program /home/SPEC/config/sysinfo.rev6914

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 865

Lenovo NeXtScale nx360 M5
(Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate_base2006 = 840

CPU2006 license: 9017

Test date: Aug-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

Platform Notes (Continued)

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on wilykat.labs.lenovo.com Thu Aug 27 17:09:18 2015

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697 v3 @ 2.60GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 7
siblings : 14
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

```
From /proc/meminfo
MemTotal: 263582684 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux wilykat.labs.lenovo.com 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 27 06:05

```
SPEC is set to: /home/SPEC
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs 927G 94G 833G 11% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 865

Lenovo NeXtScale nx360 M5
(Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate_base2006 = 840

CPU2006 license: 9017

Test date: Aug-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[THE106CUS-1.11]- 02/16/2015

Memory:

7x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz

9x Hynix HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPEC/libs/32:/home/SPEC/libs/64:/home/SPEC/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 865

Lenovo NeXtScale nx360 M5
(Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate_base2006 = 840

CPU2006 license: 9017

Test date: Aug-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

Base Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 865

Lenovo NeXtScale nx360 M5
(Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate_base2006 = 840

CPU2006 license: 9017

Test date: Aug-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -prof-gen(pass 1) -ipo -O3 -no-prec-div
            -prof-use(pass 2) -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 865

Lenovo NeXtScale nx360 M5
(Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate_base2006 = 840

CPU2006 license: 9017

Test date: Aug-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.20150923.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.20150923.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 23 11:04:00 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 September 2015.