SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint®_rate2006 = 1100

SPECint_rate_base2006 = 1050

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Oct-2015
Hardware Availability: Sep-2014
Software Availability: Aug-2015

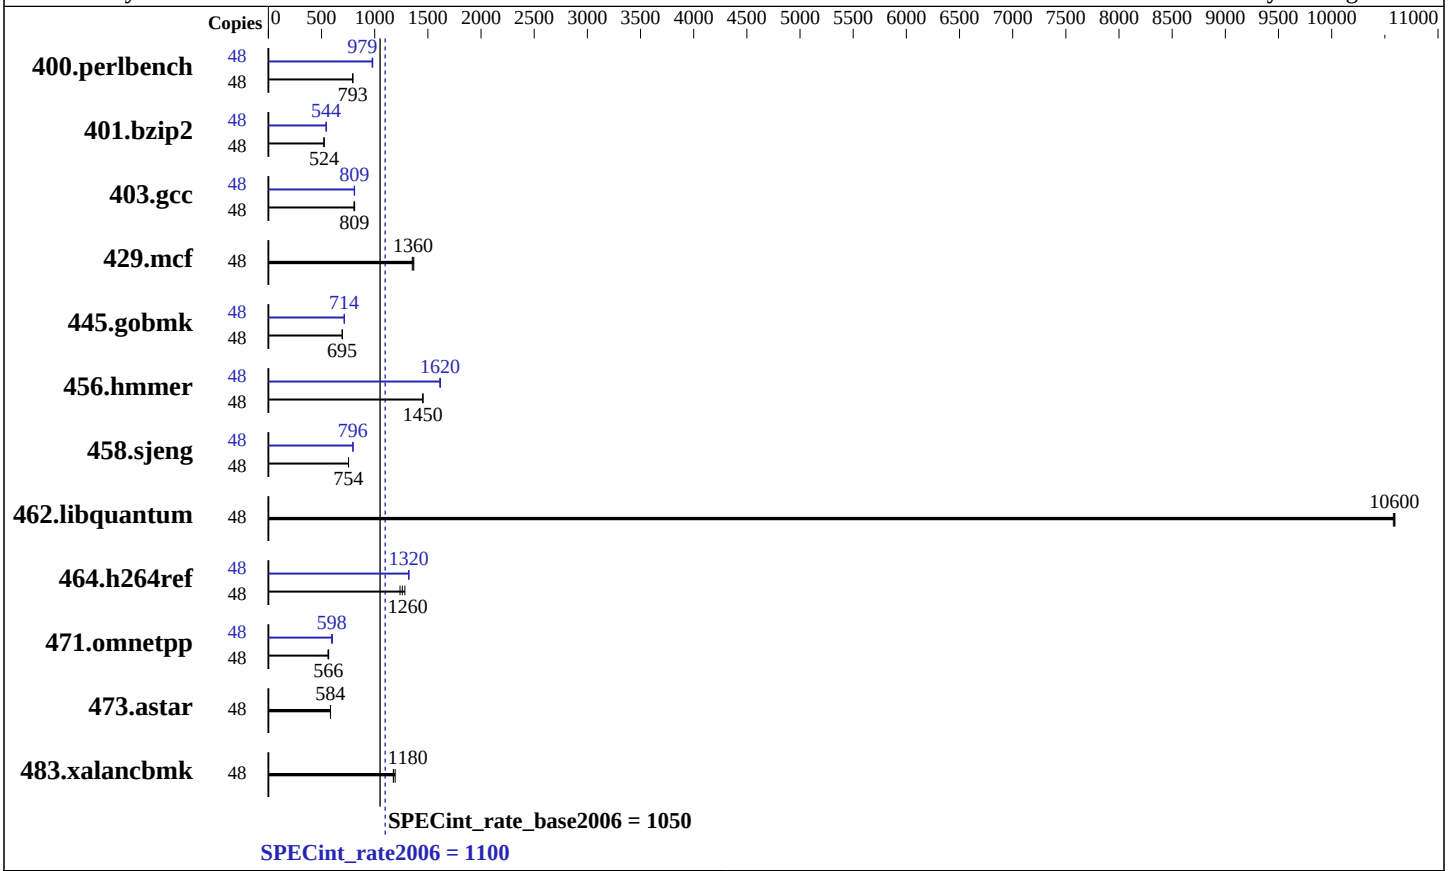

Hardware

CPU Name:	Intel Xeon E5-2680 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400P-R, running at 2133 MHz)
Disk Subsystem:	1 x 240 GB SATA II SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.1 (Maipo) 3.10.0-229.11.1.el7.x86_64
Compiler:	C/C++: Version 16.0.0.047 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_rate2006 = 1100

SPECint_rate_base2006 = 1050

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Oct-2015
Hardware Availability: Sep-2014
Software Availability: Aug-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	592	792	589	796	**591**	**793**	48	**479**	**979**	481	975	478	982
401.bzip2	48	**884**	**524**	885	523	884	524	48	851	545	**852**	**544**	852	543
403.gcc	48	480	805	**478**	**809**	476	811	48	477	811	478	808	**478**	**809**
429.mcf	48	324	1350	320	1370	**322**	**1360**	48	324	1350	320	1370	**322**	**1360**
445.gobmk	48	**724**	**695**	725	695	724	695	48	706	714	**705**	**714**	705	714
456.hmmer	48	309	1450	308	1450	**308**	**1450**	48	277	1620	**277**	**1620**	278	1610
458.sjeng	48	770	754	**771**	**754**	771	753	48	730	795	**730**	**796**	730	796
462.libquantum	48	**93.9**	**10600**	94.0	10600	93.9	10600	48	**93.9**	**10600**	94.0	10600	93.9	10600
464.h264ref	48	858	1240	827	1280	**843**	**1260**	48	805	1320	**805**	**1320**	804	1320
471.omnetpp	48	**530**	**566**	529	567	535	561	48	504	595	**502**	**598**	498	602
473.astar	48	577	584	577	584	**577**	**584**	48	577	584	577	584	**577**	**584**
483.xalancbmk	48	**281**	**1180**	282	1180	278	1190	48	**281**	**1180**	282	1180	278	1190

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Bios Settings
Hyper-Threading (All)= Enable
Power Technology = Energy Efficient
Enforce POR = Disabled
Memory Frequency: = 2133
COD Enable = Enable

BMC Setting
Fan Mode = Full Speed

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on SUT Fri Oct 16 10:47:00 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2680 v3 @ 2.50GHz
          2 "physical id"s (chips)
          48 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 12
          siblings  : 24
          physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
          physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
       cache size : 15360 KB

    From /proc/meminfo
       MemTotal:       263864620 kB
       HugePages_Total:       1
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       os-release:
          NAME="Red Hat Enterprise Linux Server"
          VERSION="7.0 (Maipo)"
          ID="rhel"
          ID_LIKE="fedora"
          VERSION_ID="7.0"
          PRETTY_NAME="Red Hat Enterprise Linux"
          ANSI_COLOR="0;31"
          CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
       os-release.rpmnew:
          NAME="Red Hat Enterprise Linux Server"
          VERSION="7.1 (Maipo)"
          ID="rhel"
          ID_LIKE="fedora"
          VERSION_ID="7.1"
          PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
          ANSI_COLOR="0;31"
          CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
       redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
       system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

    uname -a:
       Linux SUT 3.10.0-229.11.1.el7.x86_64 #5 SMP Mon Sep 14 17:11:19 CEST 2015
       x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Oct 16 10:46

    SPEC is set to: /cpu2006.1.2
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda1      ext4  212G   39G  163G  19% /
```

Continued on next page

Platform Notes (Continued)

```
 Additional information from dmidecode:
   BIOS American Megatrends Inc. 1.0c 01/07/2015
   Memory:
    16x   16 GB
    16x Hynix Semiconductor (date:15/28) HMA42GR7AFR4N-UH 16 GB 2133 MHz 2 rank

 (End of data from sysinfo program)
 dmidecode does not properly detect memory modules
 16 modules of 16 GB were used to run the test (256 GB total)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory
 using RedHat EL 7.1
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/lib/ia32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/lib/ia32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 3 11:56:34 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 November 2015.