



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant XL170r Gen9
(3.50 GHz, Intel Xeon E5-2637 v3)

SPECint_rate2006 = 466

SPECint_rate_base2006 = 446

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Jul-2015

Software Availability: Oct-2014

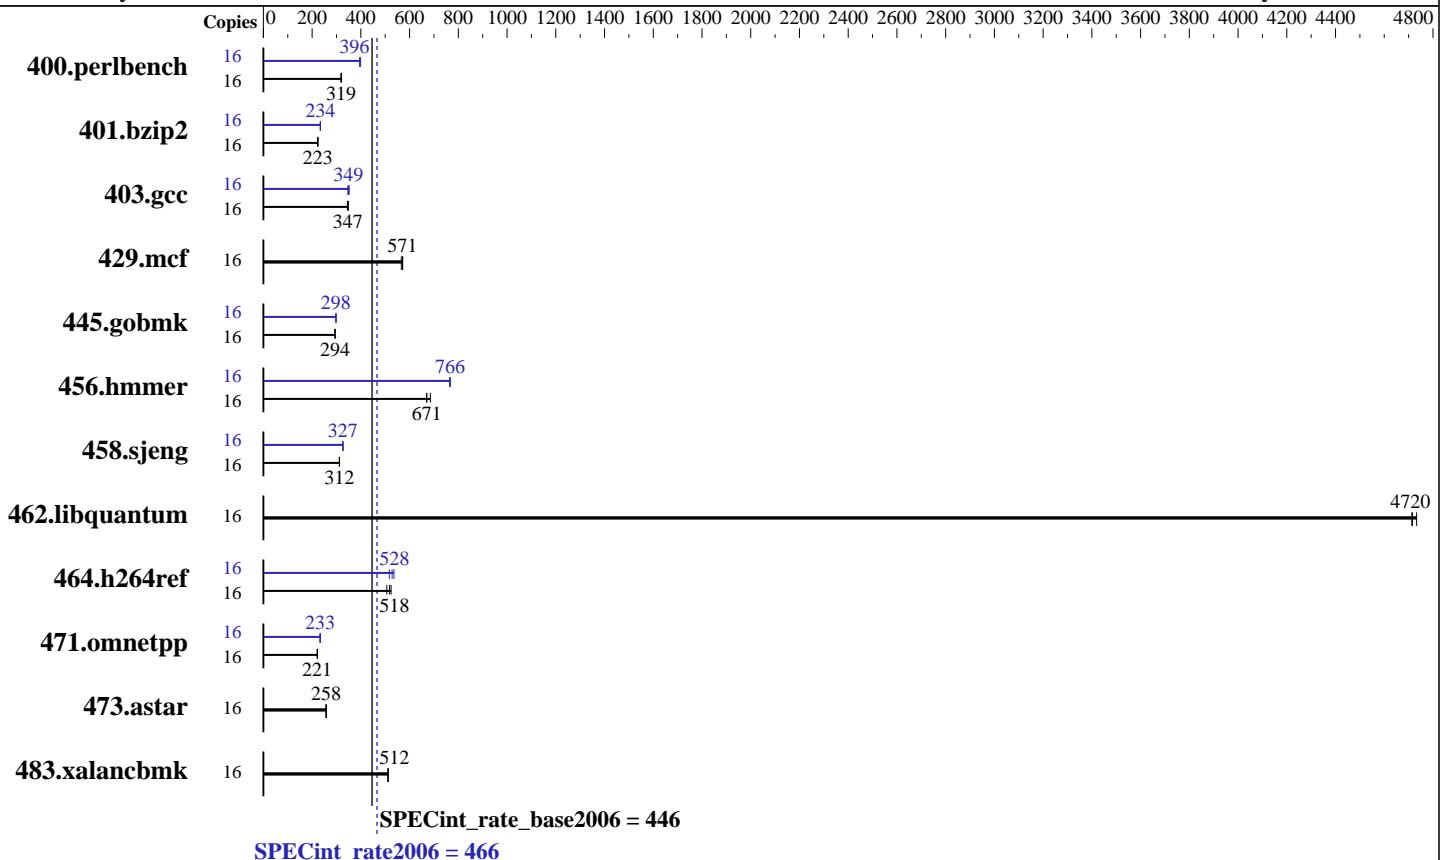

Hardware

CPU Name: Intel Xeon E5-2637 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 3500
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 300 GB 15 K SAS, RAID 0
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
Kernel-3.12.28-4-default
Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant XL170r Gen9
(3.50 GHz, Intel Xeon E5-2637 v3)

SPECint_rate2006 = 466

SPECint_rate_base2006 = 446

CPU2006 license: 3

Test date: Oct-2015

Test sponsor: HPE

Hardware Availability: Jul-2015

Tested by: HPE

Software Availability: Oct-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	490	319	489	320	490	319	16	392	399	395	396	395	395
401.bzip2	16	693	223	689	224	691	223	16	660	234	660	234	661	234
403.gcc	16	372	347	369	349	374	345	16	371	347	369	349	366	352
429.mcf	16	258	566	255	571	255	572	16	258	566	255	571	255	572
445.gobmk	16	570	294	571	294	571	294	16	563	298	564	298	563	298
456.hmmer	16	223	671	218	685	223	670	16	195	766	195	765	195	767
458.sjeng	16	620	312	619	313	621	312	16	593	327	593	327	593	326
462.libquantum	16	70.0	4730	70.3	4710	70.3	4720	16	70.0	4730	70.3	4710	70.3	4720
464.h264ref	16	684	518	699	507	676	524	16	685	517	661	536	670	528
471.omnetpp	16	452	221	452	221	451	222	16	429	233	431	232	428	234
473.astar	16	436	258	437	257	435	258	16	436	258	437	257	435	258
483.xalancbmk	16	216	512	216	511	215	512	16	216	512	216	511	215	512

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Platform Notes

BIOS Configuration

HP Power Profile set to Custom

Power Regulator set to Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C6-State

Minimum Processor Idle Power Package C-State set to No Package State

Energy/Performance Bias set to Maximum Performance

Collaborative Power Control set to Disabled

QPI Snoop Configuration set to Cluster on Die

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x Refresh

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL170r Gen9

(3.50 GHz, Intel Xeon E5-2637 v3)

SPECint_rate2006 = 466

SPECint_rate_base2006 = 446

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Jul-2015

Software Availability: Oct-2014

Platform Notes (Continued)

```
Sysinfo program /root/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date::: 2014-06-25 #$
running on linux-u2pv Fri Oct 30 14:40:35 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2637 v3 @ 3.50GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 4
        siblings : 8
        physical 0: cores 0 1 4 5
        physical 1: cores 0 1 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264298848 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-u2pv 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 30 14:35 last=5
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL170r Gen9

(3.50 GHz, Intel Xeon E5-2637 v3)

SPECint_rate2006 = 466

SPECint_rate_base2006 = 446

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Jul-2015

Software Availability: Oct-2014

Platform Notes (Continued)

SPEC is set to: /root/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	btrfs	278G	13G	265G	5%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U14 07/20/2015

Memory:
16x HP 752369-081 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant XL170r Gen9
(3.50 GHz, Intel Xeon E5-2637 v3)

SPECint_rate2006 = 466

SPECint_rate_base2006 = 446

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Jul-2015

Software Availability: Oct-2014

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant XL170r Gen9
(3.50 GHz, Intel Xeon E5-2637 v3)

SPECint_rate2006 = 466

SPECint_rate_base2006 = 446

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Jul-2015

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant XL170r Gen9
(3.50 GHz, Intel Xeon E5-2637 v3)

SPECint_rate2006 = 466

SPECint_rate_base2006 = 446

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Jul-2015

Software Availability: Oct-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 17 19:17:45 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2015.