SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Z170MPLUS motherboard (Intel Core i7-6700)

SPECfp®_rate2006 = 182

SPECfp_rate_base2006 = 176

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2015
Hardware Availability: Sep-2015
Software Availability: Aug-2015

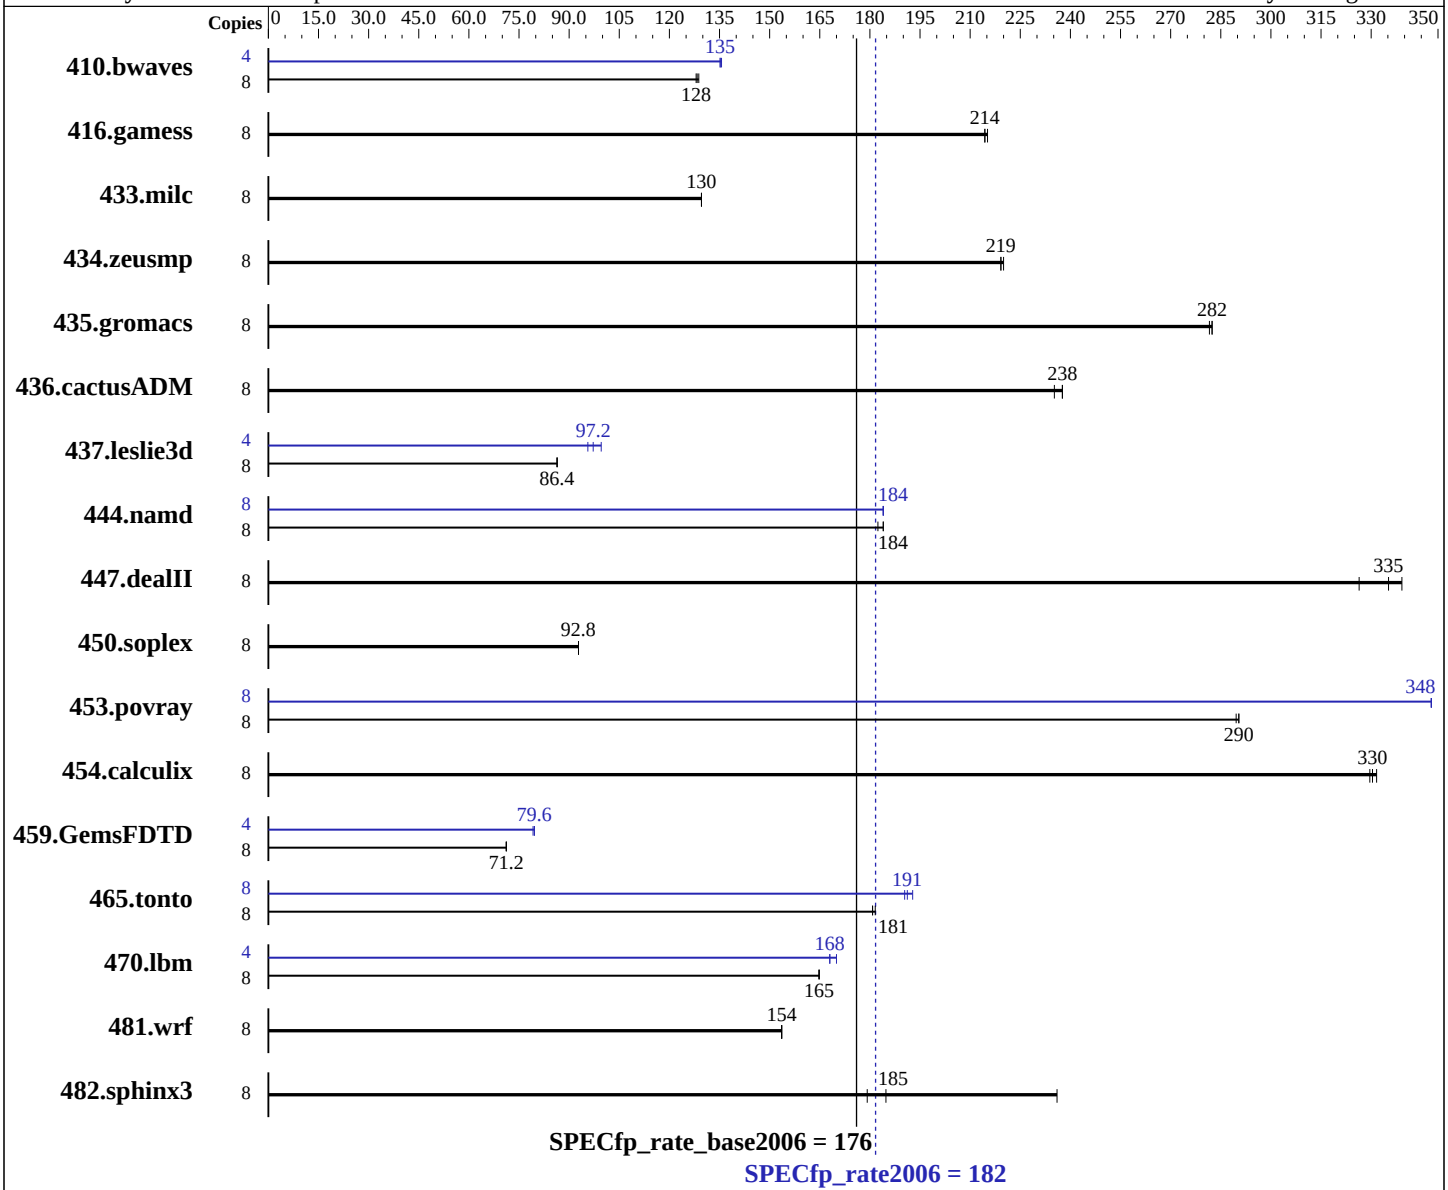

Hardware

CPU Name:	Intel Core i7-6700
CPU Characteristics:	Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Microsoft Windows 10 Pro 10.0.10240 N/A Build 10240
Compiler:	C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows; Fortran: Version 16.0.0.110 of Intel Fortran Studio XE for Windows; Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Z170MPLUS motherboard (Intel Core i7-6700)

SPECfp_rate2006 = 182

SPECfp_rate_base2006 = 176

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2015
Hardware Availability: Sep-2015
Software Availability: Aug-2015

L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx4 PC4-2133P-U)
Disk Subsystem:	1 TB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 11.0 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	847	128	846	129	**847**	**128**	4	**402**	**135**	401	136	403	135
416.gamess	8	729	215	**730**	**214**	730	214	8	729	215	**730**	**214**	730	214
433.milc	8	**566**	**130**	565	130	566	130	8	**566**	**130**	565	130	566	130
434.zeusmp	8	333	219	**332**	**219**	332	220	8	333	219	**332**	**219**	332	220
435.gromacs	8	**202**	**282**	202	282	203	282	8	**202**	**282**	202	282	203	282
436.cactusADM	8	402	238	407	235	**402**	**238**	8	402	238	407	235	**402**	**238**
437.leslie3d	8	869	86.4	869	86.4	**869**	**86.4**	4	394	95.6	378	99.6	**387**	**97.2**
444.namd	8	**349**	**184**	352	182	349	184	8	**349**	**184**	349	184	349	184
447.dealII	8	**273**	**335**	270	339	280	326	8	**273**	**335**	270	339	280	326
450.soplex	8	717	92.8	**717**	**92.8**	718	92.8	8	717	92.8	**717**	**92.8**	718	92.8
453.povray	8	147	290	147	290	**147**	**290**	8	122	348	122	348	**122**	**348**
454.calculix	8	**200**	**330**	200	330	199	332	8	**200**	**330**	200	330	199	332
459.GemsFDTD	8	1189	71.2	1191	71.2	**1190**	**71.2**	4	**534**	**79.6**	532	79.6	535	79.2
465.tonto	8	436	181	**435**	**181**	434	182	8	413	190	409	193	**412**	**191**
470.lbm	8	**667**	**165**	667	165	667	165	4	**327**	**168**	327	168	323	170
481.wrf	8	**582**	**154**	583	154	581	154	8	**582**	**154**	583	154	581	154
482.sphinx3	8	**844**	**185**	868	179	660	236	8	**844**	**185**	868	179	660	236

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 16.0 was set up to
generate 64-bit binaries with the command:
"psxevars.bat intel64" (shortcut provided in the Intel(r)
Parallel Studio XE 2016 program folder)
```

Submit Notes

```
Processes were bound to specific processors using the start command with the /affinity switch.
The config file option 'submit' was used to generate the affinity mask for each process.
```

Platform Notes

```
Sysinfo program C:\SPEC16.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on DESKTOP-C8BQEO8 Fri Oct 16 06:53:34 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 10 Pro
OS Version    : 10.0.10240 N/A Build 10240
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 94 Stepping 3 GenuineIntel ~3401 Mhz
BIOS Version  : American Megatrends Inc. 0408, 8/28/2015
Total Physical Memory: 8,084 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 1024
L3CacheSize   : 8192
MaxClockSpeed : 3401
Name          : Intel(R) Core(TM) i7-6700 CPU @ 3.40GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 8

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
450.soplex (base): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxx11_make_pair" src.alt was used.

450.soplex (base): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxx11_make_pair" src.alt was used.

 Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
 + 64GB memory using Windows 8.1 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc12 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG -DSPEC_CPU_BOOST_CONFIG_MSC_VER -DSPEC_NEED_ALGORITHM
450.soplex: -DSPEC_CPU_P64 -DSPEC_GETLINE_TEST
453.povray: -DSPEC_CPU_P64
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

C++ benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc12 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -QxCORE-AVX2 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: -QxCORE-AVX2 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 17 19:18:09 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2015.