SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3500 M5
(Intel Xeon E5-2658 v3, 2.20 GHz)

SPECint®_rate2006 = 992

SPECint_rate_base2006 = 949

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Nov-2015
Hardware Availability: Jan-2015
Software Availability: Sep-2014

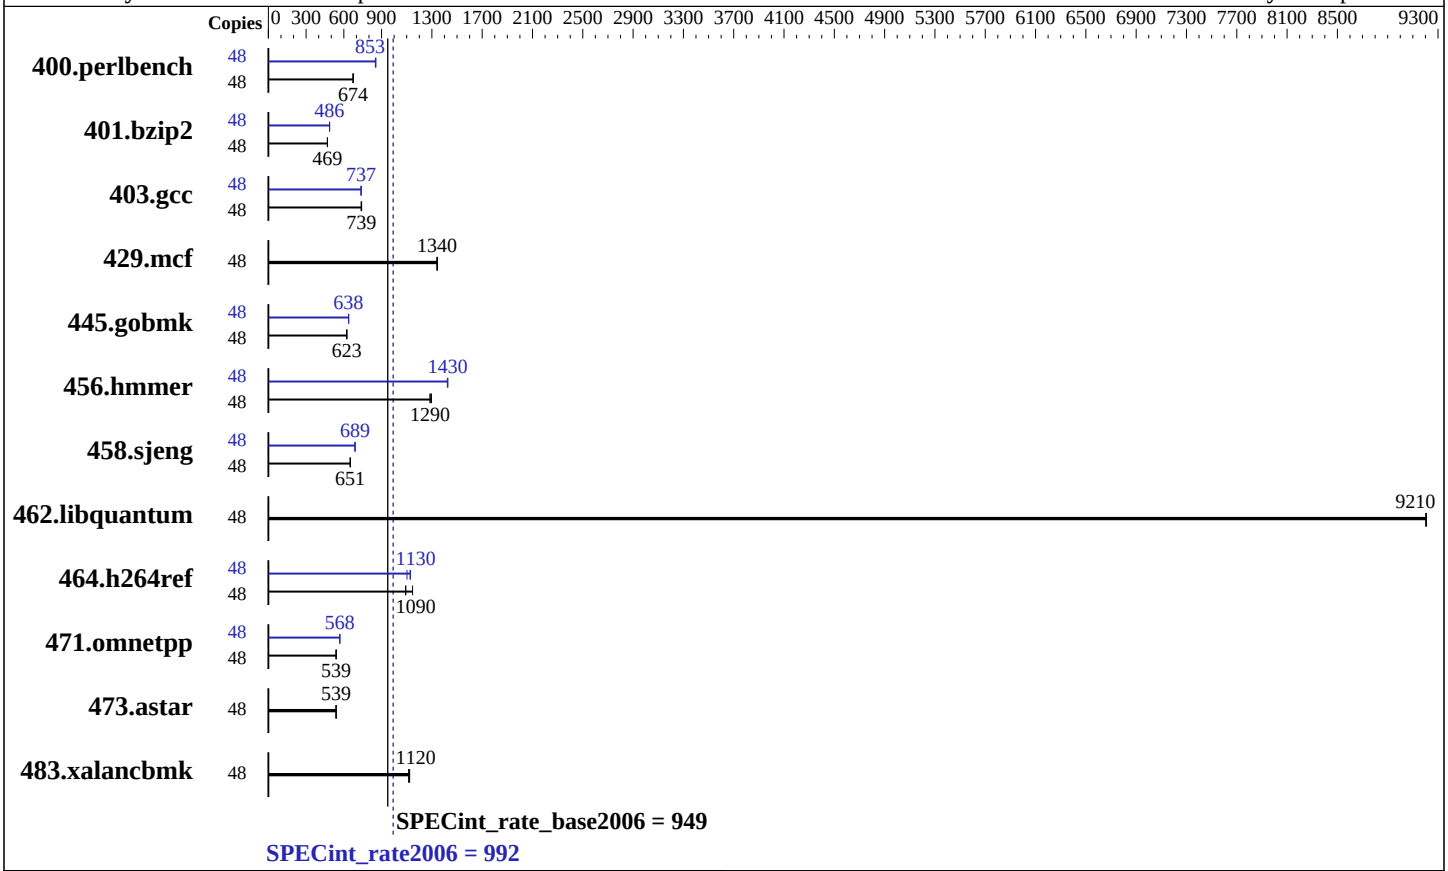

Hardware

CPU Name:	Intel Xeon E5-2658 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 960 GB SATA SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3500 M5
(Intel Xeon E5-2658 v3, 2.20 GHz)

SPECint_rate2006 = 992

SPECint_rate_base2006 = 949

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Nov-2015
Hardware Availability: Jan-2015
Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	696	674	**696**	**674**	696	673	48	**550**	**853**	549	855	551	851
401.bzip2	48	985	470	988	469	**987**	**469**	48	**952**	**486**	953	486	950	487
403.gcc	48	521	742	**523**	**739**	524	738	48	523	739	**524**	**737**	525	736
429.mcf	48	326	1340	**326**	**1340**	327	1340	48	326	1340	**326**	**1340**	327	1340
445.gobmk	48	807	624	**808**	**623**	808	623	48	**789**	**638**	790	638	789	639
456.hmmer	48	**348**	**1290**	348	1290	345	1300	48	314	1430	315	1420	**314**	**1430**
458.sjeng	48	891	652	893	650	**892**	**651**	48	843	689	843	689	**843**	**689**
462.libquantum	48	108	9210	**108**	**9210**	108	9200	48	108	9210	**108**	**9210**	108	9200
464.h264ref	48	**973**	**1090**	926	1150	973	1090	48	**943**	**1130**	964	1100	940	1130
471.omnetpp	48	557	539	557	539	**557**	**539**	48	528	568	529	567	**528**	**568**
473.astar	48	**625**	**539**	625	539	627	538	48	**625**	**539**	625	539	627	538
483.xalancbmk	48	**296**	**1120**	295	1120	297	1120	48	**296**	**1120**	295	1120	297	1120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS setting:
Operating Mode set to "Maximum Performance"
Hyper-threading set to "Enable"
Snoop mode set to "COD"
Sysinfo program /home/SPEC_ic16/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on x3500M5 Mon Nov  9 23:29:52 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2658 v3 @ 2.20GHz
      2 "physical id"s (chips)
      48 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
```

Continued on next page

Platform Notes (Continued)

```
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 6
         siblings  : 12
         physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
         physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
      cache size : 15360 KB

   From /proc/meminfo
      MemTotal:       263453468 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      os-release:
         NAME="Red Hat Enterprise Linux Server"
         VERSION="7.0 (Maipo)"
         ID="rhel"
         ID_LIKE="fedora"
         VERSION_ID="7.0"
         PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
         ANSI_COLOR="0;31"
         CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
      redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
      system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

   uname -a:
      Linux x3500M5 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64
      x86_64 x86_64 GNU/Linux


   SPEC is set to: /home/SPEC_ic16
      Filesystem            Type  Size  Used Avail Use% Mounted on
      /dev/mapper/rhel-root xfs   927G  147G  780G  16% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS IBM -[TAE105J-1.10]- 04/20/2015
     Memory:
      6x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz
      10x Hynix HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz
      8x NO DIMM Unknown

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPEC_ic16/libs/32:/home/SPEC_ic16/libs/64:/home/SPEC_ic16/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64`
458.sjeng: `-D_FILE_OFFSET_BITS=64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1)
`-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2)
`-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 1 17:41:55 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 December 2015.