SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Z97M-PLUS Motherboard (Intel Core i7-5775C)

SPECfp®_rate2006 = 181

SPECfp_rate_base2006 = 175

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2015
Hardware Availability: Jun-2015
Software Availability: Aug-2015

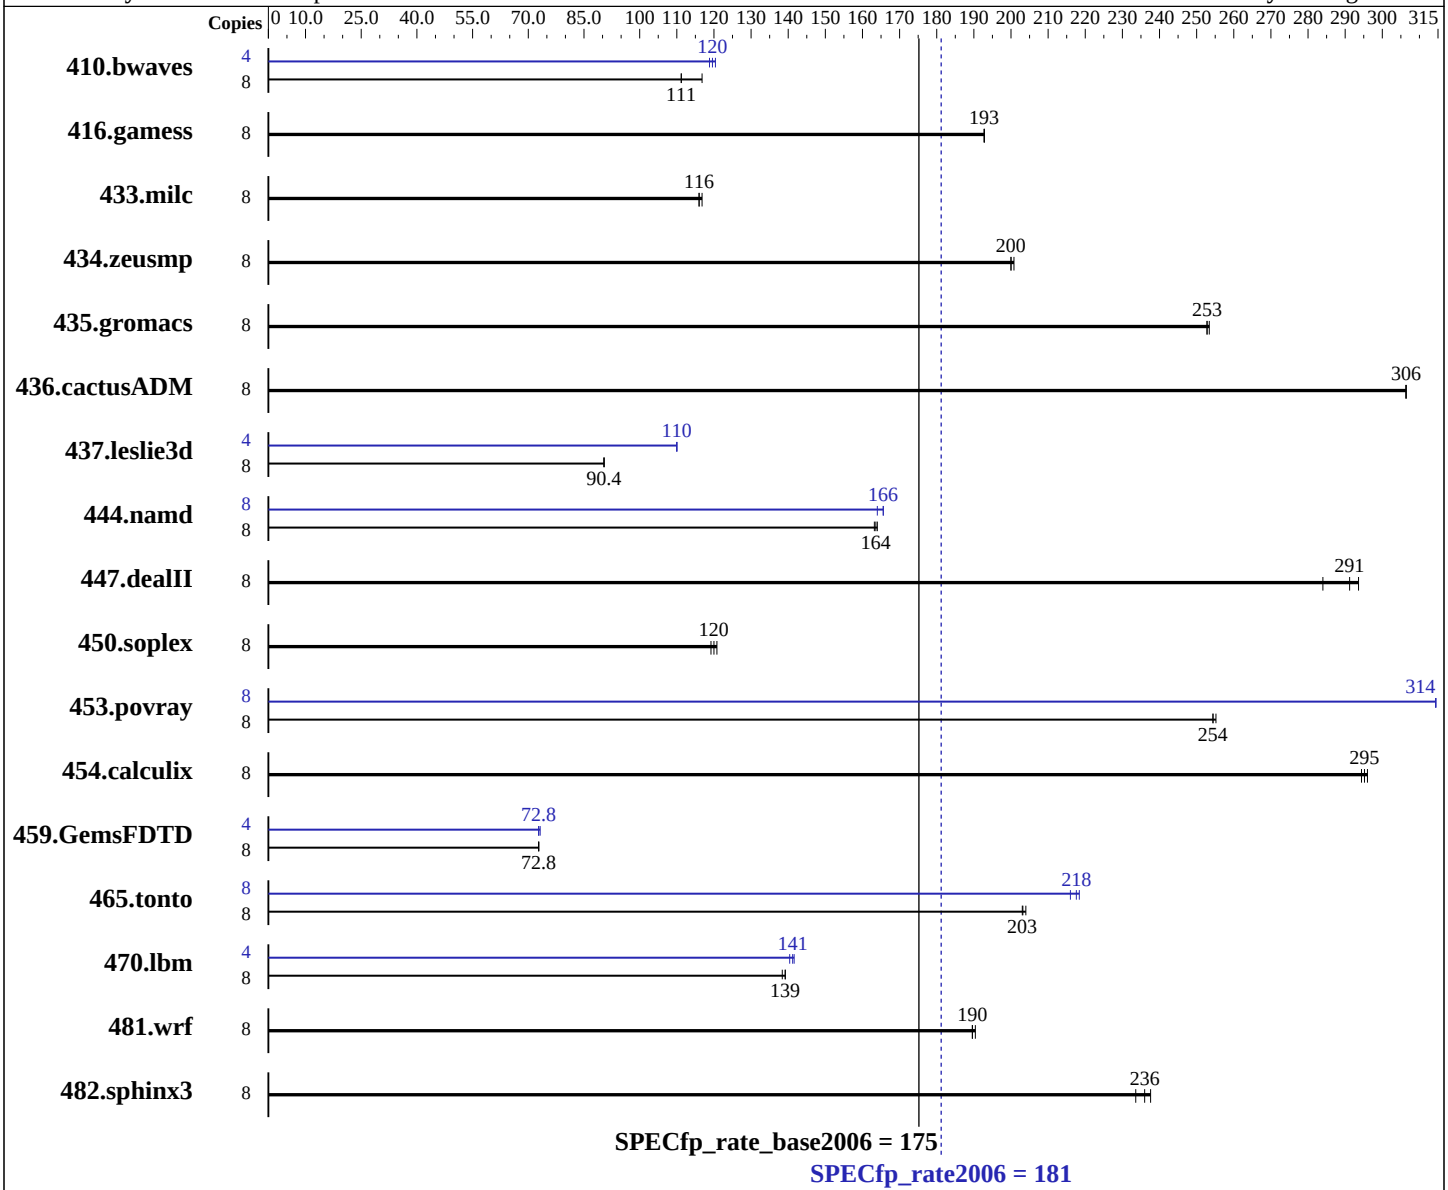

Hardware

CPU Name:	Intel Core i7-5775C
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Microsoft Windows 10 Pro 10.0.10240 N/A Build 10240
Compiler:	C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows; Fortran: Version 16.0.0.110 of Intel Fortran Studio XE for Windows; Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Z97M-PLUS Motherboard (Intel Core i7-5775C)

SPECfp_rate2006 = 181

SPECfp_rate_base2006 = 175

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2015
Hardware Availability: Jun-2015
Software Availability: Aug-2015

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-14900U-10, running at 1600MHz)
Disk Subsystem: 1 TB Seagate SATA HDD, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 11.0 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	934	117	979	111	**975**	**111**	4	451	120	**454**	**120**	458	119
416.gamess	8	811	193	811	193	**811**	**193**	8	811	193	811	193	**811**	**193**
433.milc	8	634	116	631	117	**632**	**116**	8	634	116	631	117	**632**	**116**
434.zeusmp	8	**364**	**200**	363	201	365	200	8	**364**	**200**	363	201	365	200
435.gromacs	8	**226**	**253**	226	253	225	253	8	**226**	**253**	226	253	225	253
436.cactusADM	8	312	306	**312**	**306**	312	306	8	312	306	**312**	**306**	312	306
437.leslie3d	8	832	90.4	**832**	**90.4**	832	90.4	4	341	110	342	110	**342**	**110**
444.namd	8	392	163	392	164	**392**	**164**	8	387	166	390	164	**387**	**166**
447.dealII	8	**314**	**291**	311	294	322	284	8	**314**	**291**	311	294	322	284
450.soplex	8	560	119	**556**	**120**	554	121	8	560	119	**556**	**120**	554	121
453.povray	8	168	254	**167**	**254**	167	255	8	135	314	**135**	**314**	135	314
454.calculix	8	**223**	**295**	224	294	223	296	8	**223**	**295**	224	294	223	296
459.GemsFDTD	8	1171	72.8	**1170**	**72.8**	1166	72.8	4	581	73.2	**582**	**72.8**	583	72.8
465.tonto	8	**388**	**203**	386	204	388	203	8	364	216	360	218	**361**	**218**
470.lbm	8	791	139	796	138	**792**	**139**	4	**389**	**141**	392	140	388	142
481.wrf	8	470	190	472	190	**472**	**190**	8	470	190	472	190	**472**	**190**
482.sphinx3	8	**660**	**236**	657	238	667	234	8	**660**	**236**	657	238	667	234

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 16.0 was set up to
generate 64-bit binaries with the command:
"psxevars.bat intel64" (shortcut provided in the Intel(r)
Parallel Studio XE 2016 program folder)
```

Submit Notes

```
Processes were bound to specific processors using the start command with the /affinity switch.
The config file option 'submit' was used to generate the affinity mask for each process.
```

Platform Notes

```
Sysinfo program C:\SPEC16.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on DESKTOP-K1NMJC0 Wed Oct 14 07:30:46 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 10 Pro
OS Version    : 10.0.10240 N/A Build 10240
System Manufacturer: ASUS
System Model  : All Series
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 71 Stepping 1 GenuineIntel ~3300 Mhz
BIOS Version  : American Megatrends Inc. 2802, 5/19/2015
Total Physical Memory: 8,063 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 1024
L3CacheSize   : 6144
MaxClockSpeed : 3301
Name          : Intel(R) Core(TM) i7-5775C CPU @ 3.30GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 8

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
450.soplex (base): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxx11_make_pair" src.alt was used.

450.soplex (base): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxx11_make_pair" src.alt was used.

 Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
 + 64GB memory using Windows 8.1 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc12 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG -DSPEC_CPU_BOOST_CONFIG_MSC_VER -DSPEC_NEED_ALGORITHM
450.soplex: -DSPEC_CPU_P64 -DSPEC_GETLINE_TEST
453.povray: -DSPEC_CPU_P64
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

C++ benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc12 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -QxCORE-AVX2 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: -QxCORE-AVX2 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 1 17:42:31 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 December 2015.