# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Sugon

## Sugon I840-G20 (Intel Xeon E7-8890 v3)

SPECfp®2006 = 98.9

SPECfp_base2006 = 93.6

**CPU2006 license:** 9046
**Test sponsor:** Sugon
**Tested by:** Sugon

**Test date:** Nov-2015
**Hardware Availability:** Sep-2015
**Software Availability:** Sep-2015

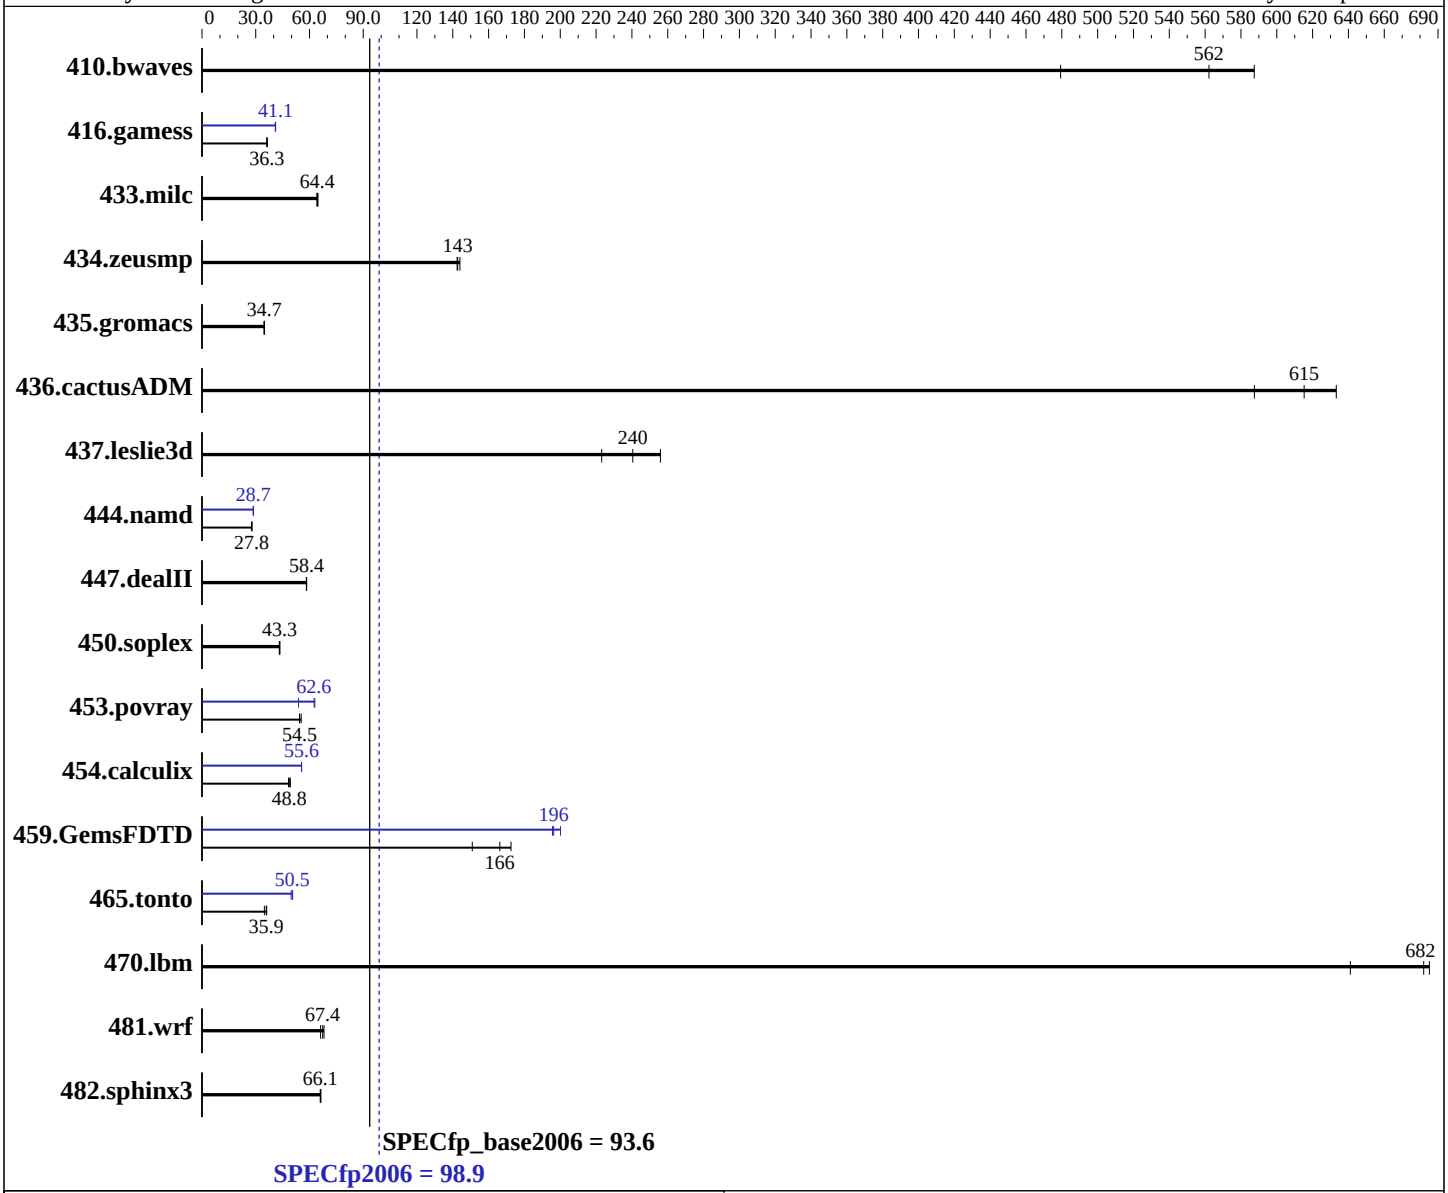


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E7-8890 v3 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.30 GHz |
| CPU MHz: | 2500 |
| FPU: | Integrated |
| CPU(s) enabled: | 72 cores, 4 chips, 18 cores/chip |
| CPU(s) orderable: | 2,4 chip |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |

Continued on next page

### Software

| | |
|---|---|
| Operating System: | SUSE Linux Enterprise Server 12 (x86_64) 3.12.28-4-default |
| Compiler: | C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux |
| Auto Parallel: | Yes |
| File System: | ext4 |
| System State: | Run level 3 (multi-user) |

Continued on next page

# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Sugon

## Sugon I840-G20 (Intel Xeon E7-8890 v3)

SPECfp2006 = 98.9

SPECfp_base2006 = 93.6

**CPU2006 license:** 9046
**Test sponsor:** Sugon
**Tested by:** Sugon

**Test date:** Nov-2015
**Hardware Availability:** Sep-2015
**Software Availability:** Sep-2015

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 4 x 250 GB SATA, RAID10
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

## Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | **24.2** | **562** | 23.1 | 587 | 28.4 | 479 | **24.2** | **562** | 23.1 | 587 | 28.4 | 479 |
| 416.gamess | **539** | **36.3** | 540 | 36.2 | 538 | 36.4 | 479 | 40.9 | 476 | 41.1 | **477** | **41.1** |
| 433.milc | **142** | **64.4** | 143 | 64.1 | 142 | 64.8 | **142** | **64.4** | 143 | 64.1 | 142 | 64.8 |
| 434.zeusmp | 63.9 | 142 | 63.2 | 144 | **63.7** | **143** | 63.9 | 142 | 63.2 | 144 | **63.7** | **143** |
| 435.gromacs | 206 | 34.7 | 205 | 34.9 | **206** | **34.7** | 206 | 34.7 | 205 | 34.9 | **206** | **34.7** |
| 436.cactusADM | **19.4** | **615** | 18.9 | 633 | 20.3 | 587 | **19.4** | **615** | 18.9 | 633 | 20.3 | 587 |
| 437.leslie3d | 36.7 | 256 | 42.1 | 223 | **39.1** | **240** | 36.7 | 256 | 42.1 | 223 | **39.1** | **240** |
| 444.namd | 288 | 27.9 | 289 | 27.8 | **289** | **27.8** | 281 | 28.6 | 279 | 28.7 | **279** | **28.7** |
| 447.dealII | **196** | **58.4** | 196 | 58.3 | 196 | 58.4 | **196** | **58.4** | 196 | 58.3 | 196 | 58.4 |
| 450.soplex | 193 | 43.2 | **193** | **43.3** | 192 | 43.5 | 193 | 43.2 | **193** | **43.3** | 192 | 43.5 |
| 453.povray | **97.6** | **54.5** | 97.8 | 54.4 | 96.1 | 55.4 | 84.5 | 63.0 | **85.0** | **62.6** | 98.7 | 53.9 |
| 454.calculix | 167 | 49.3 | 171 | 48.3 | **169** | **48.8** | **148** | **55.6** | 149 | 55.5 | 148 | 55.6 |
| 459.GemsFDTD | 70.3 | 151 | 61.5 | 173 | **63.8** | **166** | **54.0** | **196** | 53.0 | 200 | 54.2 | 196 |
| 465.tonto | 273 | 36.1 | **274** | **35.9** | 283 | 34.8 | **195** | **50.5** | 194 | 50.6 | 198 | 49.8 |
| 470.lbm | **20.1** | **682** | 21.4 | 641 | 20.1 | 685 | **20.1** | **682** | 21.4 | 641 | 20.1 | 685 |
| 481.wrf | 169 | 66.2 | 164 | 68.1 | **166** | **67.4** | 169 | 66.2 | 164 | 68.1 | **166** | **67.4** |
| 482.sphinx3 | 295 | 66.1 | 294 | 66.4 | **295** | **66.1** | 295 | 66.1 | 294 | 66.4 | **295** | **66.1** |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Platform Notes

```
  BIOS configuration:
  Set Power Technology to Custom
  Set Package C State limit C0/C1 state
  Set DDR speed to 1600 MHz
  Set Hyper-Threading to Disabled
  Baseboard Management Controller used to adjust the fan speed to performance mode
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost Thu Nov 26 09:58:25 2015
```

Continued on next page

## Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
      4 "physical id"s (chips)
      72 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 18
      siblings  : 18
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
   cache size : 46080 KB

From /proc/meminfo
   MemTotal:       529311968 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 0
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12"
      VERSION_ID="12"
      PRETTY_NAME="SUSE Linux Enterprise Server 12"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
   Linux localhost 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
   (9879bd4) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 26 09:43

SPEC is set to: /home/cpu2006
```

Continued on next page

## Platform Notes (Continued)

```
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda3      ext4  875G  300G  574G  35% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. 1.01 08/26/2015
    Memory:
     32x Hynix HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1600 MHz
     16x NO DIMM NO DIMM

  (End of data from sysinfo program)
```

## General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
OMP_NUM_THREADS = "72"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

## Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64

Continued on next page

## Base Portability Flags (Continued)

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

## Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc

Continued on next page

## Peak Optimization Flags (Continued)

465.tonto (continued):
`-opt-malloc-options=3 -auto -unroll4`

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revB.xml`


SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 15 16:46:13 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 December 2015.