SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECint®_rate2006 = 1290

SPECint_rate_base2006 = 1240

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Nov-2015
Hardware Availability: Sep-2014
Software Availability: Aug-2015

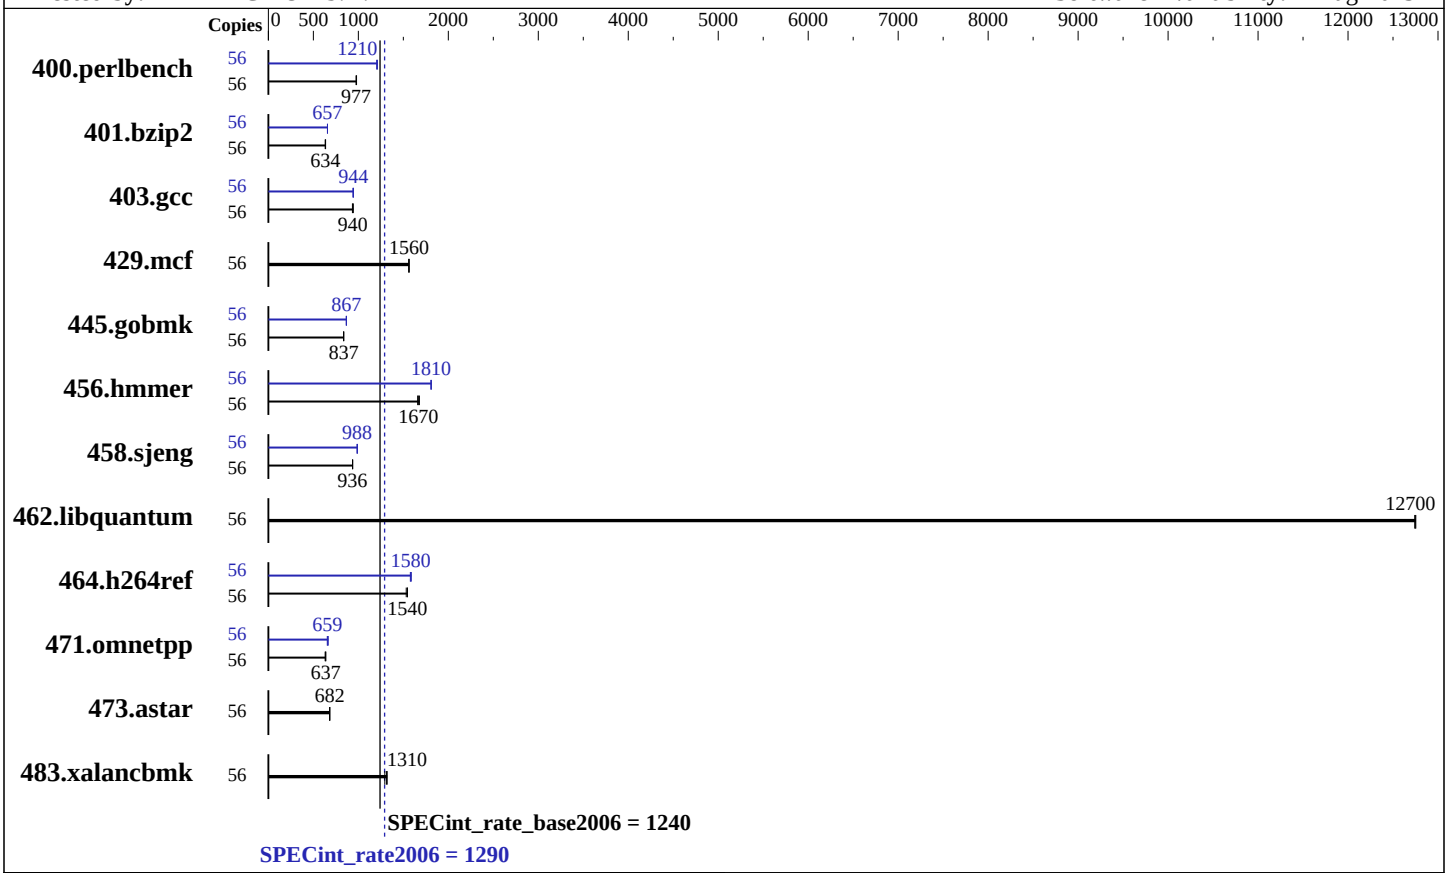

Hardware

CPU Name:	Intel Xeon E5-2697 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	35 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400P-R, running at 2133 MHz)
Disk Subsystem:	1 x 240 GB SATA II SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.1 (Maipo) 3.10.0-229.11.1.el7.x86_64
Compiler:	C/C++: Version 16.0.0.047 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECint_rate2006 = 1290

SPECint_rate_base2006 = 1240

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Nov-2015
Hardware Availability: Sep-2014
Software Availability: Aug-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	**560**	**977**	558	980	561	975	56	**453**	**1210**	452	1210	454	1200
401.bzip2	56	850	636	855	632	**853**	**634**	56	**823**	**657**	822	657	823	657
403.gcc	56	483	934	478	943	**480**	**940**	56	**477**	**944**	477	945	480	940
429.mcf	56	**327**	**1560**	327	1560	327	1560	56	**327**	**1560**	327	1560	327	1560
445.gobmk	56	701	837	703	836	**702**	**837**	56	677	868	**677**	**867**	679	866
456.hmmer	56	**313**	**1670**	311	1680	315	1660	56	289	1810	289	1810	**289**	**1810**
458.sjeng	56	724	936	724	936	**724**	**936**	56	686	988	686	987	**686**	**988**
462.libquantum	56	91.1	12700	91.0	12800	**91.0**	**12700**	56	91.1	12700	91.0	12800	**91.0**	**12700**
464.h264ref	56	802	1550	809	1530	**802**	**1540**	56	**783**	**1580**	780	1590	785	1580
471.omnetpp	56	**549**	**637**	555	631	549	637	56	535	655	**531**	**659**	526	665
473.astar	56	577	681	**577**	**682**	576	682	56	577	681	**577**	**682**	576	682
483.xalancbmk	56	**294**	**1310**	299	1290	293	1320	56	**294**	**1310**	299	1290	293	1320

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Bios Settings
Hyper-Threading (All) = Enable
Power Technology = Energy Efficient
Enforce POR = Disabled
Memory Frequency = 2133
COD Enable = Enable

BMC Setting
Fan Mode = Full Speed

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on SUT Mon Nov 23 13:32:29 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2697 v3 @ 2.60GHz
          2 "physical id"s (chips)
          56 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 14
          siblings  : 28
          physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
          physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
       cache size : 17920 KB

    From /proc/meminfo
       MemTotal:       263863688 kB
       HugePages_Total:       1
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       os-release:
          NAME="Red Hat Enterprise Linux Server"
          VERSION="7.0 (Maipo)"
          ID="rhel"
          ID_LIKE="fedora"
          VERSION_ID="7.0"
          PRETTY_NAME="Red Hat Enterprise Linux"
          ANSI_COLOR="0;31"
          CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
       os-release.rpmnew:
          NAME="Red Hat Enterprise Linux Server"
          VERSION="7.1 (Maipo)"
          ID="rhel"
          ID_LIKE="fedora"
          VERSION_ID="7.1"
          PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
          ANSI_COLOR="0;31"
          CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
       redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
       system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

    uname -a:
       Linux SUT 3.10.0-229.11.1.el7.x86_64 #5 SMP Mon Sep 14 17:11:19 CEST 2015
       x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Nov 18 09:33

    SPEC is set to: /cpu2006.1.2
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda1      ext4  212G   37G  165G  19% /
```

Continued on next page

Platform Notes (Continued)

```
 Additional information from dmidecode:
   BIOS American Megatrends Inc. 1.1 08/13/2015
   Memory:
    16x   16 GB
    16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2133 MHz 2 rank

 (End of data from sysinfo program)
 dmidecode does not properly detect memory modules
 16 modules of 16 GB were used to run the test (256 GB total)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory
 using RedHat EL 7.1
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/lib/ia32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/lib/ia32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 15 16:46:28 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 December 2015.