SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019S-M
(X11SSH-F , Intel Xeon E3-1240L v5)

SPECfp®2006 = 87.4

SPECfp_base2006 = 85.2

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Dec-2015
Hardware Availability: Oct-2015
Software Availability: Sep-2015

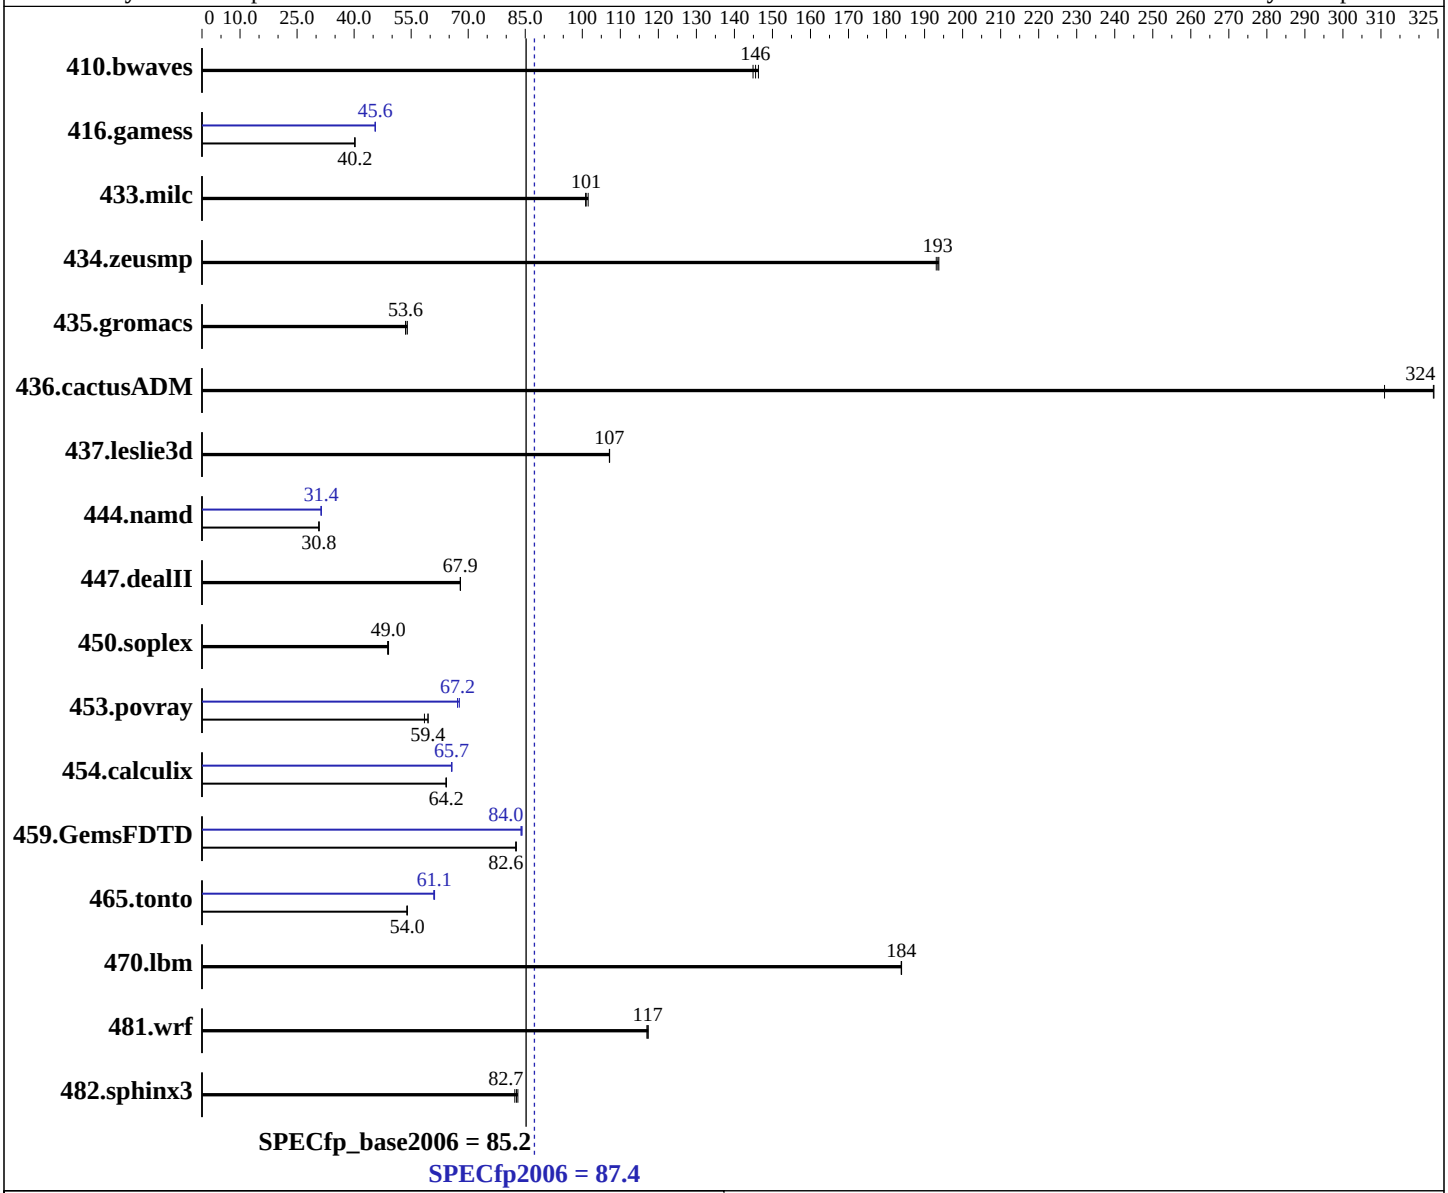

Hardware

CPU Name:	Intel Xeon E3-1240L v5
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 Kernel 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019S-M
(X11SSH-F , Intel Xeon E3-1240L v5)

SPECfp2006 = 87.4

SPECfp_base2006 = 85.2

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Dec-2015
Hardware Availability: Oct-2015
Software Availability: Sep-2015

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (2 x 8 GB 2Rx8 PC4-2133P-U)
Disk Subsystem: 1 x 400 GB SATA III SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	93.8	145	**93.4**	**146**	92.9	146	93.8	145	**93.4**	**146**	92.9	146
416.gamess	**487**	**40.2**	487	40.2	487	40.2	430	45.6	**430**	**45.6**	430	45.5
433.milc	**90.9**	**101**	90.4	102	91.0	101	**90.9**	**101**	90.4	102	91.0	101
434.zeusmp	47.1	193	**47.0**	**193**	47.0	194	47.1	193	**47.0**	**193**	47.0	194
435.gromacs	132	54.0	**133**	**53.6**	133	53.5	132	54.0	**133**	**53.6**	133	53.5
436.cactusADM	**36.9**	**324**	36.9	324	38.4	311	**36.9**	**324**	36.9	324	38.4	311
437.leslie3d	87.7	107	87.7	107	**87.7**	**107**	87.7	107	87.7	107	**87.7**	**107**
444.namd	**261**	**30.8**	260	30.8	261	30.7	256	31.4	256	31.3	**256**	**31.4**
447.dealII	**168**	**67.9**	168	67.9	168	68.0	**168**	**67.9**	168	67.9	168	68.0
450.soplex	**170**	**49.0**	170	49.1	171	48.8	**170**	**49.0**	170	49.1	171	48.8
453.povray	**89.5**	**59.4**	91.0	58.5	89.5	59.4	78.6	67.7	79.2	67.2	**79.1**	**67.2**
454.calculix	**128**	**64.2**	128	64.3	129	64.2	126	65.7	**126**	**65.7**	126	65.6
459.GemsFDTD	128	82.7	129	82.5	**129**	**82.6**	126	83.9	**126**	**84.0**	126	84.2
465.tonto	182	54.0	**182**	**54.0**	183	53.9	161	61.2	161	60.9	**161**	**61.1**
470.lbm	74.7	184	74.7	184	**74.7**	**184**	74.7	184	74.7	184	**74.7**	**184**
481.wrf	95.5	117	95.2	117	**95.3**	**117**	95.5	117	95.2	117	**95.3**	**117**
482.sphinx3	237	82.3	**236**	**82.7**	235	83.1	237	82.3	**236**	**82.7**	235	83.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Hyper-threading = Disabled
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Dec 11 12:23:06 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo
```

Continued on next page

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E3-1240L v5 @ 2.10GHz
      1 "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 4
      physical 0: cores 0 1 2 3
   cache size : 8192 KB

From /proc/meminfo
   MemTotal:       16088752 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
   EDT 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 11 07:29

SPEC is set to: /home/cpu2006
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-root xfs   280G   26G  254G  10% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS American Megatrends Inc. 1.0a 11/13/2015
  Memory:
   2x Micron 16ATF1G64AZ-2G1A2 8 GB 2 rank 2133 MHz
   2x Not Specified Not Specified
```

Continued on next page

Platform Notes (Continued)

```
(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
OMP_NUM_THREADS = "4"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page

Base Portability Flags (Continued)

482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 30 19:58:11 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 December 2015.