SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M2, Intel Xeon E3-1240L v5, 2.10 GHz

SPECint®_rate2006 = 206

SPECint_rate_base2006 = 198

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Nov-2015
Hardware Availability: Feb-2016
Software Availability: Sep-2015

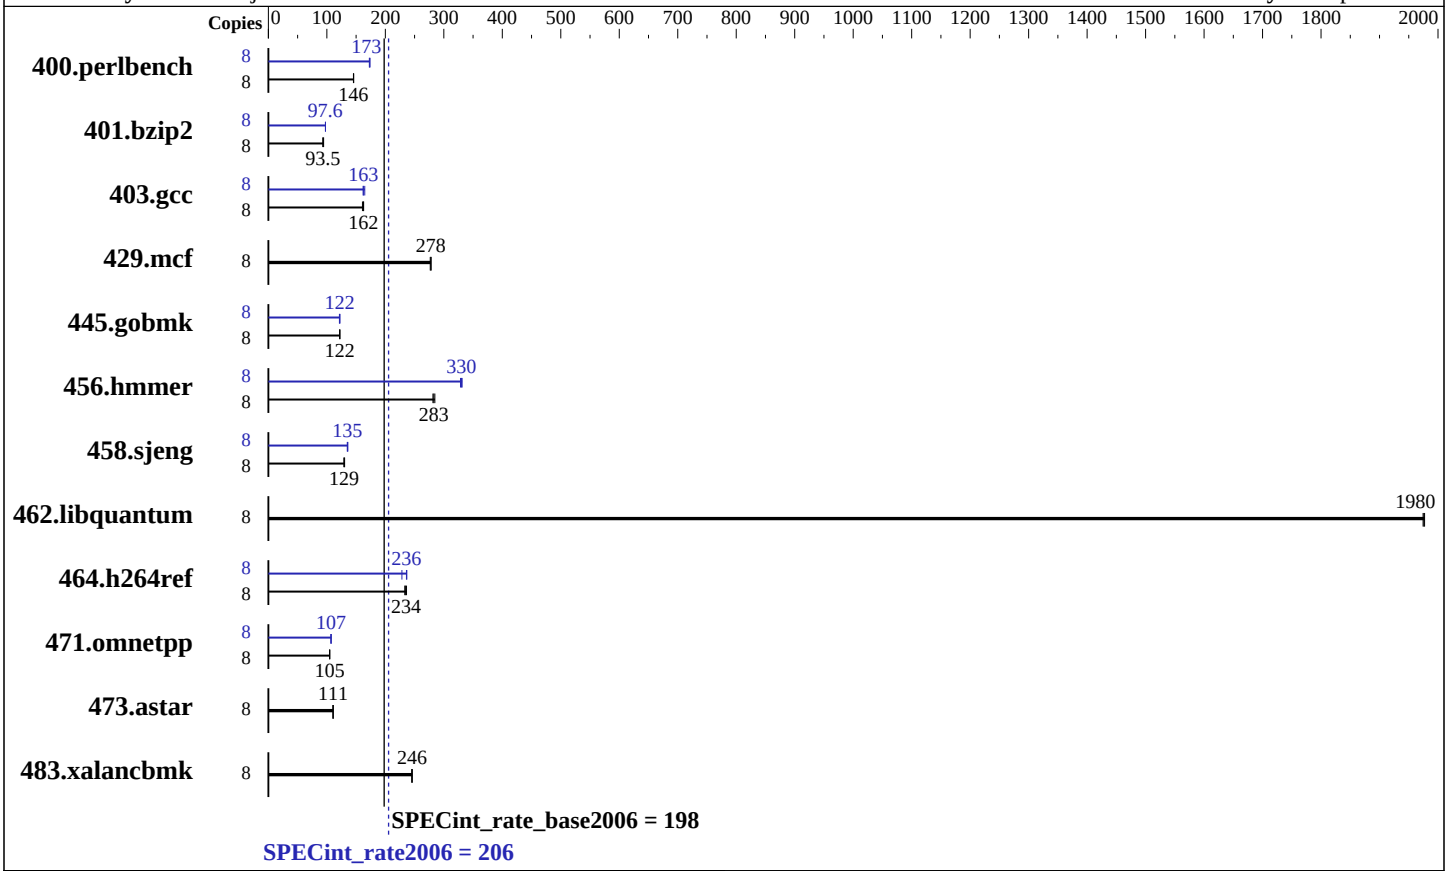

Hardware

CPU Name:	Intel Xeon E3-1240L v5
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)
Disk Subsystem:	1 x SATA, 500 GB, 7200 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) Kernel 3.12.48-52.27-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M2, Intel Xeon E3-1240L v5, 2.10 GHz

SPECint_rate2006 = 206

SPECint_rate_base2006 = 198

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Nov-2015
Hardware Availability: Feb-2016
Software Availability: Sep-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	536	146	537	145	**537**	**146**	8	450	174	**451**	**173**	453	173
401.bzip2	8	**825**	**93.5**	829	93.1	817	94.5	8	791	97.6	**791**	**97.6**	791	97.6
403.gcc	8	**396**	**162**	400	161	395	163	8	391	165	**396**	**163**	398	162
429.mcf	8	262	278	**262**	**278**	264	277	8	262	278	**262**	**278**	264	277
445.gobmk	8	688	122	687	122	**687**	**122**	8	691	121	**688**	**122**	686	122
456.hmmer	8	262	285	265	281	**264**	**283**	8	227	329	**226**	**330**	225	331
458.sjeng	8	**748**	**129**	743	130	748	129	8	**715**	**135**	718	135	713	136
462.libquantum	8	84.0	1970	**83.9**	**1980**	83.8	1980	8	84.0	1970	**83.9**	**1980**	83.8	1980
464.h264ref	8	749	236	759	233	**756**	**234**	8	748	237	**750**	**236**	775	228
471.omnetpp	8	477	105	477	105	**477**	**105**	8	**466**	**107**	466	107	467	107
473.astar	8	508	110	507	111	**507**	**111**	8	508	110	507	111	**507**	**111**
483.xalancbmk	8	224	246	225	245	**225**	**246**	8	224	246	225	245	**225**	**246**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Sysinfo program /home/SPECcpu2006-RH72-ICC16-update/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on TX1320M2 Fri Nov 13 23:00:54 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E3-1240L v5 @ 2.10GHz
      1 "physical id"s (chips)
      8 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
```

Continued on next page

Platform Notes (Continued)

```
        siblings  : 8
        physical 0: cores 0 1 2 3
     cache size : 8192 KB

  From /proc/meminfo
     MemTotal:       65906076 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 0
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12"
        VERSION_ID="12"
        PRETTY_NAME="SUSE Linux Enterprise Server 12"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12"

  uname -a:
     Linux TX1320M2 3.12.48-52.27-default #1 SMP Mon Oct 5 10:08:10 UTC 2015
     (314f0e3) x86_64 x86_64 x86_64 GNU/Linux

  run-level 5 Nov 13 13:10

  SPEC is set to: /home/SPECcpu2006-RH72-ICC16-update
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda3      xfs   1.6T  3.9G  1.6T   1% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.1.0 for D3373-A1x
    10/30/2015
    Memory:
     4x SK Hynix HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu2006-RH72-ICC16-update/libs/32:/home/SPECcpu2006-RH72-ICC16-update/libs/64:/home/SPECcpu2006-RH72-ICC16-update/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled

 For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:
```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64`
458.sjeng: `-D_FILE_OFFSET_BITS=64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1)
`-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2)
`-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 30 19:58:49 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 December 2015.