



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4048B-TR4FT  
(X10QBI , Intel Xeon E7-4830 v3)

**SPECint\_rate2006 = 1750**

**SPECint\_rate\_base2006 = 1680**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

**Test date:** Nov-2015

**Hardware Availability:** Sep-2015

**Software Availability:** Oct-2014

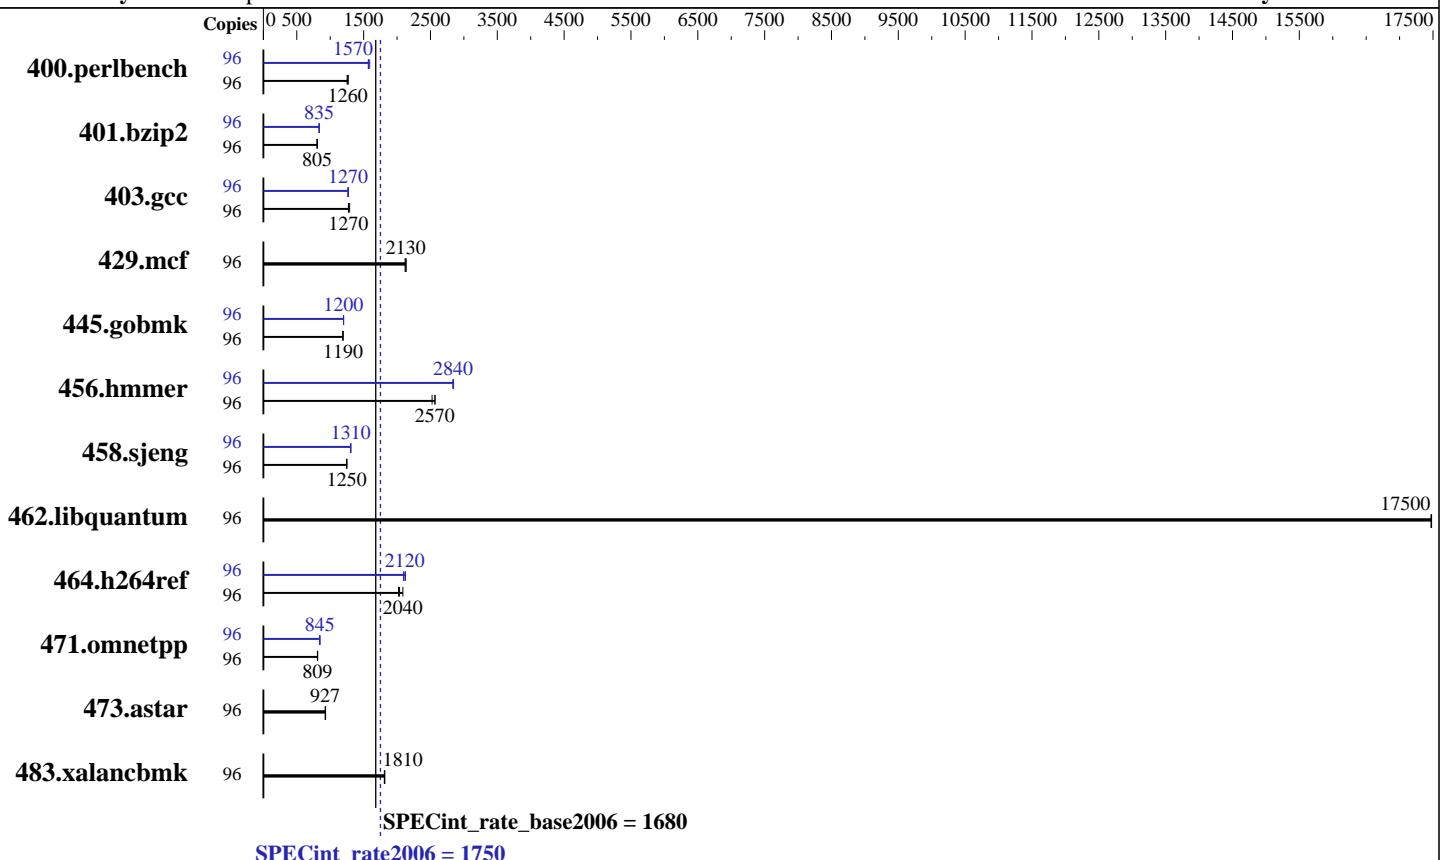

### Hardware

CPU Name: Intel Xeon E7-4830 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)  
Disk Subsystem: 1 x 750 GB SATA III, 7200 RPM  
Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12, Kernel 3.12.28-4-default  
Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4048B-TR4FT  
(X10QBI , Intel Xeon E7-4830 v3)

**SPECint\_rate2006 = 1750**

**SPECint\_rate\_base2006 = 1680**

CPU2006 license: 001176

Test date: Nov-2015

Test sponsor: Supermicro

Hardware Availability: Sep-2015

Tested by: Supermicro

Software Availability: Oct-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	96	749	1250	<b>743</b>	<b>1260</b>	739	1270	96	597	1570	<b>597</b>	<b>1570</b>	590	1590
401.bzip2	96	<b>1151</b>	<b>805</b>	1150	805	1152	804	96	1109	835	1111	834	<b>1109</b>	<b>835</b>
403.gcc	96	607	1270	<b>606</b>	<b>1270</b>	599	1290	96	608	1270	612	1260	<b>609</b>	<b>1270</b>
429.mcf	96	410	2140	<b>411</b>	<b>2130</b>	413	2120	96	410	2140	<b>411</b>	<b>2130</b>	413	2120
445.gobmk	96	<b>845</b>	<b>1190</b>	845	1190	846	1190	96	840	1200	<b>839</b>	<b>1200</b>	839	1200
456.hammer	96	355	2520	<b>349</b>	<b>2570</b>	349	2570	96	<b>315</b>	<b>2840</b>	315	2850	316	2830
458.sjeng	96	<b>931</b>	<b>1250</b>	931	1250	932	1250	96	888	1310	889	1310	<b>888</b>	<b>1310</b>
462.libquantum	96	114	17500	<b>114</b>	<b>17500</b>	114	17500	96	114	17500	<b>114</b>	<b>17500</b>	114	17500
464.h264ref	96	1051	2020	1018	2090	<b>1043</b>	<b>2040</b>	96	999	2130	<b>1003</b>	<b>2120</b>	1013	2100
471.omnetpp	96	<b>741</b>	<b>809</b>	742	809	738	813	96	<b>710</b>	<b>845</b>	708	848	715	839
473.astar	96	728	926	<b>727</b>	<b>927</b>	724	931	96	728	926	<b>727</b>	<b>927</b>	724	931
483.xalancbmk	96	365	1820	366	1810	<b>365</b>	<b>1810</b>	96	365	1820	366	1810	<b>365</b>	<b>1810</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Power Technology = Custom

C-State = C0/C1

Demand Scrub = Disabled

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on 126-37 Sat Nov 7 02:03:45 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-4830 v3 @ 2.10GHz

4 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4048B-TR4FT  
(X10QBI , Intel Xeon E7-4830 v3)

**SPECint\_rate2006 = 1750**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Nov-2015

**Hardware Availability:** Sep-2015

**Software Availability:** Oct-2014

## Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
siblings   : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      1058840408 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux 126-37 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014 (9879bd4)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 7 02:02
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  591G  308G  282G  53% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0 10/27/2015  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4048B-TR4FT  
(X10QBI , Intel Xeon E7-4830 v3)

**SPECint\_rate2006 = 1750**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Nov-2015

**Hardware Availability:** Sep-2015

**Software Availability:** Oct-2014

## Platform Notes (Continued)

### Memory:

64x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1333 MHz  
32x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

### C benchmarks:

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

### C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

### C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

### C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4048B-TR4FT  
(X10QBI , Intel Xeon E7-4830 v3)

**SPECint\_rate2006 = 1750**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Nov-2015

**Hardware Availability:** Sep-2015

**Software Availability:** Oct-2014

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4048B-TR4FT  
(X10QBI , Intel Xeon E7-4830 v3)

**SPECint\_rate2006 = 1750**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Nov-2015

**Hardware Availability:** Sep-2015

**Software Availability:** Oct-2014

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hummer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Supermicro**

SuperServer 4048B-TR4FT  
(X10QBI , Intel Xeon E7-4830 v3)

**SPECint\_rate2006 = 1750**

**SPECint\_rate\_base2006 = 1680**

**CPU2006 license:** 001176

**Test date:** Nov-2015

**Test sponsor:** Supermicro

**Hardware Availability:** Sep-2015

**Tested by:** Supermicro

**Software Availability:** Oct-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jan 14 16:22:55 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 January 2016.