



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-WR  
(X11SSW-F, Intel Xeon E3-1220 v5)

SPECint®\_rate2006 = 198

SPECint\_rate\_base2006 = 193

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Mar-2015

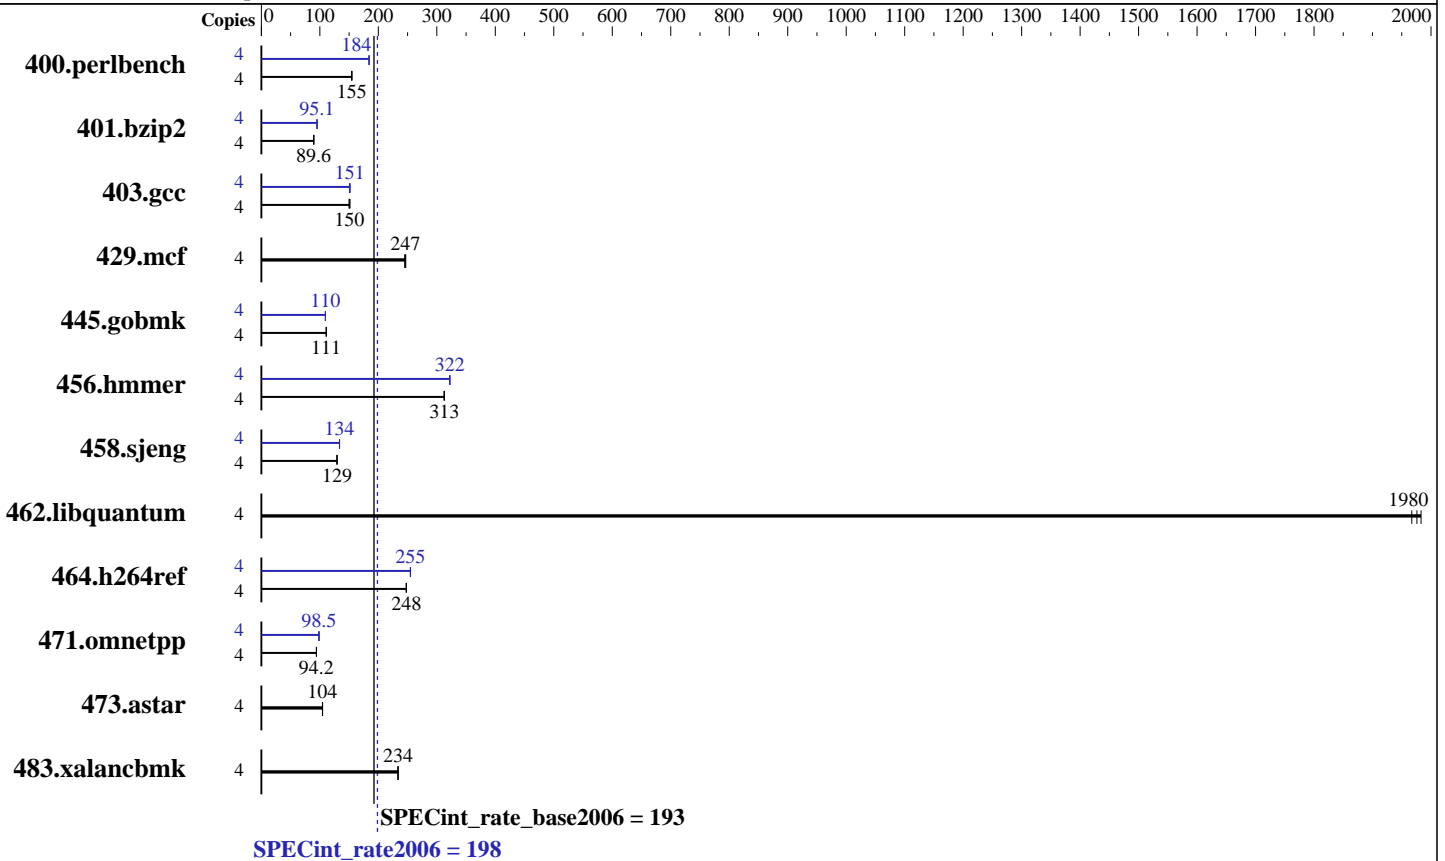

### Hardware

CPU Name: Intel Xeon E3-1220 v5  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)  
 Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-WR  
(X11SSW-F, Intel Xeon E3-1220 v5)

SPECint\_rate2006 = 198

SPECint\_rate\_base2006 = 193

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2016  
Hardware Availability: Oct-2015  
Software Availability: Mar-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	252	155	253	154	<u>253</u>	<u>155</u>	4	212	184	212	184	<u>212</u>	<u>184</u>
401.bzip2	4	<u>431</u>	<u>89.6</u>	430	89.7	432	89.4	4	406	95.0	404	95.5	<u>406</u>	<u>95.1</u>
403.gcc	4	215	150	<u>214</u>	<u>150</u>	212	152	4	212	152	214	151	<u>213</u>	<u>151</u>
429.mcf	4	149	245	148	247	<u>148</u>	<u>247</u>	4	149	245	148	247	<u>148</u>	<u>247</u>
445.gobmk	4	378	111	378	111	<u>378</u>	<u>111</u>	4	<u>383</u>	<u>110</u>	383	110	383	109
456.hammer	4	119	312	<u>119</u>	<u>313</u>	119	313	4	116	322	<u>116</u>	<u>322</u>	116	322
458.sjeng	4	374	129	<u>374</u>	<u>129</u>	374	129	4	<u>362</u>	<u>134</u>	363	133	362	134
462.libquantum	4	42.1	1970	41.8	1980	<u>41.9</u>	<u>1980</u>	4	42.1	1970	41.8	1980	<u>41.9</u>	<u>1980</u>
464.h264ref	4	357	248	357	248	<u>357</u>	<u>248</u>	4	348	255	<u>347</u>	<u>255</u>	347	255
471.omnetpp	4	265	94.2	<u>265</u>	<u>94.2</u>	266	94.0	4	254	98.6	254	98.4	<u>254</u>	<u>98.5</u>
473.astar	4	268	105	269	104	<u>269</u>	<u>104</u>	4	268	105	269	104	<u>269</u>	<u>104</u>
483.xalancbmk	4	118	234	<u>118</u>	<u>234</u>	118	234	4	118	234	<u>118</u>	<u>234</u>	118	234

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Thu Jan 7 12:08:51 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1220 v5 @ 3.00GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 4
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-WR  
(X11SSW-F, Intel Xeon E3-1220 v5)

SPECint\_rate2006 = 198

SPECint\_rate\_base2006 = 193

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Jan-2016  
**Hardware Availability:** Oct-2015  
**Software Availability:** Mar-2015

### Platform Notes (Continued)

physical 0: cores 0 1 2 3  
cache size : 8192 KB

```
From /proc/meminfo
MemTotal:      65630872 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 7 02:57

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  865G  170G  696G  20% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0a 12/29/2015  
Memory:  
4x Samsung M391A2K43BB1-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-WR  
(X11SSW-F, Intel Xeon E3-1220 v5)

SPECint\_rate2006 = 198

SPECint\_rate\_base2006 = 193

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2016  
Hardware Availability: Oct-2015  
Software Availability: Mar-2015

## General Notes (Continued)

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:  
icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32  
C++ benchmarks:  
icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3  
C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32  
400.perlbench: icc -m64  
401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-WR  
(X11SSW-F, Intel Xeon E3-1220 v5)

SPECint\_rate2006 = 198

SPECint\_rate\_base2006 = 193

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2016  
Hardware Availability: Oct-2015  
Software Availability: Mar-2015

## Peak Compiler Invocation (Continued)

456.hmmr: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmr: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3`

456.hmmr: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-WR  
(X11SSW-F, Intel Xeon E3-1220 v5)

SPECint\_rate2006 = 198

SPECint\_rate\_base2006 = 193

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2016  
Hardware Availability: Oct-2015  
Software Availability: Mar-2015

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 26 15:12:21 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 January 2016.