SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5029S-TN2
(X11SSV-Q , Intel Pentium G4400)

SPECint®_rate2006 = 99.4

SPECint_rate_base2006 = 96.4

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Dec-2015
Hardware Availability: Sep-2015
Software Availability: Sep-2015

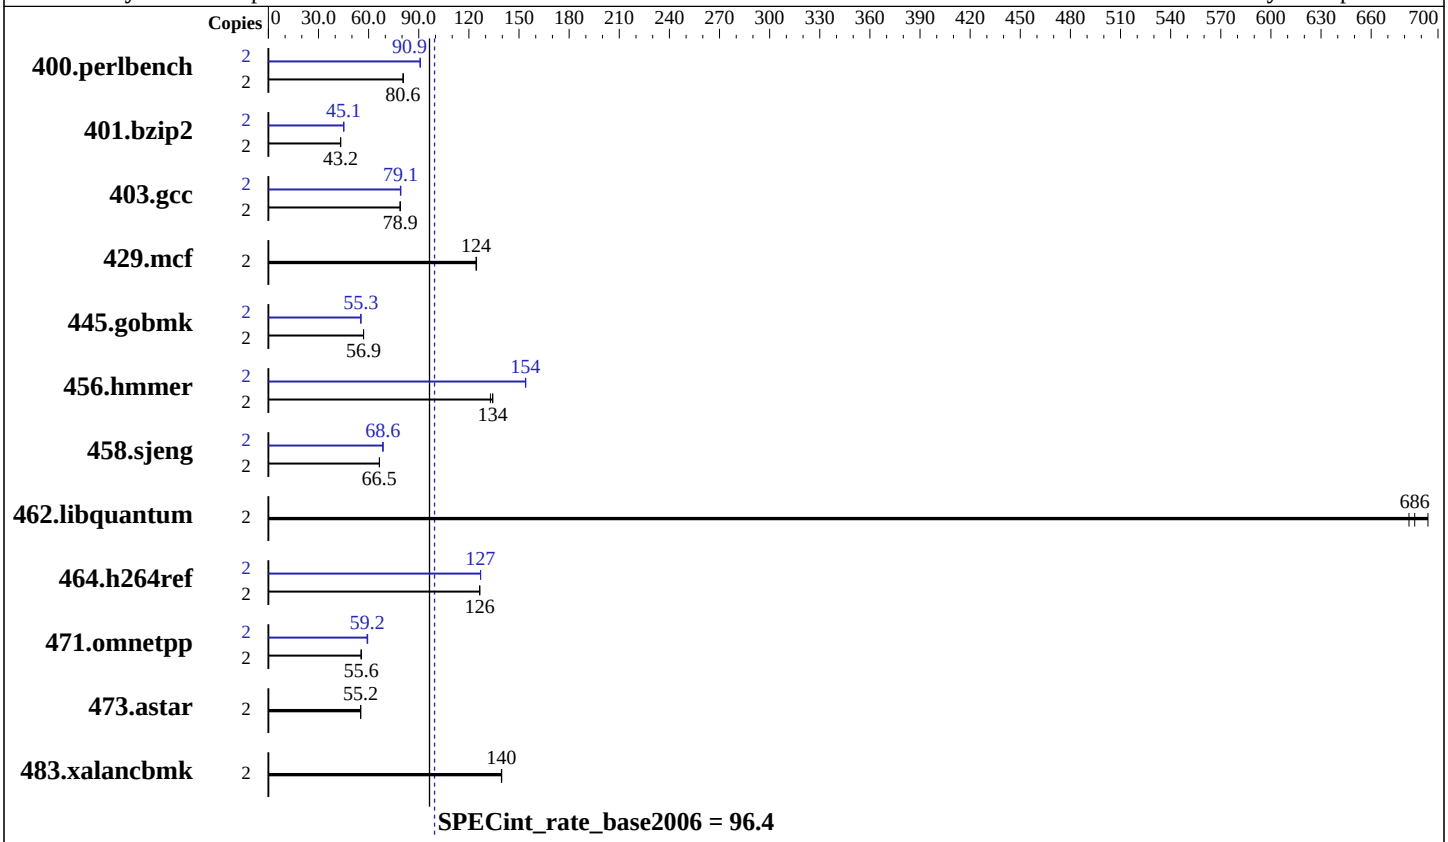

Hardware

CPU Name:	Intel Pentium G4400
CPU Characteristics:	
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC4-2133P-U)
Disk Subsystem:	1 x 750 GB SATA III, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5029S-TN2
(X11SSV-Q , Intel Pentium G4400)

SPECint_rate2006 = 99.4

SPECint_rate_base2006 = 96.4

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Dec-2015
Hardware Availability: Sep-2015
Software Availability: Sep-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	242	80.8	242	80.6	**242**	**80.6**	2	**215**	**90.9**	215	90.9	215	90.9
401.bzip2	2	447	43.2	**446**	**43.2**	446	43.3	2	427	45.2	**428**	**45.1**	429	45.0
403.gcc	2	204	79.0	204	78.8	**204**	**78.9**	2	203	79.3	**203**	**79.1**	204	79.0
429.mcf	2	146	125	147	124	**147**	**124**	2	146	125	147	124	**147**	**124**
445.gobmk	2	368	57.0	**368**	**56.9**	369	56.9	2	379	55.3	379	55.3	**379**	**55.3**
456.hmmer	2	139	134	**139**	**134**	140	133	2	121	154	121	154	**121**	**154**
458.sjeng	2	364	66.5	364	66.4	**364**	**66.5**	2	353	68.6	353	68.6	**353**	**68.6**
462.libquantum	2	59.7	694	**60.4**	**686**	60.7	683	2	59.7	694	**60.4**	**686**	60.7	683
464.h264ref	2	350	126	350	126	**350**	**126**	2	348	127	349	127	**349**	**127**
471.omnetpp	2	225	55.5	**225**	**55.6**	225	55.6	2	211	59.2	210	59.4	**211**	**59.2**
473.astar	2	255	55.2	**254**	**55.2**	254	55.3	2	255	55.2	**254**	**55.2**	254	55.3
483.xalancbmk	2	98.8	140	99.0	139	**98.9**	**140**	2	98.8	140	99.0	139	**98.9**	**140**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /home/cpu2006_ic16/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Dec 18 06:59:33 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Pentium(R) CPU G4400 @ 3.30GHz
      1 "physical id"s (chips)
      2 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 2
      siblings  : 2
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0 1
     cache size : 3072 KB

  From /proc/meminfo
     MemTotal:       16164312 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.1 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.1"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

  uname -a:
     Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
     EST 2015 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Dec 17 20:35

  SPEC is set to: /home/cpu2006_ic16
     Filesystem            Type  Size  Used Avail Use% Mounted on
     /dev/mapper/rhel-home xfs   216G  183G   34G  85% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. 1.0a 11/03/2015
    Memory:
     2x Samsung M471A1G43DB0-CPB 8 GB 2 rank 2133 MHz

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/home/cpu2006_ic16/libs/32:/home/cpu2006_ic16/libs/64:/home/cpu2006_ic16/sh"

  Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
  memory using RedHat EL 7.1
```

Continued on next page

General Notes (Continued)

```
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64`
458.sjeng: `-D_FILE_OFFSET_BITS=64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen:threadsafe`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-par-num-threads=1`(pass 1)
`-prof-use`(pass 2) `-auto-ilp32`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen:threadsafe`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-par-num-threads=1`(pass 1)
`-prof-use`(pass 2) `-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 9 17:21:01 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 February 2016.