SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer F618R2-FC0
(X10DRFF-C , Intel Xeon E5-2695 v4)

SPECint®_rate2006 = 1460

SPECint_rate_base2006 = 1400

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

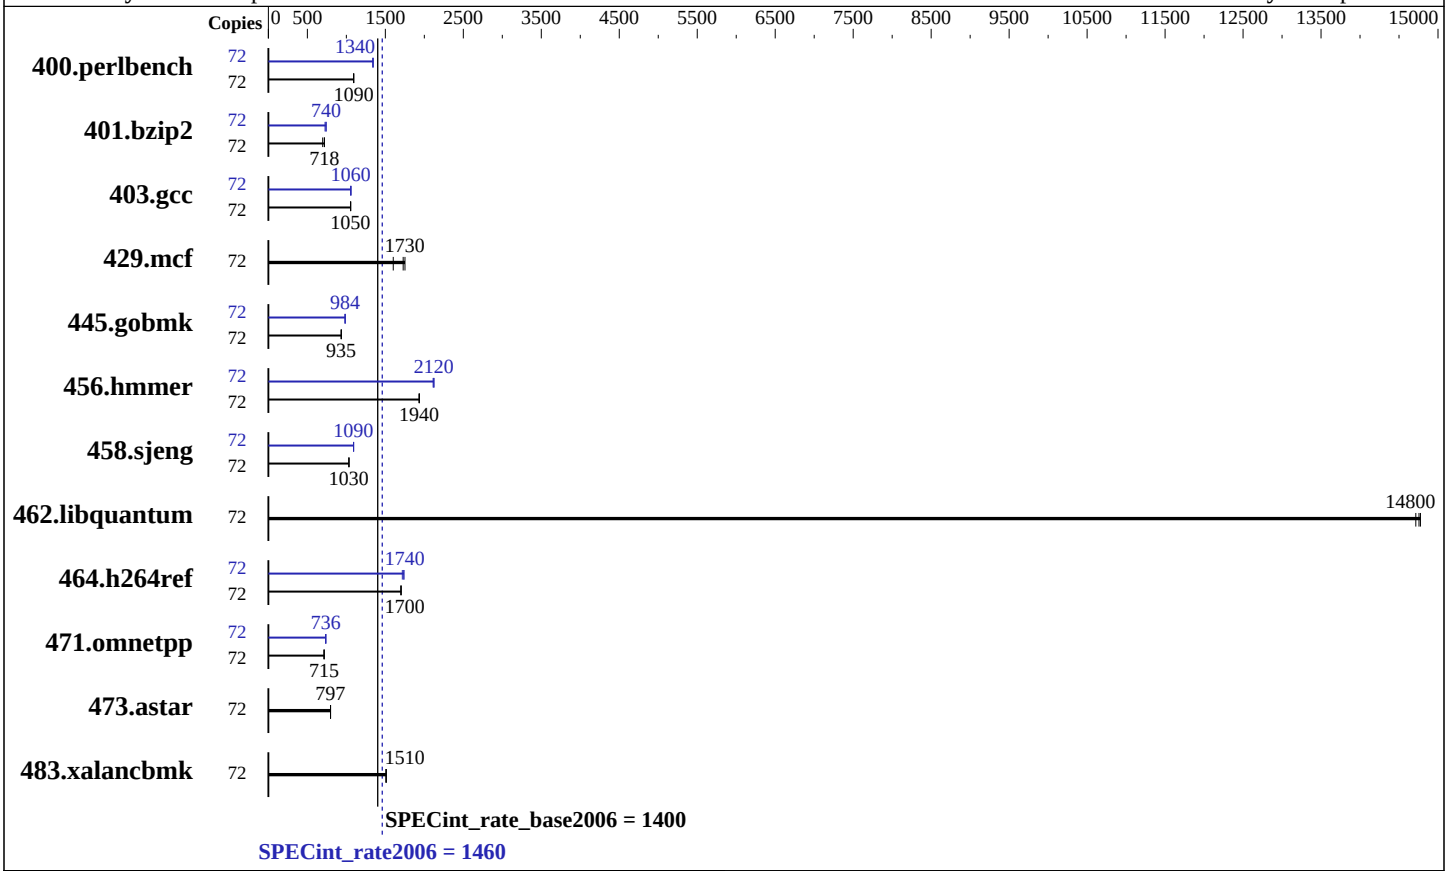

Hardware

CPU Name:	Intel Xeon E5-2695 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	36 cores, 2 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	2 x 100 GB SAS SSD, RAID 0
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2, Kernel 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer F618R2-FC0
(X10DRFF-C , Intel Xeon E5-2695 v4)

SPECint_rate2006 = 1460

SPECint_rate_base2006 = 1400

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	**643**	**1090**	643	1090	643	1090	72	**525**	**1340**	525	1340	523	1340
401.bzip2	72	**968**	**718**	998	696	967	719	72	939	740	956	727	**939**	**740**
403.gcc	72	549	1060	**550**	**1050**	550	1050	72	**547**	**1060**	547	1060	549	1060
429.mcf	72	375	1750	410	1600	**380**	**1730**	72	375	1750	410	1600	**380**	**1730**
445.gobmk	72	809	934	**808**	**935**	807	936	72	768	984	**767**	**984**	767	985
456.hmmer	72	348	1930	347	1940	**347**	**1940**	72	**317**	**2120**	316	2120	318	2110
458.sjeng	72	843	1030	844	1030	**843**	**1030**	72	797	1090	**797**	**1090**	797	1090
462.libquantum	72	101	14700	**101**	**14800**	101	14800	72	101	14700	**101**	**14800**	101	14800
464.h264ref	72	**937**	**1700**	936	1700	938	1700	72	928	1720	917	1740	**918**	**1740**
471.omnetpp	72	630	714	629	716	**629**	**715**	72	613	734	**611**	**736**	611	737
473.astar	72	634	797	634	797	**634**	**797**	72	634	797	634	797	**634**	**797**
483.xalancbmk	72	**329**	**1510**	329	1510	329	1510	72	**329**	**1510**	329	1510	329	1510

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Enforce POR = Disabled
Memory Frequency = 2400
Early Snoop = Disable
COD Enable = Enable
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on X10DRFF-01 Thu Mar  3 22:37:32 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2695 v4 @ 2.10GHz
      2 "physical id"s (chips)
      72 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 18
         siblings  : 36
         physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
         physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      cache size : 23040 KB

   From /proc/meminfo
      MemTotal:       131913884 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      os-release:
         NAME="Red Hat Enterprise Linux Server"
         VERSION="7.2 (Maipo)"
         ID="rhel"
         ID_LIKE="fedora"
         VERSION_ID="7.2"
         PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
         ANSI_COLOR="0;31"
         CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
      redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
      system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

   uname -a:
      Linux X10DRFF-01 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Mar 3 22:36

   SPEC is set to: /usr/cpu2006
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda2      xfs   181G  6.5G  175G   4% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS American Megatrends Inc. 2.0 01/11/2016
     Memory:
      8x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
  401.bzip2: -D_FILE_OFFSET_BITS=64
    403.gcc: -D_FILE_OFFSET_BITS=64
    429.mcf: -D_FILE_OFFSET_BITS=64
  445.gobmk: -D_FILE_OFFSET_BITS=64
  456.hmmer: -D_FILE_OFFSET_BITS=64
  458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
  464.h264ref: -D_FILE_OFFSET_BITS=64
  471.omnetpp: -D_FILE_OFFSET_BITS=64
    473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1)
`-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2)
`-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 12:43:36 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 April 2016.