SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-2E (Intel Xeon E5-2609 v4)

SPECfp®2006 = 76.0

SPECfp_base2006 = 73.8

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Mar-2016
Hardware Availability: Apr-2016
Software Availability: Jan-2016

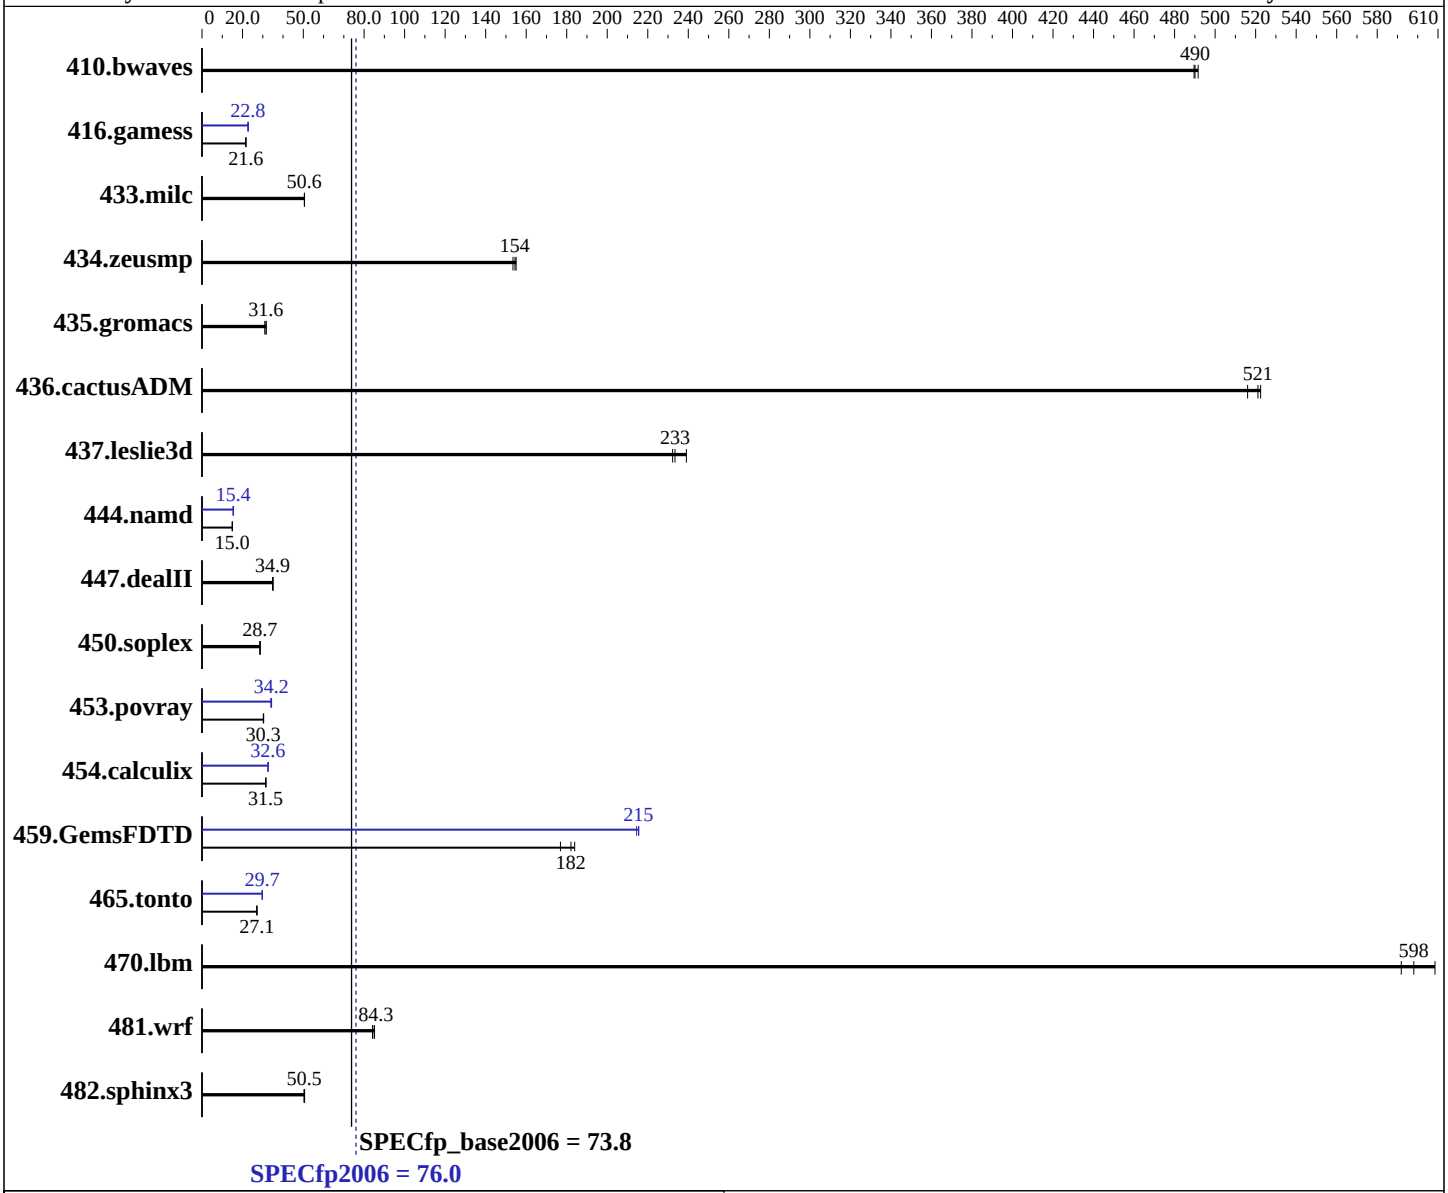

Hardware

CPU Name:	Intel Xeon E5-2609 v4
CPU Characteristics:	
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) Kernel 3.10.0-327.4.5.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-2E (Intel Xeon E5-2609 v4)

SPECfp2006 = 76.0

SPECfp_base2006 = 73.8

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Mar-2016
Hardware Availability: Apr-2016
Software Availability: Jan-2016

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)
Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**27.7**	**490**	27.6	492	27.8	490	**27.7**	**490**	27.6	492	27.8	490
416.gamess	905	21.6	904	21.7	**905**	**21.6**	**861**	**22.8**	862	22.7	860	22.8
433.milc	182	50.5	**182**	**50.6**	181	50.6	182	50.5	**182**	**50.6**	181	50.6
434.zeusmp	**58.9**	**154**	59.3	153	58.7	155	**58.9**	**154**	59.3	153	58.7	155
435.gromacs	226	31.7	231	31.0	**226**	**31.6**	226	31.7	231	31.0	**226**	**31.6**
436.cactusADM	**22.9**	**521**	23.2	516	22.9	522	**22.9**	**521**	23.2	516	22.9	522
437.leslie3d	40.5	232	39.3	239	**40.3**	**233**	40.5	232	39.3	239	**40.3**	**233**
444.namd	**536**	**15.0**	536	15.0	536	15.0	520	15.4	520	15.4	**520**	**15.4**
447.dealII	**328**	**34.9**	326	35.1	328	34.9	**328**	**34.9**	326	35.1	328	34.9
450.soplex	291	28.7	**291**	**28.7**	291	28.6	291	28.7	**291**	**28.7**	291	28.6
453.povray	176	30.3	**176**	**30.3**	175	30.4	155	34.4	**156**	**34.2**	156	34.0
454.calculix	262	31.5	**262**	**31.5**	262	31.5	253	32.6	**253**	**32.6**	253	32.5
459.GemsFDTD	60.0	177	57.7	184	**58.3**	**182**	49.2	216	**49.2**	**215**	49.5	215
465.tonto	363	27.1	**363**	**27.1**	363	27.1	**331**	**29.7**	330	29.8	331	29.7
470.lbm	22.6	609	23.2	592	**23.0**	**598**	22.6	609	23.2	592	**23.0**	**598**
481.wrf	131	85.1	**132**	**84.3**	133	84.1	131	85.1	**132**	**84.3**	133	84.1
482.sphinx3	385	50.7	387	50.4	**386**	**50.5**	385	50.7	387	50.4	**386**	**50.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
 Power Management Policy: Custom
 Energy Performance: Performance
 Patrol Scrub: Disabled
 Snoop Mode: Home Snoop with Directory
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
OMP_NUM_THREADS = "16"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Peak Portability Flags

```
Same as Base Portability Flags
```

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevB.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 13:12:40 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2016.