



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7048GR-TR
(X10DRG-Q , Intel Xeon E5-2687W v4)

SPECint®2006 = 70.1

SPECint_base2006 = 66.6

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

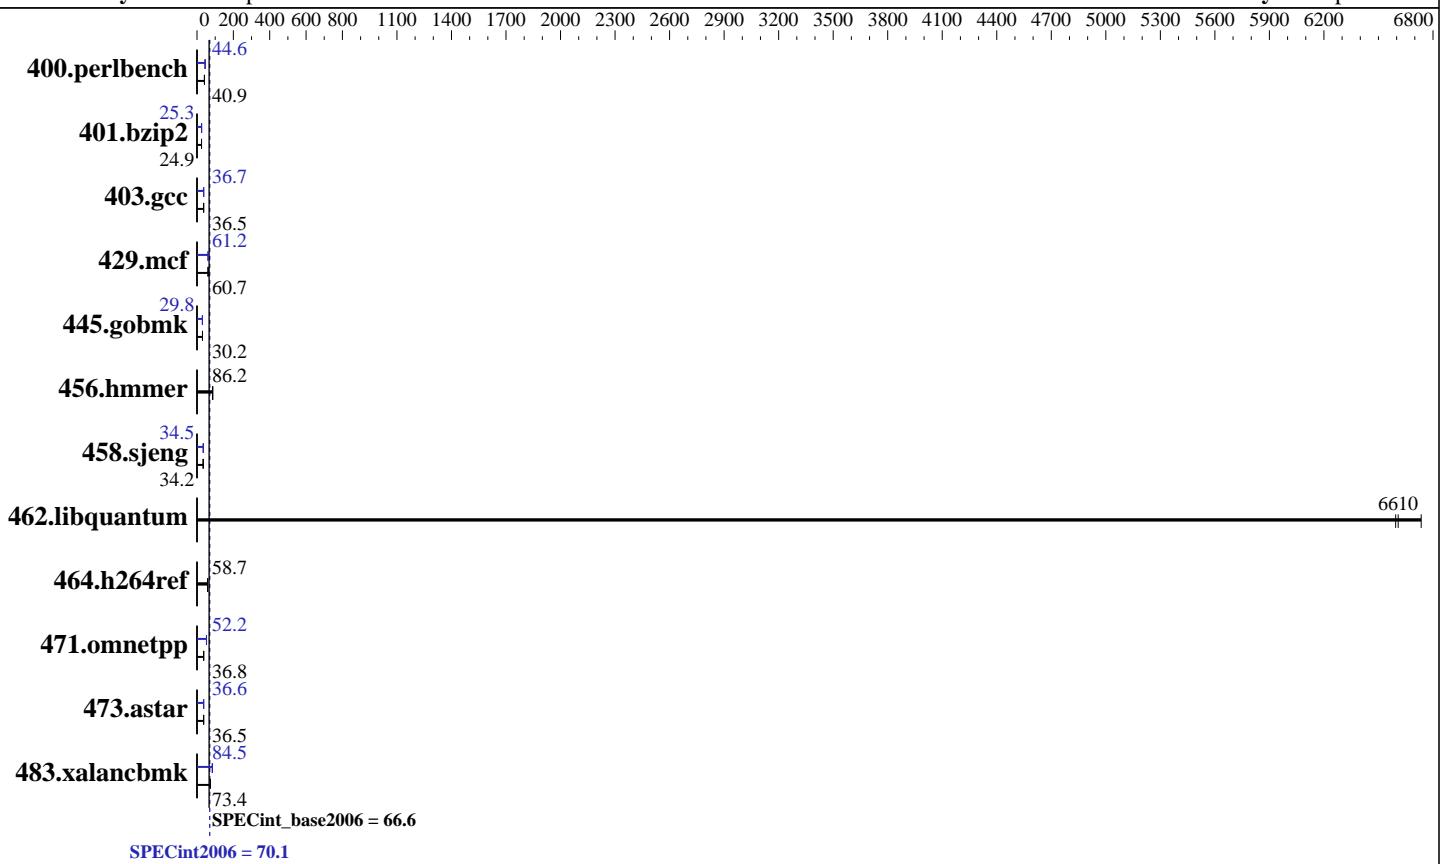

Hardware

CPU Name: Intel Xeon E5-2687W v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz: 3000
FPU: Integrated
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (8 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 750 GB SATA III, 7200 RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.2, Kernel 3.10.0-327.el7.x86_64
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7048GR-TR
(X10DRG-Q , Intel Xeon E5-2687W v4)

SPECint2006 = 70.1

SPECint_base2006 = 66.6

CPU2006 license: 001176

Test date: Apr-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	238	41.1	<u>239</u>	<u>40.9</u>	239	40.8	<u>219</u>	<u>44.6</u>	219	44.6	219	44.5
401.bzip2	<u>388</u>	<u>24.9</u>	387	24.9	388	24.9	<u>381</u>	<u>25.3</u>	382	25.3	<u>381</u>	<u>25.3</u>
403.gcc	221	36.4	221	36.5	<u>221</u>	<u>36.5</u>	<u>220</u>	<u>36.7</u>	219	36.7	220	36.6
429.mcf	150	60.7	147	62.1	<u>150</u>	<u>60.7</u>	<u>149</u>	<u>61.3</u>	<u>149</u>	<u>61.2</u>	149	61.2
445.gobmk	<u>348</u>	<u>30.2</u>	348	30.2	348	30.1	352	29.8	<u>352</u>	<u>29.8</u>	352	29.8
456.hmmer	<u>108</u>	<u>86.2</u>	108	86.2	108	86.1	<u>108</u>	<u>86.2</u>	108	86.2	108	86.1
458.sjeng	<u>354</u>	<u>34.2</u>	354	34.2	354	34.1	<u>350</u>	<u>34.5</u>	351	34.5	350	34.6
462.libquantum	3.08	6740	<u>3.14</u>	<u>6610</u>	3.14	6590	3.08	6740	<u>3.14</u>	<u>6610</u>	3.14	6590
464.h264ref	376	58.9	377	58.7	<u>377</u>	<u>58.7</u>	376	58.9	377	58.7	<u>377</u>	<u>58.7</u>
471.omnetpp	<u>170</u>	<u>36.8</u>	174	35.9	168	37.2	119	52.6	<u>120</u>	<u>52.2</u>	120	52.1
473.astar	193	36.5	192	36.6	<u>193</u>	<u>36.5</u>	<u>192</u>	<u>36.6</u>	192	36.5	192	36.6
483.xalancbmk	94.0	73.4	94.2	73.2	<u>94.1</u>	<u>73.4</u>	<u>81.6</u>	<u>84.5</u>	81.6	84.5	81.7	84.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Early Snoop = Disable

Enforce POR = Disabled

Memory Frequency = 2400

Hyper-Threading (ALL) = Disable

Sysinfo program /home/cpu2006_ic16/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Thu Apr 14 11:03:12 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2687W v4@ 3.00GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7048GR-TR
(X10DRG-Q , Intel Xeon E5-2687W v4)

SPECint2006 = 70.1

SPECint_base2006 = 66.6

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Platform Notes (Continued)

```
caution.)  
    cpu cores : 12  
    siblings   : 12  
    physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13  
    physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13  
    cache size : 30720 KB  
  
From /proc/meminfo  
MemTotal:      263850436 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux Server"  
  VERSION="7.2 (Maipo)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VERSION_ID="7.2"  
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"  
  ANSI_COLOR="0;31"  
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server  
  
uname -a:  
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29  
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Apr 14 10:31  
  
SPEC is set to: /home/cpu2006_ic16  
Filesystem           Type  Size  Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs   216G  3.8G  213G   2% /home  
Additional information from dmidecode:  
  
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.  
  
BIOS American Megatrends Inc. 2.0 12/31/2015  
Memory:  
 8x Micron 36ASF4G72PZ-2G3A1 32 GB 2 rank 2400 MHz  
 8x NO DIMM NO DIMM  
  
(End of data from sysinfo program)
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7048GR-TR
(X10DRG-Q , Intel Xeon E5-2687W v4)

SPECint2006 = 70.1

SPECint_base2006 = 66.6

CPU2006 license: 001176

Test date: Apr-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2006_ic16/libs/32:/home/cpu2006_ic16/libs/64:/home/cpu2006_ic16/sh"

OMP_NUM_THREADS = "24"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -DSPEC_CPU_LP64

456.hmmr: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -DSPEC_CPU_LP64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32

-Wl,-z,muldefs -L/sh -lsmartheap64



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7048GR-TR
(X10DRG-Q , Intel Xeon E5-2687W v4)

SPECint2006 = 70.1

SPECint_base2006 = 66.6

CPU2006 license: 001176

Test date: Apr-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmr: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch

-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div

-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7048GR-TR
(X10DRG-Q , Intel Xeon E5-2687W v4)

SPECint2006 = 70.1

SPECint_base2006 = 66.6

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

401.bzip2 (continued):
 -opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
 -opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmr: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2)
 -opt-ra-region-strategy=block -ansi-alias
 -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
 -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
 -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7048GR-TR
(X10DRG-Q , Intel Xeon E5-2687W v4)

SPECint2006 = 70.1

SPECint_base2006 = 66.6

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 3 18:00:27 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 May 2016.