SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECfp®2006 = 126

SPECfp_base2006 = 119

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Apr-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

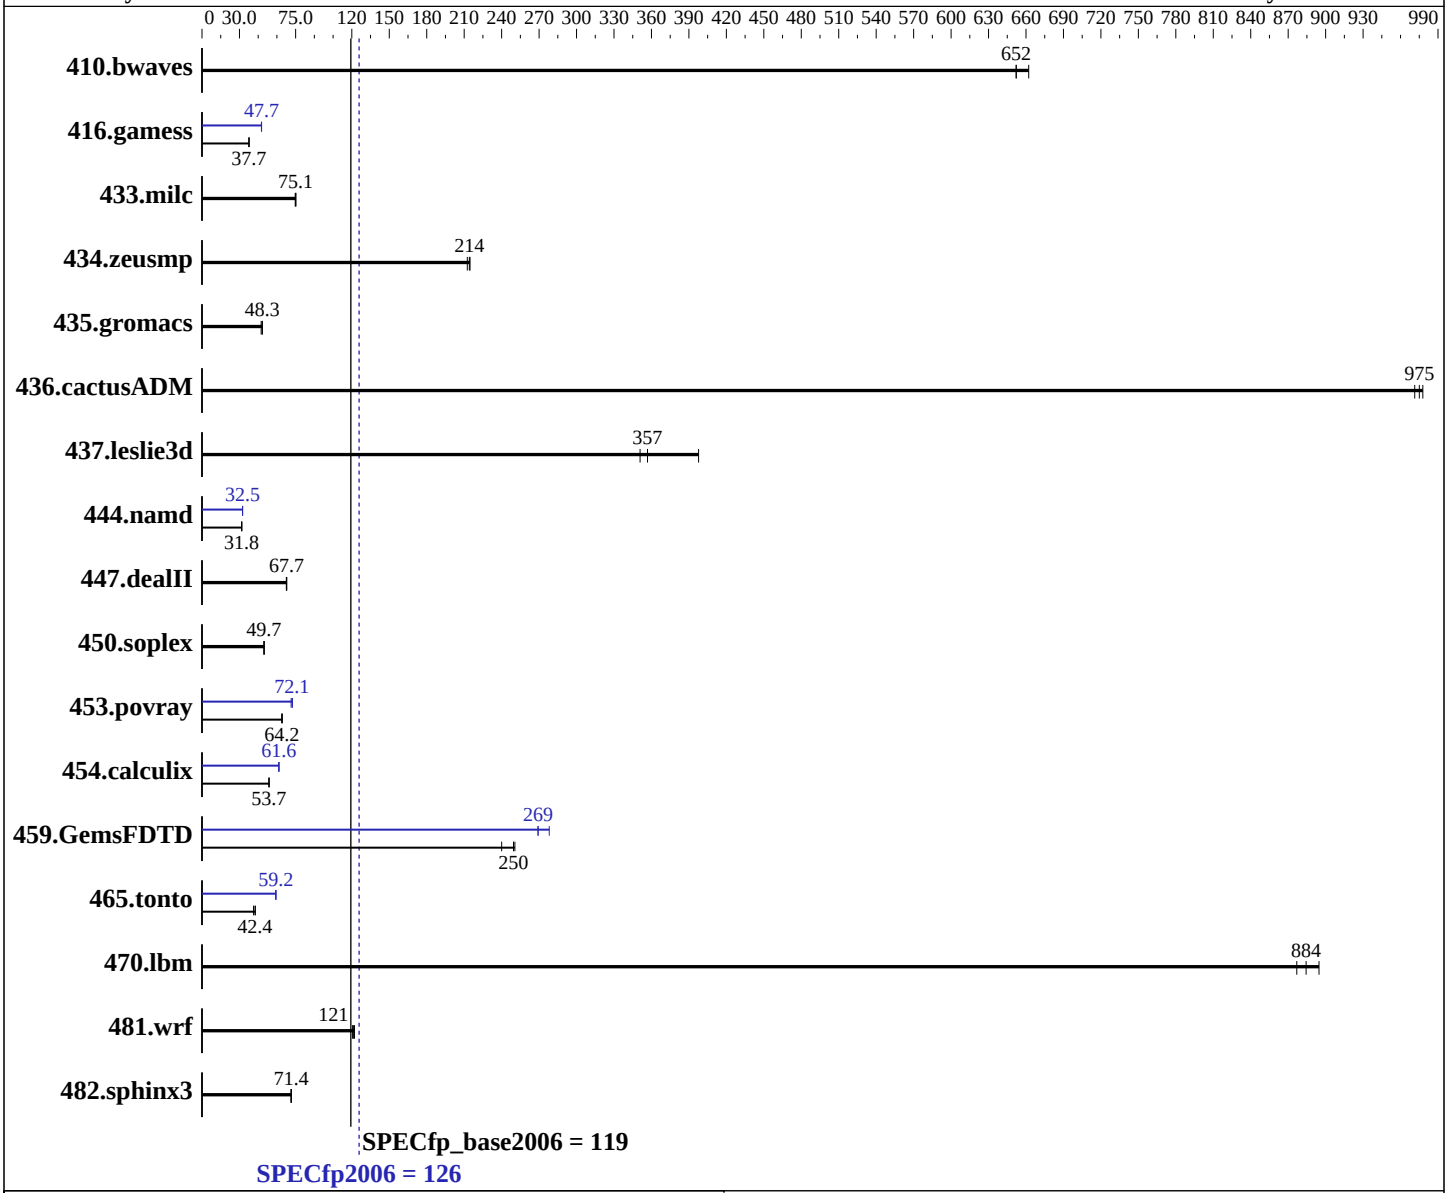

Hardware

CPU Name:	Intel Xeon E5-2697 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	36 cores, 2 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) Kernel 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECfp2006 = 126

SPECfp_base2006 = 119

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Apr-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 1
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	20.8	652	20.5	662	**20.8**	**652**	20.8	652	20.5	662	**20.8**	**652**
416.gamess	519	37.7	**520**	**37.7**	521	37.6	**411**	**47.7**	411	47.6	410	47.7
433.milc	123	74.7	**122**	**75.1**	122	75.2	123	74.7	**122**	**75.1**	122	75.2
434.zeusmp	**42.5**	**214**	42.4	215	42.8	212	**42.5**	**214**	42.4	215	42.8	212
435.gromacs	148	48.3	**148**	**48.3**	151	47.4	148	48.3	**148**	**48.3**	151	47.4
436.cactusADM	**12.3**	**975**	12.3	971	12.2	978	**12.3**	**975**	12.3	971	12.2	978
437.leslie3d	**26.3**	**357**	23.6	398	26.8	351	**26.3**	**357**	23.6	398	26.8	351
444.namd	253	31.7	252	31.9	**252**	**31.8**	247	32.5	**247**	**32.5**	246	32.5
447.dealII	**169**	**67.7**	169	67.6	168	67.9	**169**	**67.7**	169	67.6	168	67.9
450.soplex	**168**	**49.7**	168	49.6	167	49.9	**168**	**49.7**	168	49.6	167	49.9
453.povray	82.8	64.3	83.4	63.8	**82.9**	**64.2**	74.5	71.4	**73.7**	**72.1**	73.4	72.4
454.calculix	154	53.6	**154**	**53.7**	154	53.7	134	61.6	**134**	**61.6**	134	61.6
459.GemsFDTD	**42.5**	**250**	42.3	251	44.2	240	**39.4**	**269**	39.4	269	38.1	278
465.tonto	238	41.3	230	42.7	**232**	**42.4**	**166**	**59.2**	167	59.0	166	59.2
470.lbm	**15.5**	**884**	15.4	895	15.7	877	**15.5**	**884**	15.4	895	15.7	877
481.wrf	**92.0**	**121**	92.6	121	91.5	122	**92.0**	**121**	92.6	121	91.5	122
482.sphinx3	**273**	**71.4**	272	71.5	273	71.3	**273**	**71.4**	272	71.5	273	71.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS Configuration:
  Intel Hyperthreading Option set to Enabled
  Power Profile set to Custom
  Power Regulator set to Static High Performance Mode
  Minimum Processor Idle Power Core C-State set to C1E State
  Minimum Processor Idle Power Package C-State set to No Package State
  Collaborative Power Control set to Disabled
  QPI Snoop Configuration set to Home Snoop
```

Continued on next page

Platform Notes (Continued)

```
    Thermal Configuration set to Maximum Cooling
    Processor Power and Utilization Monitoring set to Disabled
    Memory Double Refresh Rate set to 1x Refresh
    Energy Performance Bias set to Maximum Performance
  Sysinfo program
  /home/specuser/specsuite/HP_build_ic16_suite_corrected_int_bins/cpu2006/config/sysinfo.rev6914
  $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
  running on ml350bdwspec Fri Apr 15 17:33:03 2016

  This section contains SUT (System Under Test) info as seen by
  some common utilities.  To remove or add to this section, see:
    http://www.spec.org/cpu2006/Docs/config.html#sysinfo

  From /proc/cpuinfo
     model name : Intel(R) Xeon(R) CPU E5-2697 v4 @ 2.30GHz
        2 "physical id"s (chips)
        72 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 18
        siblings  : 36
        physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
        physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
     cache size : 46080 KB

  From /proc/meminfo
     MemTotal:       528061732 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.2 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.2"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

  uname -a:
     Linux ml350bdwspec 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Apr 15 17:32

  SPEC is set to:
```

Continued on next page

Platform Notes (Continued)

```
/home/specuser/specsuite/HP_build_ic16_suite_corrected_int_bins/cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda5      xfs   318G  241G   78G  76% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS HP P92 02/22/2016
  Memory:
   8x UNKNOWN NOT AVAILABLE
   16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 512 GB and the dmidecode description should have one line reading as:
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
OMP_NUM_THREADS = "36"
LD_LIBRARY_PATH = "/home/specuser/specsuite/HP_build_ic16_suite_corrected_int_bins/cpu2006/libs/32:/home/specuser/specsuite/HP_build_ic16_suite_corrected_int_bins/cpu2006/libs/64:/home/specuser/specsuite/HP_build_ic16_suite_corrected_int_bins/cpu2006/sh"
 Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB
 memory using RedHat EL 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -fp-model fast=2
-qopt-prefetch-issue-excl-hint

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
-fp-model fast=2
-qopt-prefetch-issue-excl-hint

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-fp-model fast=2
-qopt-prefetch-issue-excl-hint

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -fp-model fast=2
-qopt-prefetch-issue-excl-hint

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

Continued on next page

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html
http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml
http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 3 18:00:42 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 May 2016.