



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

SPECfp®2006 = 125

SPECfp_base2006 = 119

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Dec-2015

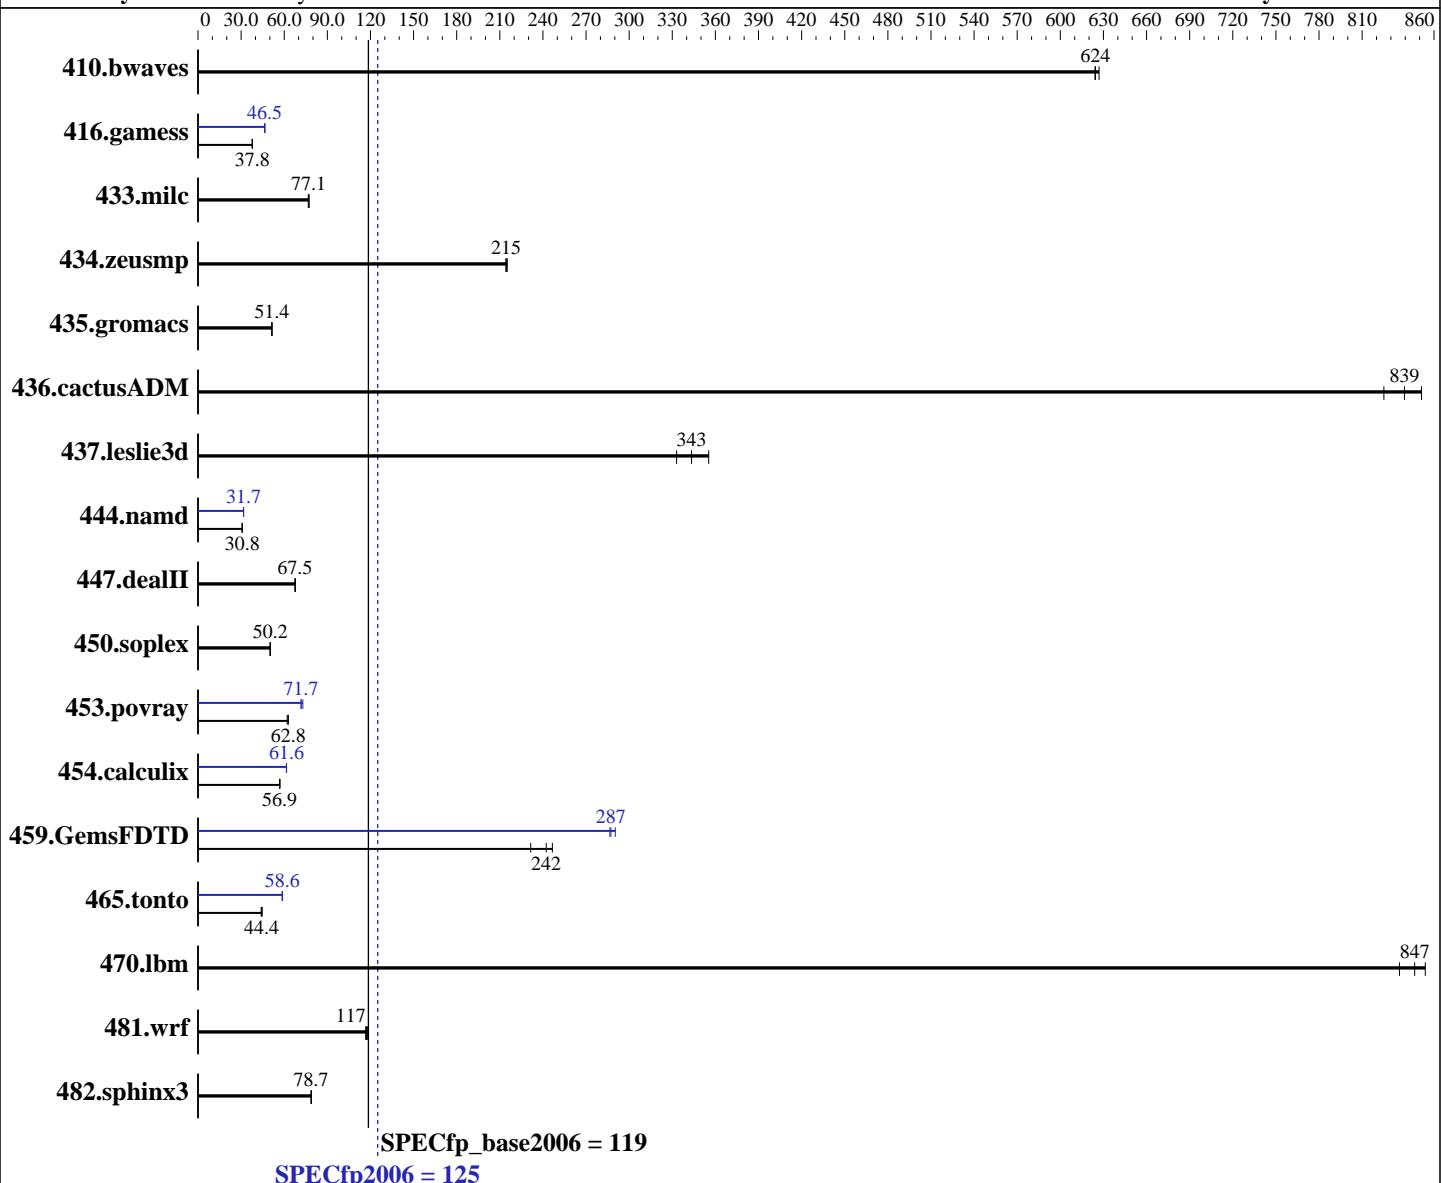

Hardware

CPU Name: Intel Xeon E5-2690 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Compiler: 3.12.49-11-default
 Auto Parallel: C/C++: Version 16.0.0.101 of Intel C++ Studio XE
 File System: for Linux;
 System State: Fortran: Version 16.0.0.101 of Intel Fortran
 Studio XE for Linux
 Yes
 xfs
 Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

SPECfp2006 = 125

SPECfp_base2006 = 119

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Dec-2015

L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 600 GB SAS, 10K RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	21.7	627	21.8	624	21.8	624	21.7	627	21.8	624	21.8	624
416.gamess	517	37.8	519	37.7	518	37.8	422	46.4	421	46.5	421	46.5
433.milc	120	76.7	119	77.1	119	77.3	120	76.7	119	77.1	119	77.3
434.zeusmp	42.3	215	42.4	215	42.5	214	42.3	215	42.4	215	42.5	214
435.gromacs	139	51.5	139	51.4	139	51.4	139	51.5	139	51.4	139	51.4
436.cactusADM	14.2	839	14.0	851	14.5	825	14.2	839	14.0	851	14.5	825
437.leslie3d	26.5	355	27.4	343	28.2	333	26.5	355	27.4	343	28.2	333
444.namd	261	30.8	261	30.7	261	30.8	253	31.7	253	31.7	253	31.7
447.dealII	169	67.5	169	67.5	169	67.8	169	67.5	169	67.5	169	67.8
450.soplex	166	50.2	166	50.1	165	50.4	166	50.2	166	50.1	165	50.4
453.povray	84.8	62.8	85.7	62.1	84.7	62.8	72.9	73.0	74.2	71.7	74.2	71.7
454.calculix	145	56.9	145	56.9	145	56.8	134	61.6	134	61.6	134	61.5
459.GemsFDTD	43.8	242	43.0	247	45.8	231	37.0	287	36.9	287	36.5	290
465.tonto	222	44.4	221	44.6	224	43.9	167	58.8	168	58.6	168	58.6
470.lbm	16.2	847	16.4	836	16.1	854	16.2	847	16.4	836	16.1	854
481.wrf	95.3	117	95.7	117	94.8	118	95.3	117	95.7	117	94.8	118
482.sphinx3	247	78.9	248	78.7	248	78.7	247	78.9	248	78.7	248	78.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Intel Hyper-Threading Technology option set to Disabled

CPU performance set to Enterprise

Power Technology set to Energy Efficient

Energy Performance BIAS setting set to Balanced Performance

Memory RAS configuration set to Maximum Performance

Memory Power Saving Mode set to Disabled

QPI Snoop Mode set to Home Directory Snoop with OSB

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

SPECfp2006 =

125

SPECfp_base2006 =

119

CPU2006 license: 9019

Test date: Apr-2016

Test sponsor: Cisco Systems

Hardware Availability: Apr-2016

Tested by: Cisco Systems

Software Availability: Dec-2015

Platform Notes (Continued)

running on linux-wg2b Sun Apr 10 02:19:19 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2690 v4@ 2.60GHz
        2 "physical id"s (chips)
        28 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 14
        siblings : 14
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    cache size : 35840 KB
```

```
From /proc/meminfo
MemTotal:      264406532 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-wg2b 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 9 03:17
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdal      xfs   559G   14G   546G   3% /
Additional information from dmidecode:
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

SPECfp2006 = 125

SPECfp_base2006 = 119

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Dec-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. B200M4.3.1.2a.0.022620161405 02/26/2016

Memory:

8x 0xCE00 M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz
 8x 0xCE00 M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz
 8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

OMP_NUM_THREADS = "28"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

SPECfp2006 =

125

SPECfp_base2006 =

119

CPU2006 license: 9019

Test date: Apr-2016

Test sponsor: Cisco Systems

Hardware Availability: Apr-2016

Tested by: Cisco Systems

Software Availability: Dec-2015

Base Portability Flags (Continued)

```
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    450.soplex: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
    454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    470.lbm: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

SPECfp2006 =

125

SPECfp_base2006 =

119

CPU2006 license: 9019

Test date: Apr-2016

Test sponsor: Cisco Systems

Hardware Availability: Apr-2016

Tested by: Cisco Systems

Software Availability: Dec-2015

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
                -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
                -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

SPECfp2006 = 125

SPECfp_base2006 = 119

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

465.tonto (continued):

-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 3 18:01:32 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 May 2016.