SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL450 Gen9
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECfp®2006 = 108

SPECfp_base2006 = 102

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Apr-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

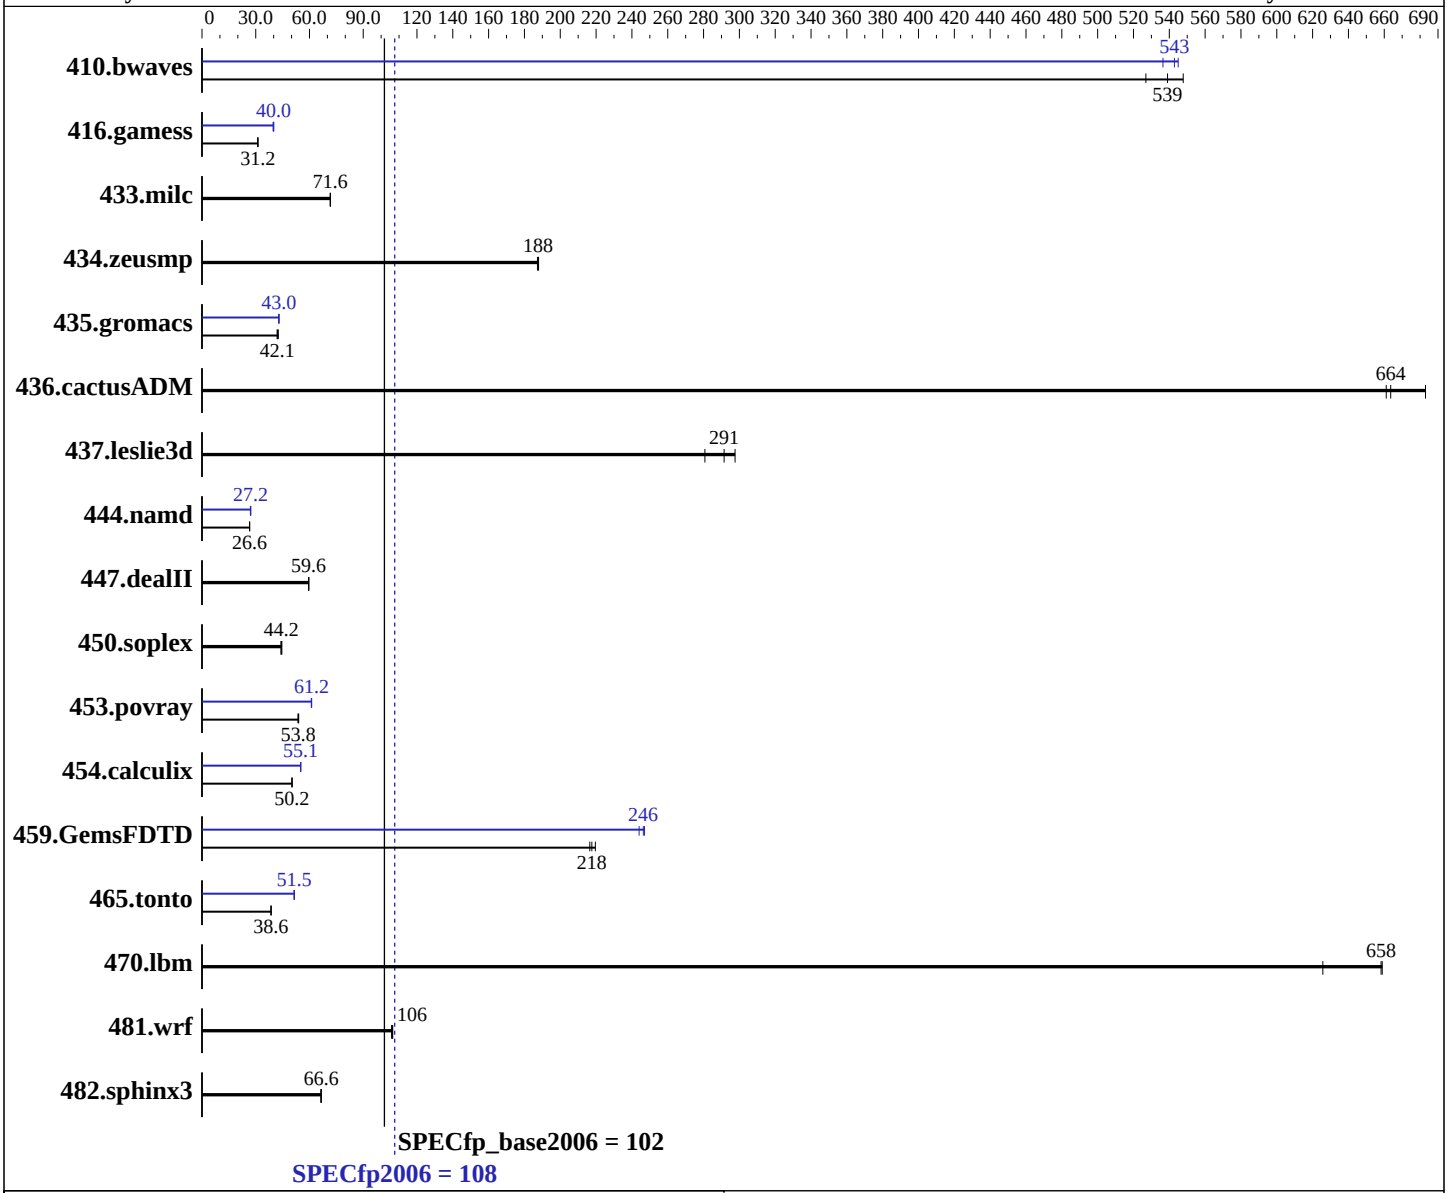

Hardware

CPU Name:	Intel Xeon E5-2620 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) Kernel 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL450 Gen9
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECfp2006 = 108

SPECfp_base2006 = 102

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Apr-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 2 x 400 GB SATA SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	25.8	527	**25.2**	**539**	24.8	548	25.3	536	**25.0**	**543**	24.9	545
416.gamess	**628**	**31.2**	628	31.2	628	31.2	493	39.7	**490**	**40.0**	489	40.1
433.milc	128	71.7	**128**	**71.6**	128	71.6	128	71.7	**128**	**71.6**	128	71.6
434.zeusmp	48.6	187	48.4	188	**48.5**	**188**	48.6	187	48.4	188	**48.5**	**188**
435.gromacs	168	42.6	**170**	**42.1**	170	41.9	166	43.0	167	42.8	**166**	**43.0**
436.cactusADM	17.5	683	**18.0**	**664**	18.1	661	17.5	683	**18.0**	**664**	18.1	661
437.leslie3d	33.5	281	**32.2**	**291**	31.6	298	33.5	281	**32.2**	**291**	31.6	298
444.namd	302	26.6	302	26.5	**302**	**26.6**	**295**	**27.2**	297	27.0	295	27.2
447.dealII	192	59.5	192	59.7	**192**	**59.6**	192	59.5	192	59.7	**192**	**59.6**
450.soplex	189	44.1	**188**	**44.2**	187	44.6	189	44.1	**188**	**44.2**	187	44.6
453.povray	**98.9**	**53.8**	98.5	54.0	99.3	53.6	**87.0**	**61.2**	86.9	61.2	87.2	61.0
454.calculix	**164**	**50.2**	164	50.2	164	50.3	150	55.0	150	55.2	**150**	**55.1**
459.GemsFDTD	48.3	220	**48.8**	**218**	49.0	216	42.9	247	43.5	244	**43.1**	**246**
465.tonto	255	38.5	**255**	**38.6**	255	38.6	**191**	**51.5**	191	51.5	191	51.4
470.lbm	**20.9**	**658**	20.9	659	22.0	626	**20.9**	**658**	20.9	659	22.0	626
481.wrf	106	106	105	106	**105**	**106**	106	106	105	106	**105**	**106**
482.sphinx3	293	66.6	**293**	**66.6**	294	66.4	293	66.6	**293**	**66.6**	294	66.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS Configuration:
  Intel Hyperthreading set to Disable
  Power Profile set to Custom
  Power Regulator set to HP Static High Performance Mode
  Minimum Processor Idle Power Core C-State set to C6 State
  Minimum Processor Idle Power Package C-State set to No Package State
  QPI Snoop Configuration set to Home Snoop
```

Continued on next page

Platform Notes (Continued)

```
      Collaborative Power Control set to Disabled
      Thermal Configuration set to Maximum Cooling
      Processor Power and Utilization Monitoring set to Disabled
      Memory Refresh Rate set to 1x Refresh

    Sysinfo program /home/cpu2006/config/sysinfo.rev6914
    $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
    running on Dangerfield3 Thu Apr 28 12:08:34 2016

    This section contains SUT (System Under Test) info as seen by
    some common utilities.  To remove or add to this section, see:
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
          2 "physical id"s (chips)
          16 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 8
          siblings  : 8
          physical 0: cores 0 1 2 3 4 5 6 7
          physical 1: cores 0 1 2 3 4 5 6 7
       cache size : 20480 KB

    From /proc/meminfo
       MemTotal:       263843940 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       os-release:
          NAME="Red Hat Enterprise Linux Server"
          VERSION="7.2 (Maipo)"
          ID="rhel"
          ID_LIKE="fedora"
          VERSION_ID="7.2"
          PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
          ANSI_COLOR="0;31"
          CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
       redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
       system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

    uname -a:
       Linux Dangerfield3 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
       x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Apr 28 12:00

    SPEC is set to: /home/cpu2006
```

Continued on next page

Platform Notes (Continued)

```
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sdb1      xfs   373G   20G  354G   6% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS HP U21 03/10/2016
    Memory:
     16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 2133 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
OMP_NUM_THREADS = "16"

 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

 Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB
 memory using RedHat EL 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-fp-model fast=2
-qopt-prefetch-issue-excl-hint

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint
-fp-model fast=2

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch
-fp-model fast=2
-qopt-prefetch-issue-excl-hint -funroll-all-loops

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

Continued on next page

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -ansi-alias
-fp-model fast=2 -nofor-main
-qopt-prefetch-issue-excl-hint -funroll-all-loops
-auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html
http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml
http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 17 16:51:28 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 May 2016.