SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6
(2.80 GHz, Intel Xeon E7-8891 v4)

SPECfp®2006 = 133

SPECfp_base2006 = 127

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: May-2016
Hardware Availability: Jun-2016
Software Availability: Dec-2015

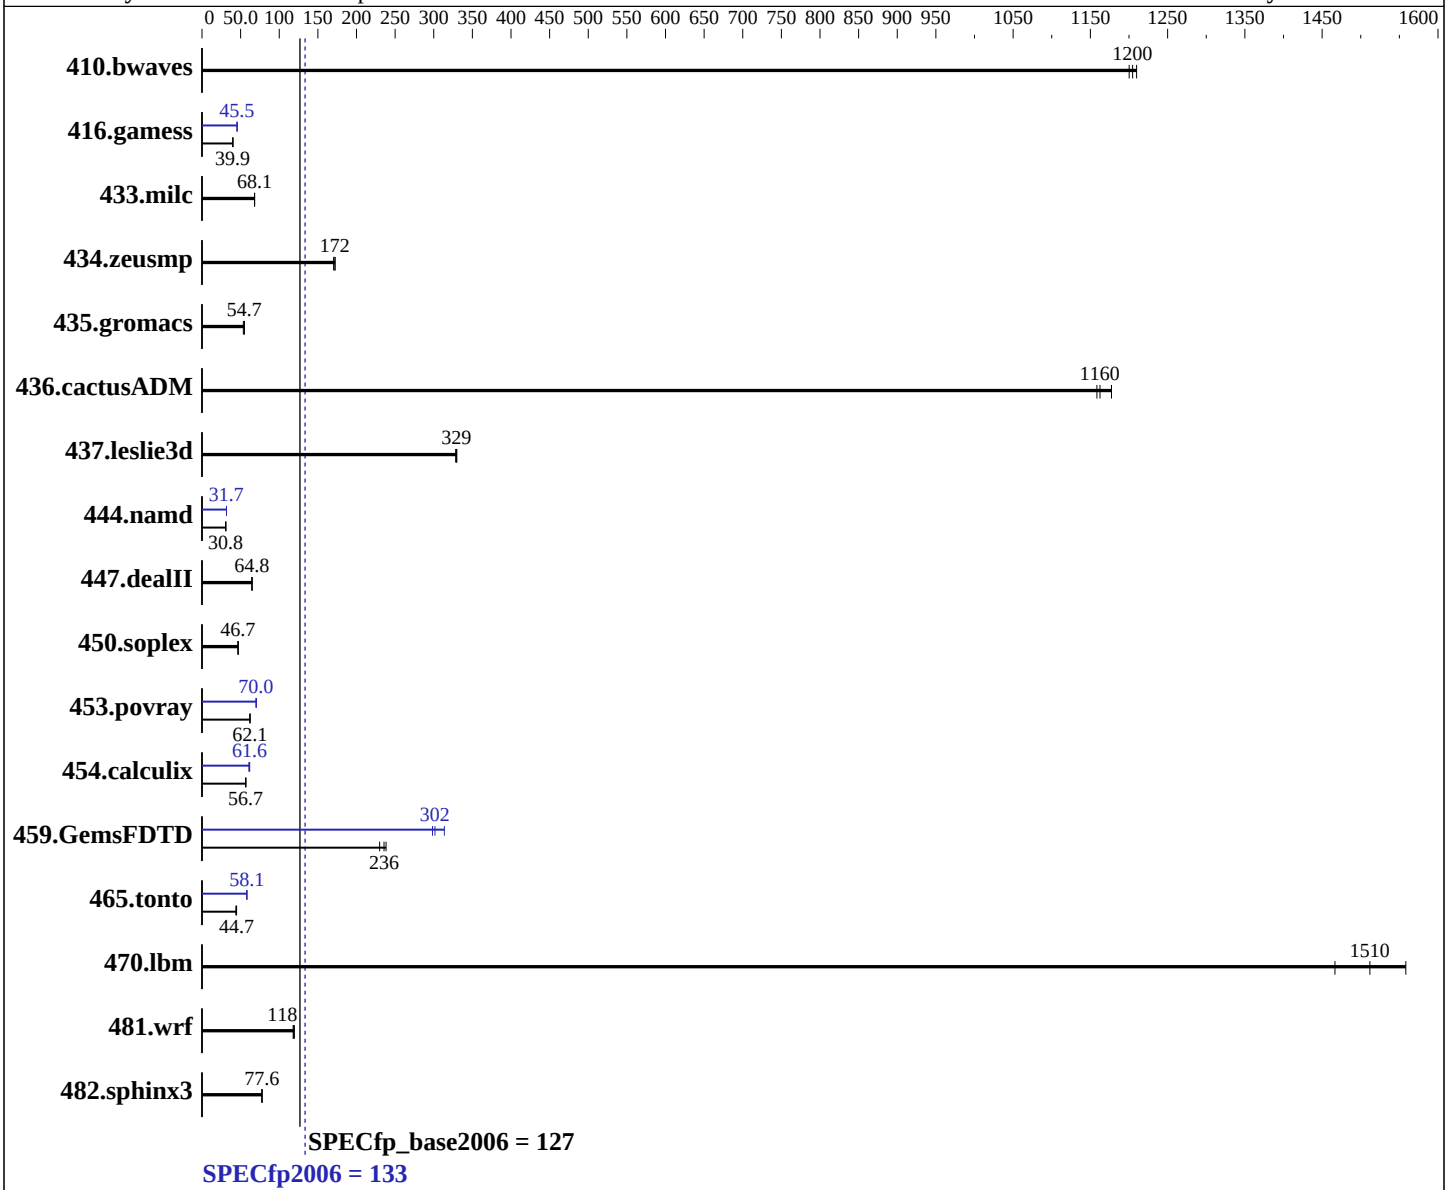

Hardware

CPU Name:	Intel Xeon E7-8891 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) Kernel 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6
(2.80 GHz, Intel Xeon E7-8891 v4)

SPECfp2006 = 133

SPECfp_base2006 = 127

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: May-2016
Hardware Availability: Jun-2016
Software Availability: Dec-2015

L3 Cache: 60 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 1 x 400 GB SATA SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**11.3**	**1200**	11.3	1200	11.2	1210	**11.3**	**1200**	11.3	1200	11.2	1210
416.gamess	489	40.0	491	39.9	**491**	**39.9**	**431**	**45.5**	430	45.5	432	45.3
433.milc	**135**	**68.1**	135	67.9	135	68.1	**135**	**68.1**	135	67.9	135	68.1
434.zeusmp	53.4	170	**52.9**	**172**	52.8	172	53.4	170	**52.9**	**172**	52.8	172
435.gromacs	**130**	**54.7**	130	54.8	133	53.5	**130**	**54.7**	130	54.8	133	53.5
436.cactusADM	10.1	1180	10.3	1160	**10.3**	**1160**	10.1	1180	10.3	1160	**10.3**	**1160**
437.leslie3d	28.6	328	28.5	330	**28.5**	**329**	28.6	328	28.5	330	**28.5**	**329**
444.namd	**261**	**30.8**	261	30.8	261	30.8	**253**	**31.7**	253	31.7	253	31.7
447.dealII	176	64.9	**176**	**64.8**	177	64.6	176	64.9	**176**	**64.8**	177	64.6
450.soplex	**179**	**46.7**	179	46.7	179	46.7	**179**	**46.7**	179	46.7	179	46.7
453.povray	85.9	61.9	85.4	62.3	**85.7**	**62.1**	75.5	70.5	76.0	70.0	**76.0**	**70.0**
454.calculix	**145**	**56.7**	145	56.7	146	56.6	136	60.7	134	61.6	**134**	**61.6**
459.GemsFDTD	44.5	238	**45.0**	**236**	46.1	230	**35.2**	**302**	35.6	298	33.8	314
465.tonto	**220**	**44.7**	225	43.8	220	44.7	169	58.1	**169**	**58.1**	170	58.0
470.lbm	**9.09**	**1510**	9.37	1470	8.82	1560	**9.09**	**1510**	9.37	1470	8.82	1560
481.wrf	93.4	120	94.5	118	**94.5**	**118**	93.4	120	94.5	118	**94.5**	**118**
482.sphinx3	251	77.6	**251**	**77.6**	250	77.9	251	77.6	**251**	**77.6**	250	77.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Configuration:
 Operating Mode set to Maximum Performance
 Hyper-Threading set to Disable
 Patrol Scrub set to Disable
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-fbdw Sat May 14 20:08:49 2016

This section contains SUT (System Under Test) info as seen by
```

Continued on next page

Platform Notes (Continued)

```
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8891 v4 @ 2.80GHz
      4 "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 10
      physical 0: cores 5 9 10 11 13 18 24 26 28 29
      physical 1: cores 5 9 10 11 13 18 24 26 28 29
      physical 2: cores 5 9 10 11 13 18 24 26 28 29
      physical 3: cores 5 9 10 11 13 18 24 26 28 29
   cache size : 61440 KB

From /proc/meminfo
   MemTotal:       529328524 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
   Linux linux-fbdw 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 14 12:32

SPEC is set to: /home/cpu2006-1.2-ic16.0
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   341G   15G  327G   5% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
```

Continued on next page

Platform Notes (Continued)

```
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS LENOVO -[A9E131SDT-1.00]- 04/22/2016
    Memory:
     32x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1600 MHz
     64x NO DIMM Unknown

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"
OMP_NUM_THREADS = "40"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages disabled with:
 echo never > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc

Continued on next page

Peak Optimization Flags (Continued)

465.tonto (continued):
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 13:53:23 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 June 2016.