SPEC® CFP2006 Result

Huawei

Huawei RH5885H V3 (Intel Xeon E7-8891 v4)

SPECfp®2006 = Not Run

SPECfp_base2006 = 115

CPU2006 license:	3175	**Test date:**	May-2016
Test sponsor:	Huawei	**Hardware Availability:**	Jun-2016
Tested by:	Huawei	**Software Availability:**	Oct-2015

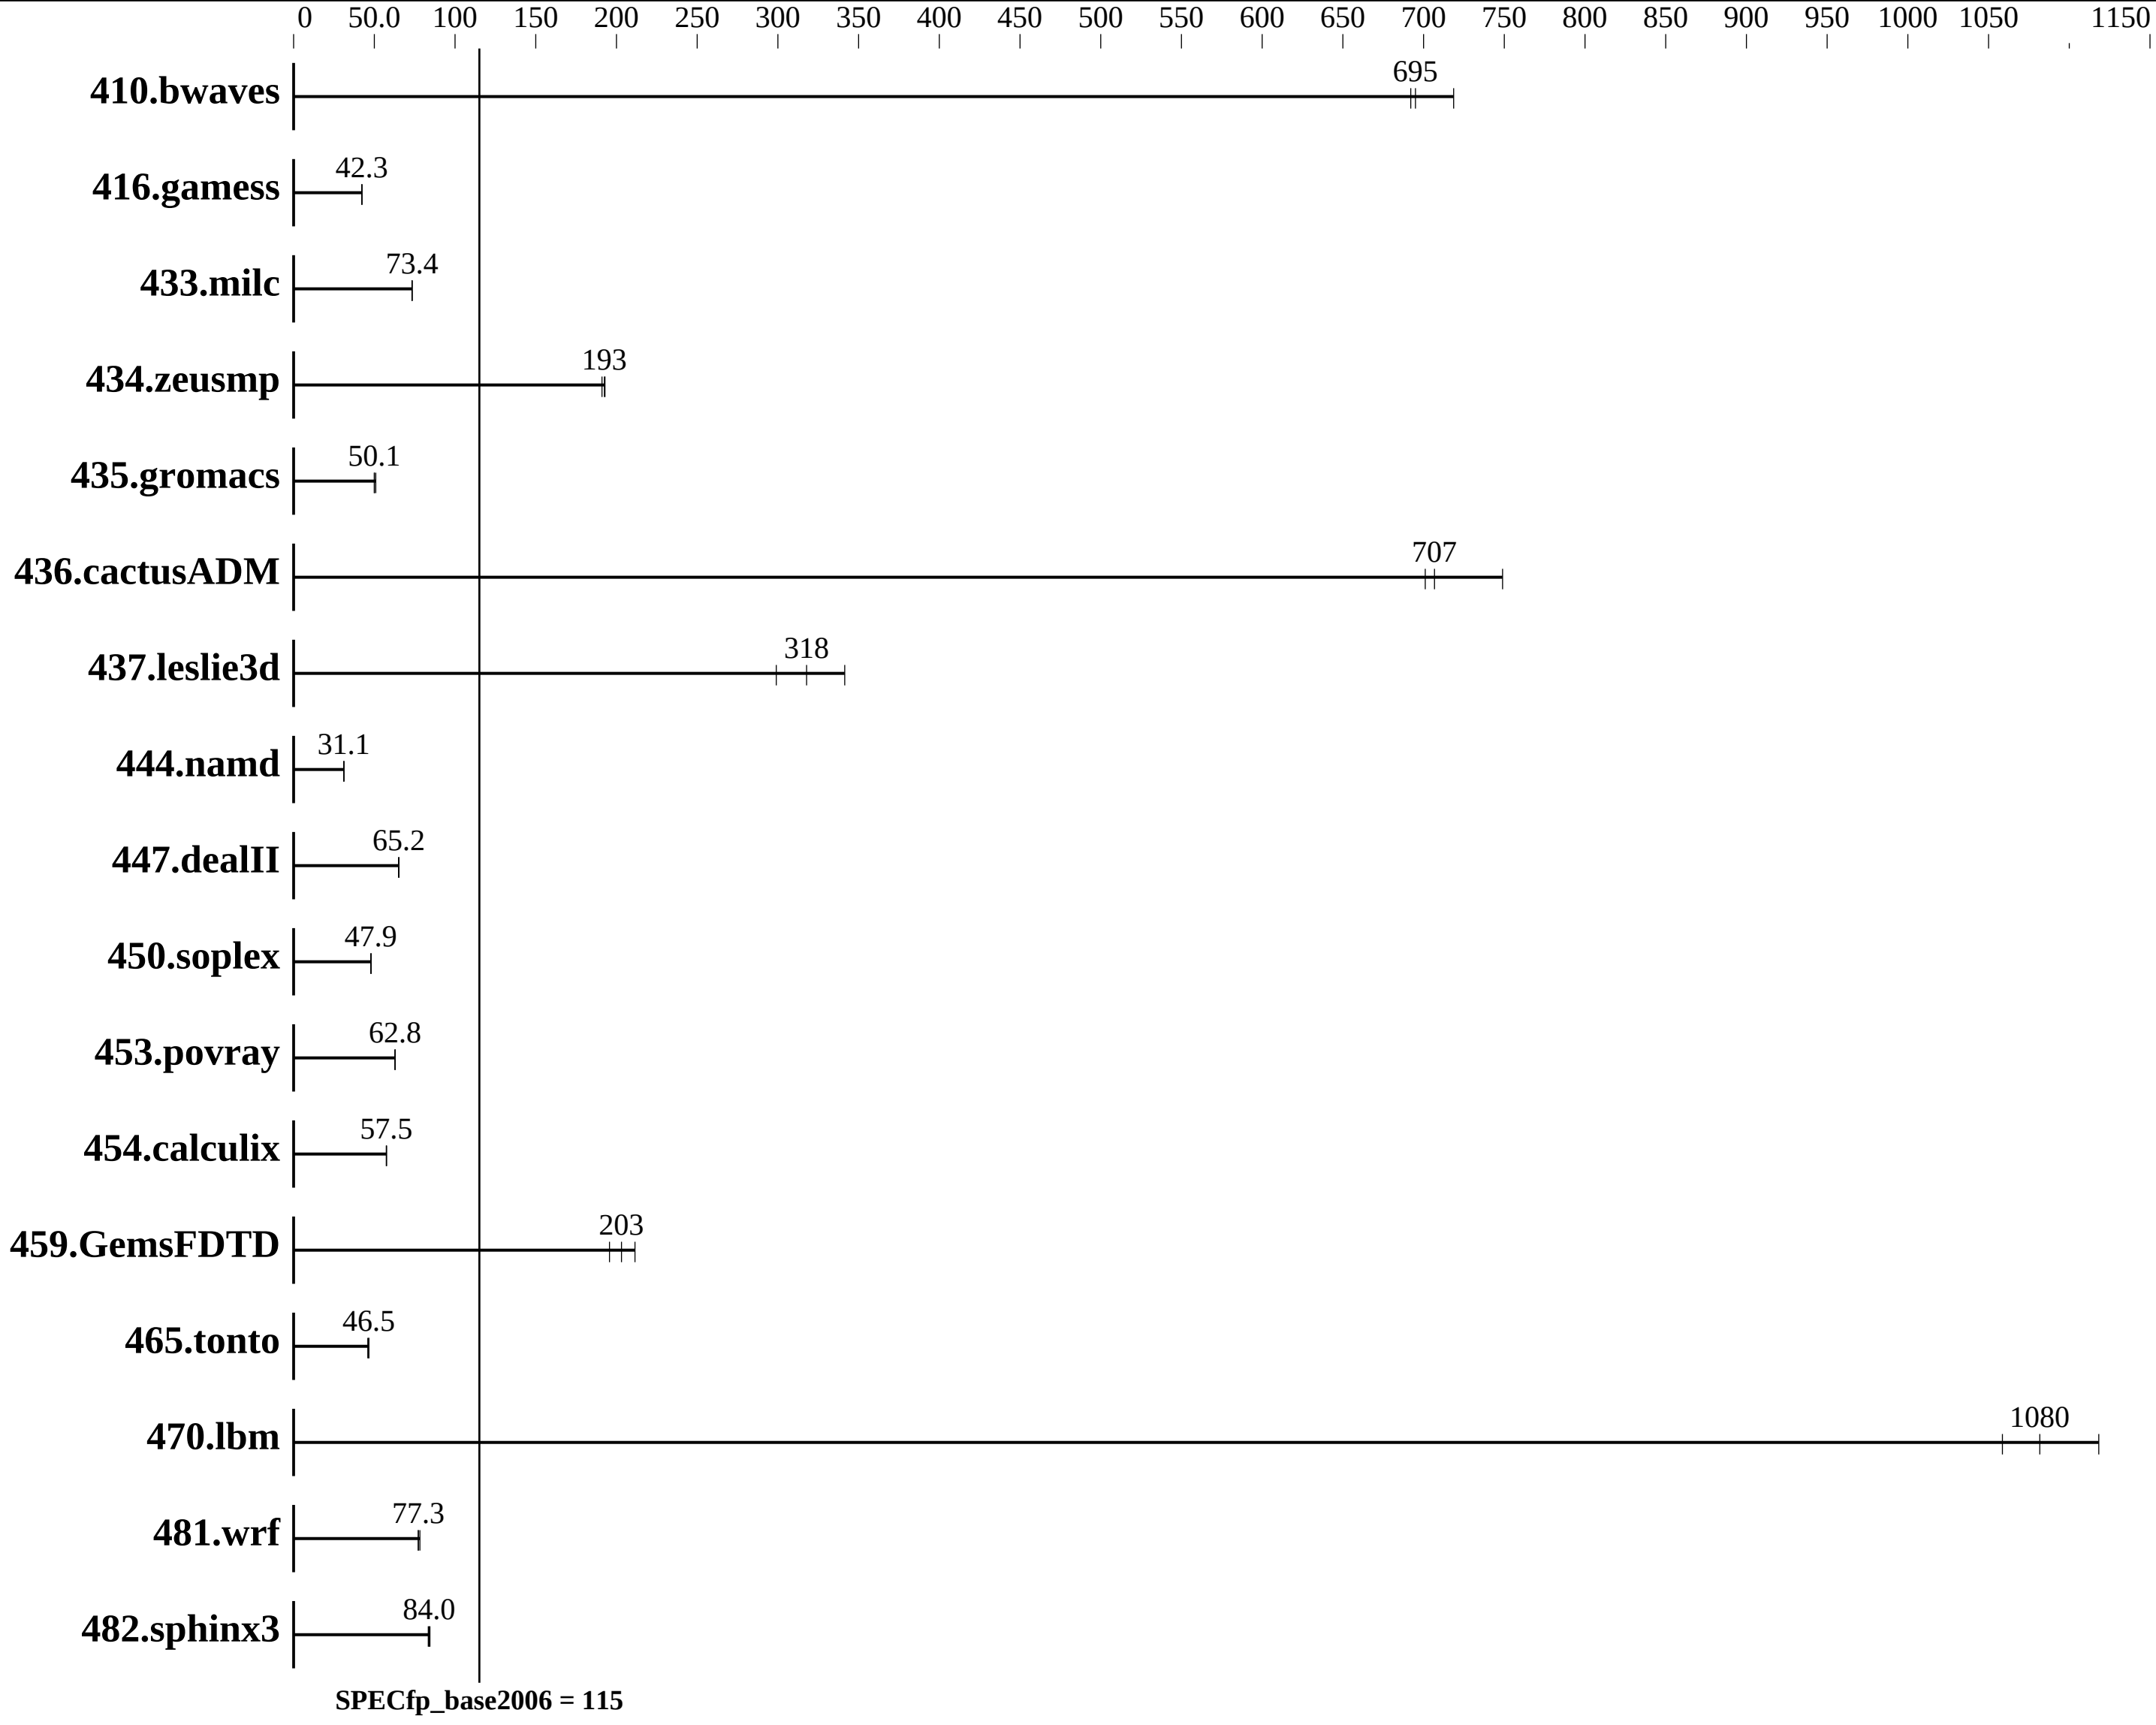

Hardware

CPU Name:	Intel Xeon E7-8891 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	tmpfs

Continued on next page

L3 Cache:	60 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	2 x 600GB SAS, 10K RPM
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	18.9	719	**19.6**	**695**	19.6	692						
416.gamess	463	42.3	**463**	**42.3**	463	42.3						
433.milc	**125**	**73.4**	125	73.4	125	73.3						
434.zeusmp	**47.3**	**193**	47.2	193	47.6	191						
435.gromacs	**143**	**50.1**	143	50.0	140	50.9						
436.cactusADM	17.0	701	16.0	749	**16.9**	**707**						
437.leslie3d	**29.6**	**318**	27.5	341	31.4	299						
444.namd	**258**	**31.1**	258	31.1	258	31.1						
447.dealII	175	65.2	**175**	**65.2**	176	65.0						
450.soplex	174	48.0	**174**	**47.9**	174	47.9						
453.povray	84.5	62.9	84.7	62.8	**84.7**	**62.8**						
454.calculix	143	57.5	**143**	**57.5**	144	57.4						
459.GemsFDTD	50.2	211	54.2	196	**52.2**	**203**						
465.tonto	211	46.6	**211**	**46.5**	214	45.9						
470.lbm	12.3	1120	**12.7**	**1080**	13.0	1060						
481.wrf	145	77.2	**145**	**77.3**	143	78.2						
482.sphinx3	**232**	**84.0**	234	83.4	231	84.4						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
 Stack size set to unlimited using "ulimit -s unlimited"
 Turbo mode set with:
  cpupower -c all frequency-set -g performance
Tmpfs filesystem can be set with:
 mkdir /home/shm
 mount -t tmpfs -o size=100g,rw tmpfs /home/shm
```

Platform Notes

```
 BIOS configuration:
 Set Power Efficiency Mode to Custom
 Set Lock_step to disabled
 Baseboard Management Controller used to adjust the fan speed to 100%
```

Continued on next page

Platform Notes (Continued)

```
Set C-State to C6(Retention)
Set Hyper-Threading to disabled
Sysinfo program /home/shm/spec/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Tue May 17 07:54:58 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8891 v4 @ 2.80GHz
      4 "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 10
      physical 0: cores 5 9 10 11 13 18 24 26 28 29
      physical 1: cores 5 9 10 11 13 18 24 26 28 29
      physical 2: cores 5 9 10 11 13 18 24 26 28 29
      physical 3: cores 5 9 10 11 13 18 24 26 28 29
   cache size : 61440 KB

From /proc/meminfo
   MemTotal:       528282080 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
   EDT 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 17 04:01

SPEC is set to: /home/shm/spec
   Filesystem     Type   Size  Used Avail Use% Mounted on
```

Continued on next page

Platform Notes (Continued)

```
    tmpfs          tmpfs  100G  5.3G   95G   6% /home/shm
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS American Megatrends Inc. 5.11 02/05/2016
   Memory:
    64x NO DIMM NO DIMM
    32x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

 (End of data from sysinfo program)
 Regarding the sysinfo display about the memory installed, the correct amount of
 memory is 512 GB and the dmidecode description should have two lines reading as:
 64x NO DIMM NO DIMM
 32x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/shm/spec/libs/32:/home/shm/spec/libs/64:/home/shm/spec/sh"
OMP_NUM_THREADS = "40"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
    `icc   -m64`

C++ benchmarks:
    `icpc  -m64`

Fortran benchmarks:
    `ifort -m64`

Benchmarks using both Fortran and C:
    `icc   -m64 ifort -m64`

Huawei

Huawei RH5885H V3 (Intel Xeon E7-8891 v4)

SPECfp2006 = Not Run

SPECfp_base2006 = 115

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2016
Hardware Availability: Jun-2016
Software Availability: Oct-2015

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-HSW-RevG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-HSW-RevG.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 13:53:37 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 June 2016.