SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL120 Gen9
(2.20 GHz, Intel Xeon E5-2699 v4)

SPECint®_rate2006 = 893

SPECint_rate_base2006 = 860

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

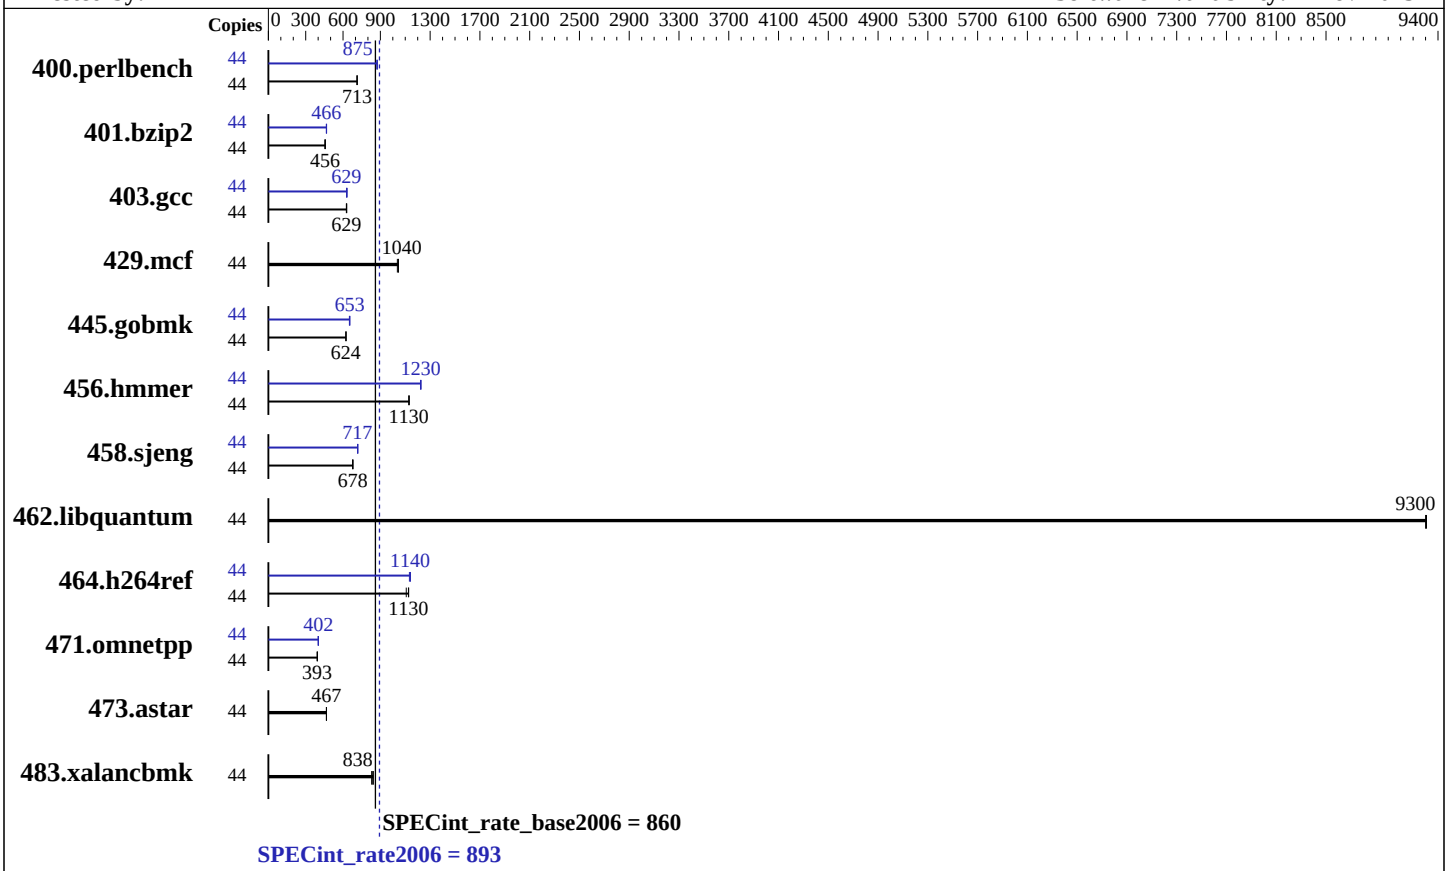

Hardware

CPU Name:	Intel Xeon E5-2699 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	22 cores, 1 chip, 22 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	55 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (4 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	2 x 400 GB SAS SSD, RAID 1
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) Kernel 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	44	**603**	**713**	603	713	602	714	44	493	872	**492**	**875**	491	875
401.bzip2	44	933	455	**932**	**456**	927	458	44	907	468	911	466	**910**	**466**
403.gcc	44	**563**	**629**	563	629	565	627	44	560	633	**563**	**629**	564	628
429.mcf	44	387	1040	384	1040	**384**	**1040**	44	387	1040	384	1040	**384**	**1040**
445.gobmk	44	**740**	**624**	740	624	740	623	44	705	655	709	651	**706**	**653**
456.hmmer	44	364	1130	363	1130	**363**	**1130**	44	336	1220	**335**	**1230**	335	1230
458.sjeng	44	783	680	786	678	**785**	**678**	44	**742**	**717**	740	719	742	717
462.libquantum	44	**98.0**	**9300**	98.0	9310	98.0	9300	44	**98.0**	**9300**	98.0	9310	98.0	9300
464.h264ref	44	**865**	**1130**	864	1130	879	1110	44	853	1140	859	1130	**854**	**1140**
471.omnetpp	44	**700**	**393**	699	393	700	393	44	**685**	**402**	687	400	685	402
473.astar	44	**662**	**467**	663	466	661	467	44	**662**	**467**	663	466	661	467
483.xalancbmk	44	360	844	366	830	**362**	**838**	44	360	844	366	830	**362**	**838**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
  HP Power Profile set to Custom
  HP Power Regulator to HP Static High Performance Mode
  Minimum Processor Idle Power Core C-State set to C1E State
  Minimum Processor Idle Power Package C-State set to No Package State
  Collaborative Power Control set to Disabled
  Thermal Configuration set to Maximum Cooling
  Processor Power and Utilization Monitoring set to Disabled
  Memory Refresh Rate set to 1x Refresh
  Intel Hyperthreading set to Enabled
  QPI Snoop Configuration set to Cluster on Die
```

Continued on next page

Platform Notes (Continued)

```
Sysinfo program /cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Thu May 12 17:01:12 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
      1 "physical id"s (chips)
      44 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 22
      siblings  : 44
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
      28
   cache size : 28160 KB

From /proc/meminfo
   MemTotal:       131597108 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
   EDT 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 12 11:37

SPEC is set to: /cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   461G  9.8G  451G   3% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
```

Continued on next page

Platform Notes (Continued)

```
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS HP P86 02/22/2016
    Memory:
     4x UNKNOWN NOT AVAILABLE
     4x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

  (End of data from sysinfo program)
  Regarding the sysinfo display about the memory installed, the correct amount of
  memory is 128 GB and the dmidecode description should have one line reading as:
  4x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jun 1 19:11:12 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 June 2016.