SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL170r Gen9
(2.40 GHz, Intel Xeon E5-2680 v4)

SPECfp®2006 = 112

SPECfp_base2006 = 106

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Dec-2015

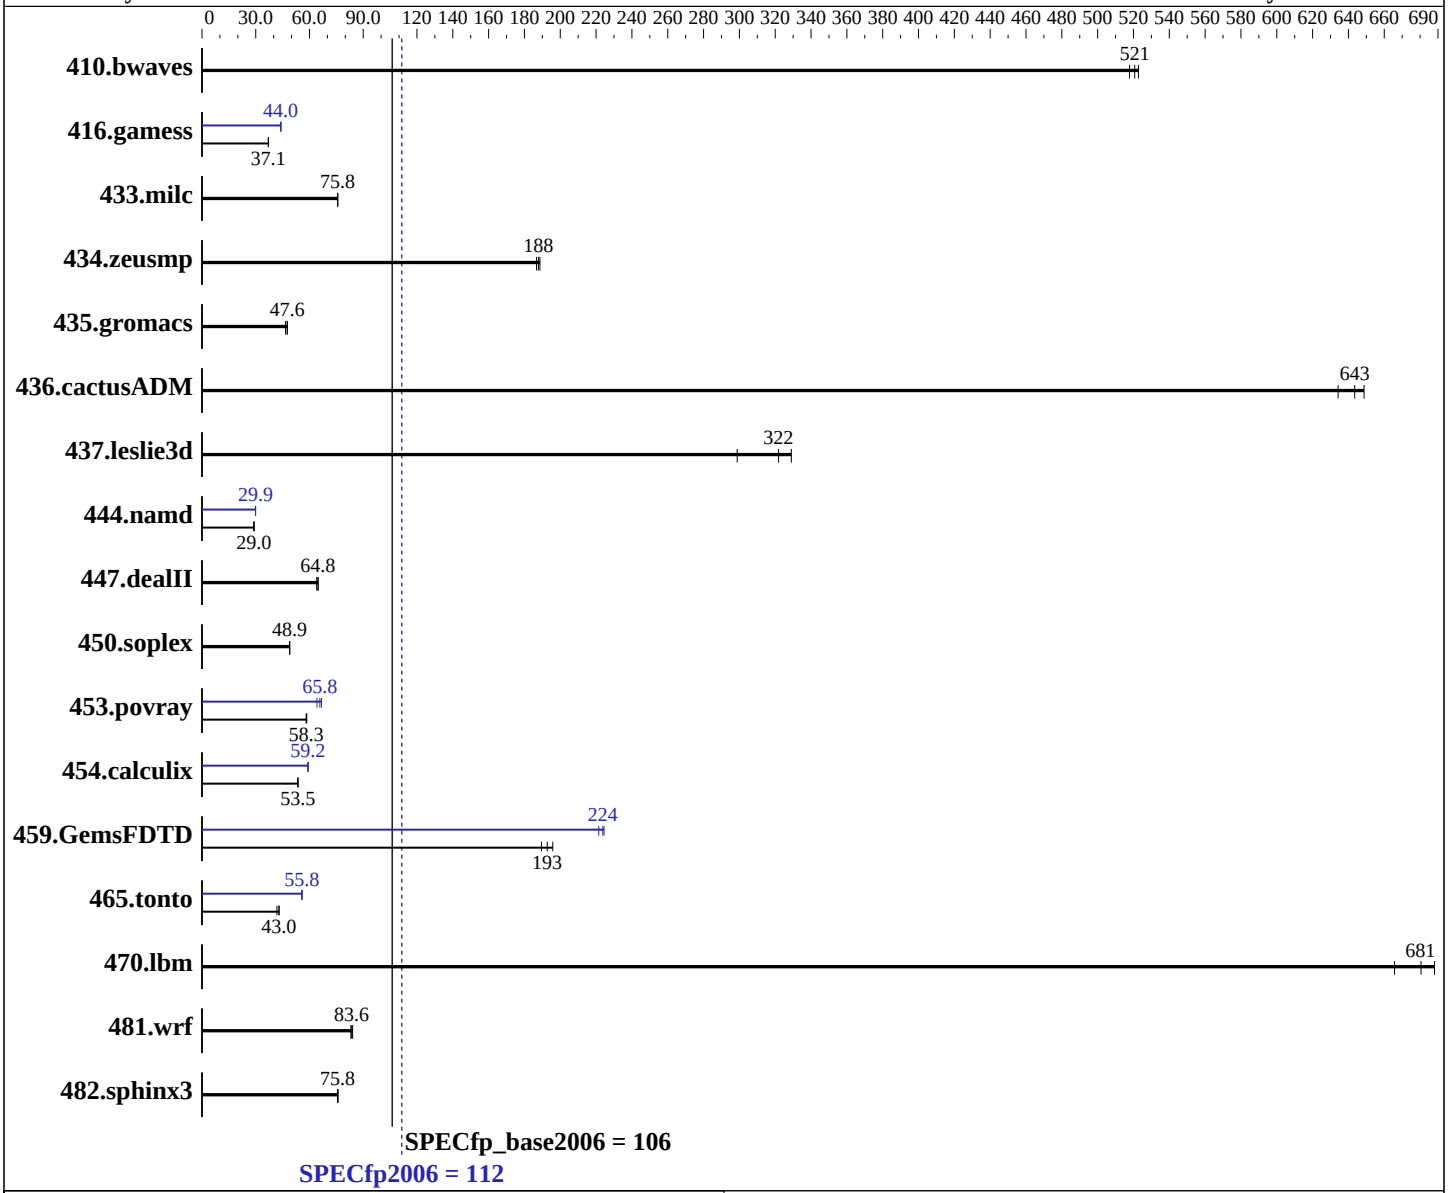

Hardware

CPU Name:	Intel Xeon E5-2680 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) Kernel 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL170r Gen9
(2.40 GHz, Intel Xeon E5-2680 v4)

SPECfp2006 = 112

SPECfp_base2006 = 106

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Dec-2015

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 2 x 800 GB SSD, RAID 1
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**26.1**	**521**	26.0	523	26.2	518	**26.1**	**521**	26.0	523	26.2	518
416.gamess	**528**	**37.1**	527	37.1	529	37.0	**445**	**44.0**	445	44.0	445	44.0
433.milc	121	75.8	**121**	**75.8**	121	75.7	121	75.8	**121**	**75.8**	121	75.7
434.zeusmp	48.2	189	48.7	187	**48.5**	**188**	48.2	189	48.7	187	**48.5**	**188**
435.gromacs	150	47.6	**150**	**47.6**	153	46.6	150	47.6	**150**	**47.6**	153	46.6
436.cactusADM	18.4	649	18.8	634	**18.6**	**643**	18.4	649	18.8	634	**18.6**	**643**
437.leslie3d	31.5	299	**29.2**	**322**	28.6	329	31.5	299	**29.2**	**322**	28.6	329
444.namd	276	29.0	**276**	**29.0**	276	29.0	268	29.9	**268**	**29.9**	268	29.9
447.dealII	**177**	**64.8**	179	64.0	177	64.8	**177**	**64.8**	179	64.0	177	64.8
450.soplex	171	48.9	170	49.0	**171**	**48.9**	171	48.9	170	49.0	**171**	**48.9**
453.povray	91.5	58.2	91.0	58.5	**91.3**	**58.3**	82.9	64.2	**80.9**	**65.8**	79.8	66.7
454.calculix	**154**	**53.5**	154	53.7	155	53.4	139	59.3	**139**	**59.2**	140	59.1
459.GemsFDTD	54.2	196	56.0	189	**55.0**	**193**	47.9	221	**47.4**	**224**	47.3	224
465.tonto	229	43.0	**229**	**43.0**	235	41.8	177	55.6	176	55.9	**176**	**55.8**
470.lbm	**20.2**	**681**	20.6	666	20.0	688	**20.2**	**681**	20.6	666	20.0	688
481.wrf	133	84.1	134	83.1	**134**	**83.6**	133	84.1	134	83.1	**134**	**83.6**
482.sphinx3	258	75.6	257	76.0	**257**	**75.8**	258	75.6	257	76.0	**257**	**75.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS Configuration:
   Intel Hyperthreading set to Disabled
   HP Power Profile set to Custom
   HP Power Regulator to HP Static High Performance Mode
   Minimum Processor Idle Power Core State set to C6 State
   Minimum Processor Idle Power Package State set to No Package State
   Energy/Performance Bias set to Maximum Performance
   Collaborative Power Control set to Disabled
```

Continued on next page

Platform Notes (Continued)

```
      Thermal Configuration set so Maximum Cooling
      Processor Power and Utilization Monitoring set to Disabled
      Memory Refresh Rate set to 1x Refresh

    Sysinfo program /cpu16/config/sysinfo.rev6914
    $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
    running on apollo3114 Tue May  3 13:08:22 2016

    This section contains SUT (System Under Test) info as seen by
    some common utilities.  To remove or add to this section, see:
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2680 v4@ 2.40GHz
          2 "physical id"s (chips)
          28 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 14
          siblings  : 14
          physical 0: cores 0 2 4 5 6 8 9 10 11 12 13 14
          physical 1: cores 0 2 4 5 6 8 9 10 11 12 13 14
       cache size : 35840 KB

    From /proc/meminfo
       MemTotal:       132039652 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       SuSE-release:
          SUSE Linux Enterprise Server 12 (x86_64)
          VERSION = 12
          PATCHLEVEL = 1
          # This file is deprecated and will be removed in a future service pack or
          release.
          # Please check /etc/os-release for details about this release.
       os-release:
          NAME="SLES"
          VERSION="12-SP1"
          VERSION_ID="12.1"
          PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
          ID="sles"
          ANSI_COLOR="0;32"
          CPE_NAME="cpe:/o:suse:sles:12:sp1"

    uname -a:
       Linux apollo3114 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
       (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 May 3 07:51
```

Continued on next page

Platform Notes (Continued)

```
SPEC is set to: /cpu16
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda1      ext4  734G  211G  487G  31% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS HP U14 02/22/2016
  Memory:
   8x HP 809081-081 16 GB 2 rank 2400 MHz
   8x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 128 GB and the dmidecode description should have one line reading as:
8x HP 809081-081 16 GB 2 rank 2400 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/cpu16/libs/32:/cpu16/libs/64:/cpu16/sh"
OMP_NUM_THREADS = "28"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-unroll2` `-inline-level=0 -opt-prefetch -parallel`

465.tonto: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-inline-calloc` `-opt-malloc-options=3 -auto -unroll4`

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jun 1 19:11:15 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 June 2016.