



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## M Computers s.r.o.

### SPECfp®\_rate2006 = 682

### HPC S2600WT2R (Intel Xeon E5-2630 v4, 2.2 GHz)

### SPECfp\_rate\_base2006 = 668

CPU2006 license: 4204


Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

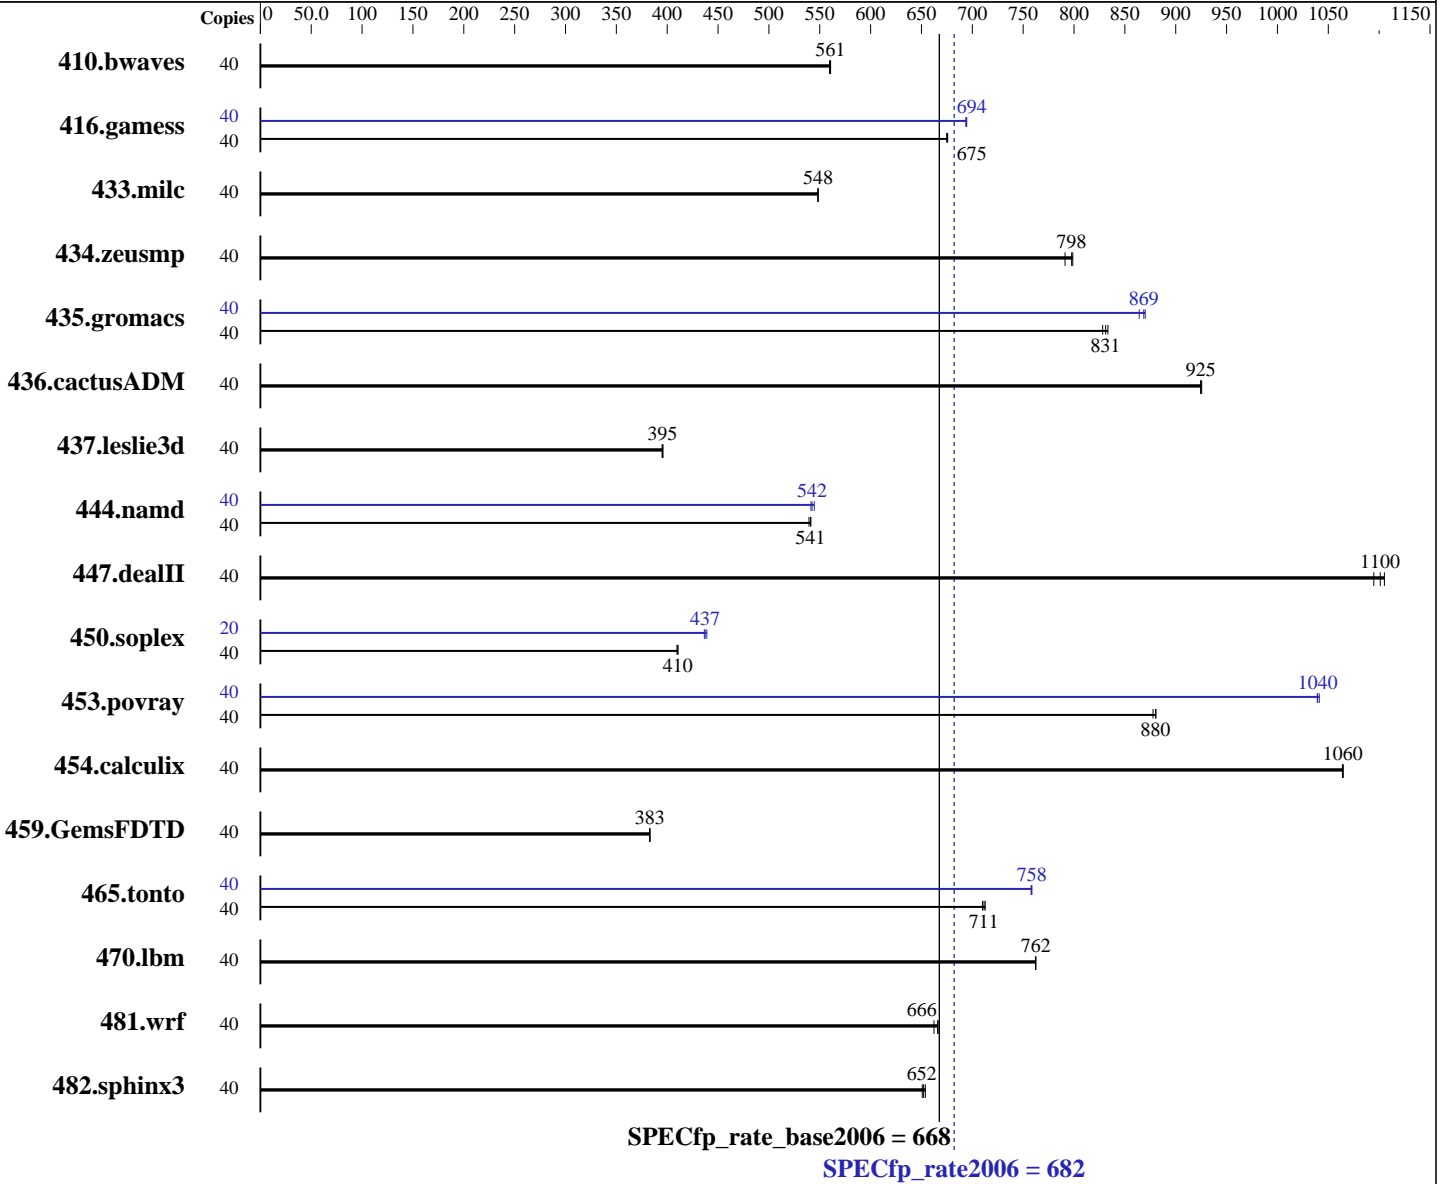

### Hardware

CPU Name: Intel Xeon E5-2630 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: CentOS Linux release 7.2.1511 (Core)  
 3.10.0-327.18.2.el7.x86\_64  
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp\_rate2006 = 682

HPC S2600WT2R (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp\_rate\_base2006 = 668

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)  
Disk Subsystem: 100 GB SATA SSD  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	40	971	560	<b>970</b>	<b>561</b>	970	561	40	971	560	<b>970</b>	<b>561</b>	970	561		
416.gamess	40	1159	676	1160	675	<b>1160</b>	<b>675</b>	40	1128	695	1129	694	<b>1129</b>	<b>694</b>		
433.milc	40	670	548	<b>670</b>	<b>548</b>	670	548	40	670	548	<b>670</b>	<b>548</b>	670	548		
434.zeusmp	40	456	799	<b>456</b>	<b>798</b>	460	791	40	456	799	<b>456</b>	<b>798</b>	460	791		
435.gromacs	40	<b>344</b>	<b>831</b>	345	828	343	833	40	328	870	331	864	<b>329</b>	<b>869</b>		
436.cactusADM	40	517	924	<b>517</b>	<b>925</b>	516	926	40	517	924	<b>517</b>	<b>925</b>	516	926		
437.leslie3d	40	<b>951</b>	<b>395</b>	952	395	950	396	40	<b>951</b>	<b>395</b>	952	395	950	396		
444.namd	40	<b>593</b>	<b>541</b>	593	541	595	539	40	<b>591</b>	<b>542</b>	593	541	589	545		
447.dealII	40	<b>416</b>	<b>1100</b>	414	1110	418	1090	40	<b>416</b>	<b>1100</b>	414	1110	418	1090		
450.soplex	40	813	411	814	410	<b>813</b>	<b>410</b>	20	<b>381</b>	<b>437</b>	382	437	380	439		
453.povray	40	242	881	242	878	<b>242</b>	<b>880</b>	40	205	1040	<b>205</b>	<b>1040</b>	204	1040		
454.calculix	40	310	1060	310	1060	<b>310</b>	<b>1060</b>	40	310	1060	310	1060	<b>310</b>	<b>1060</b>		
459.GemsFDTD	40	1108	383	<b>1108</b>	<b>383</b>	1108	383	40	1108	383	<b>1108</b>	<b>383</b>	1108	383		
465.tonto	40	554	710	<b>553</b>	<b>711</b>	552	713	40	519	759	<b>519</b>	<b>758</b>	519	758		
470.lbm	40	<b>721</b>	<b>762</b>	721	762	721	762	40	<b>721</b>	<b>762</b>	721	762	721	762		
481.wrf	40	671	666	<b>671</b>	<b>666</b>	675	662	40	671	666	<b>671</b>	<b>666</b>	675	662		
482.sphinx3	40	1198	651	1192	654	<b>1196</b>	<b>652</b>	40	1198	651	1192	654	<b>1196</b>	<b>652</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp\_rate2006 = 682

HPC S2600WT2R (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp\_rate\_base2006 = 668

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

## Platform Notes

### BIOS Configuration:

CPU and Power Performance Policy = Performance  
Set Fan Profile = Performance  
Fan PWM Offset = 100

Sysinfo program /spec/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (e8f6083e070337c86105af7c45f99758)

running on ruth Sat Jun 11 16:15:45 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2630 v4 @ 2.20GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

### From /proc/meminfo

```
MemTotal: 263857524 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

### From /etc/\*release\* /etc/\*version\*

```
centos-release: CentOS Linux release 7.2.1511 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.2 (Source)
os-release:
NAME="CentOS Linux"
VERSION="7 (Core)"
ID="centos"
ID_LIKE="rhel fedora"
VERSION_ID="7"
PRETTY_NAME="CentOS Linux 7 (Core)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.2.1511 (Core)
system-release: CentOS Linux release 7.2.1511 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

### uname -a:

```
Linux ruth 3.10.0-327.18.2.el7.x86_64 #1 SMP Thu May 12 11:03:55 UTC 2016
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 11 16:14

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp\_rate2006 = 682

HPC S2600WT2R (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp\_rate\_base2006 = 668

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

## Platform Notes (Continued)

SPEC is set to: /spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	xfs	100G	9.1G	91G	10%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS SE5C610.86B.01.01.0016.033120161139 03/31/2016

Memory:

16x Kinston 9965662-004.A00G 16 GB 2 rank 2400 MHz, configured at 2134 MHz  
8x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/opt/intel/compilers\_and\_libraries\_2016.2.181/linux/compiler/lib/intel64\_lin"

Binaries compiled on a system with 2x Xeon E5-2630 v4 CPU + 256GB memory using CentOS 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp\_rate2006 = 682

HPC S2600WT2R (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp\_rate\_base2006 = 668

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp\_rate2006 = 682

HPC S2600WT2R (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp\_rate\_base2006 = 668

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp\_rate2006 = 682

HPC S2600WT2R (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp\_rate\_base2006 = 668

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/MComputers-Platform-Settings-V1.2-revA.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/MComputers-Platform-Settings-V1.2-revA.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp\_rate2006 = 682

HPC S2600WT2R (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp\_rate\_base2006 = 668

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jun 28 17:29:37 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 June 2016.