SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC830 (Intel Xeon E5-4667 v4, 2.20 GHz)

SPECfp®_rate2006 = 1860

SPECfp_rate_base2006 = 1800

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2016
Hardware Availability: Jun-2016
Software Availability: Mar-2016

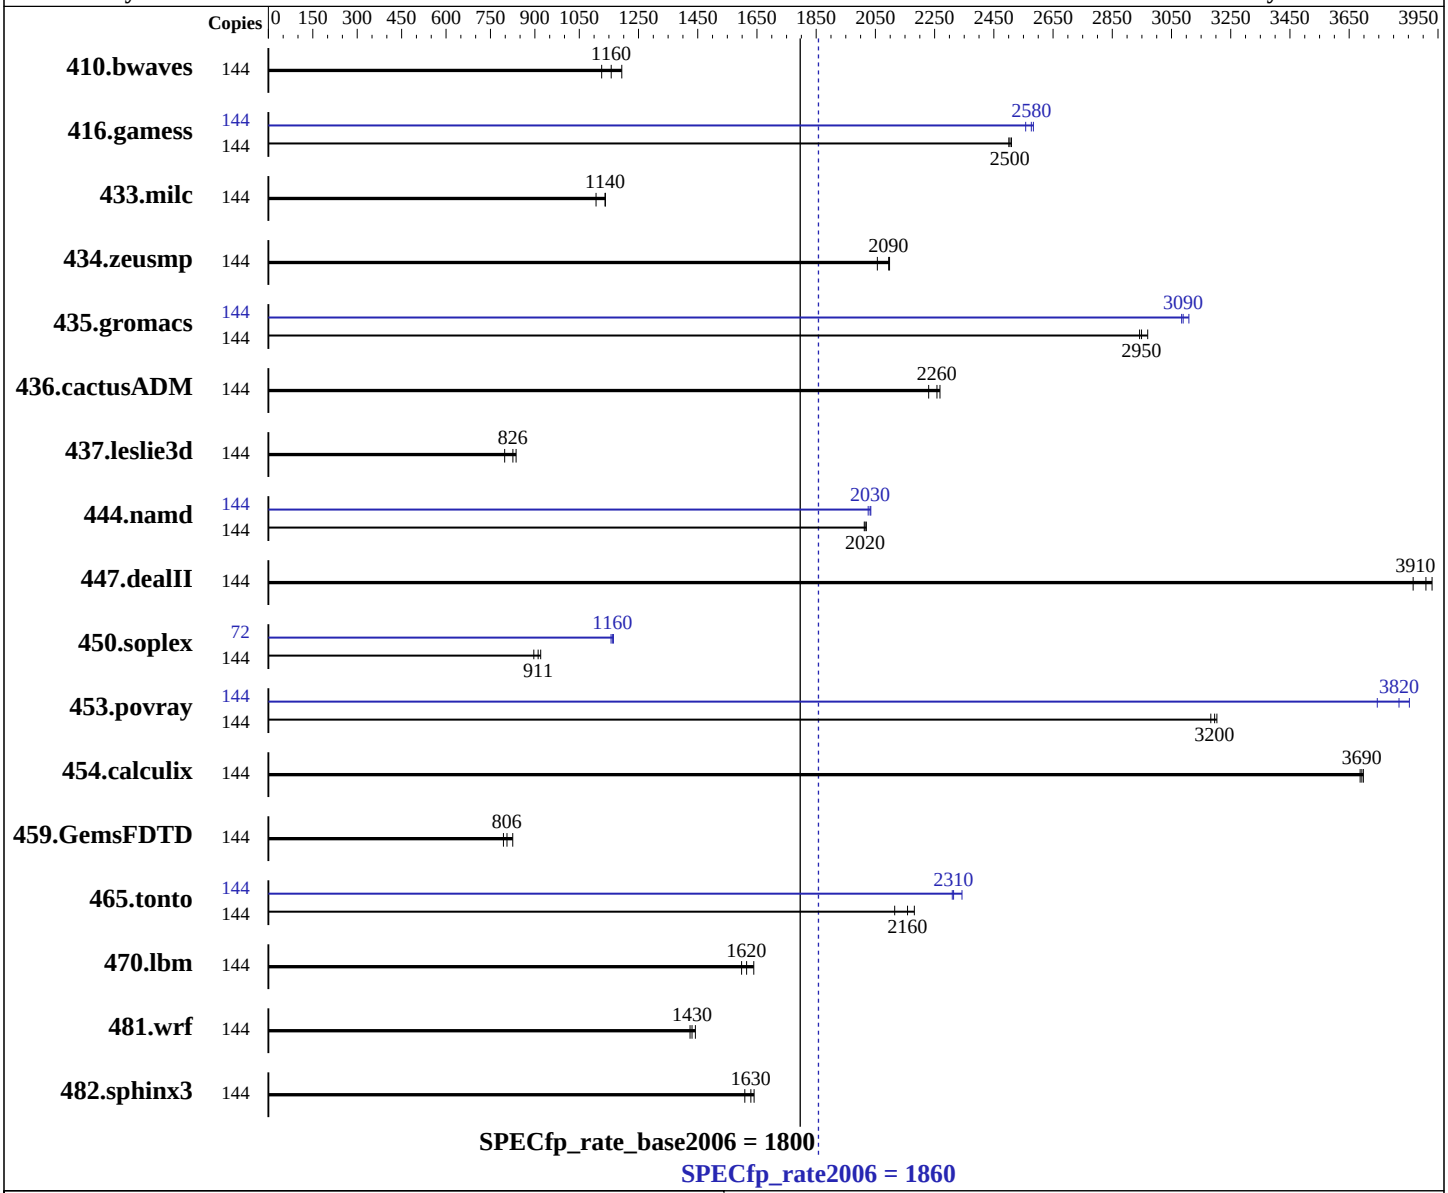

Hardware

CPU Name:	Intel Xeon E5-4667 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	72 cores, 4 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler:	C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	btrfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC830 (Intel Xeon E5-4667 v4, 2.20 GHz)

SPECfp_rate2006 = 1860

SPECfp_rate_base2006 = 1800

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2016
Hardware Availability: Jun-2016
Software Availability: Mar-2016

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx8 PC4-2400T-R)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	144	1739	1130	**1690**	**1160**	1640	1190	144	1739	1130	**1690**	**1160**	1640	1190
416.gamess	144	**1126**	**2500**	1124	2510	1128	2500	144	**1094**	**2580**	1102	2560	1091	2580
433.milc	144	1195	1110	1161	1140	**1163**	**1140**	144	1195	1110	1161	1140	**1163**	**1140**
434.zeusmp	144	637	2060	**626**	**2090**	625	2100	144	637	2060	**626**	**2090**	625	2100
435.gromacs	144	346	2970	**349**	**2950**	349	2940	144	331	3110	333	3080	**333**	**3090**
436.cactusADM	144	772	2230	759	2270	**762**	**2260**	144	772	2230	759	2270	**762**	**2260**
437.leslie3d	144	1696	798	1618	837	**1639**	**826**	144	1696	798	1618	837	**1639**	**826**
444.namd	144	574	2010	572	2020	**573**	**2020**	144	568	2030	**568**	**2030**	570	2030
447.dealII	144	426	3870	419	3930	**421**	**3910**	144	426	3870	419	3930	**421**	**3910**
450.soplex	144	1340	896	**1318**	**911**	1306	920	72	519	1160	515	1170	**517**	**1160**
453.povray	144	**240**	**3200**	241	3180	239	3200	144	205	3740	**201**	**3820**	199	3850
454.calculix	144	321	3700	**322**	**3690**	322	3690	144	321	3700	**322**	**3690**	322	3690
459.GemsFDTD	144	1925	794	**1896**	**806**	1851	825	144	1925	794	**1896**	**806**	1851	825
465.tonto	144	670	2120	650	2180	**656**	**2160**	144	613	2310	**612**	**2310**	605	2340
470.lbm	144	1238	1600	**1225**	**1620**	1207	1640	144	1238	1600	**1225**	**1620**	1207	1640
481.wrf	144	**1124**	**1430**	1130	1420	1115	1440	144	**1124**	**1430**	1130	1420	1115	1440
482.sphinx3	144	**1722**	**1630**	1744	1610	1711	1640	144	**1722**	**1630**	1744	1610	1711	1640

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Snoop Mode set to Cluster on Die
Virtualization Technology disabled
```

Continued on next page

Platform Notes (Continued)

```
System Profile set to custom
CPU Performance set to Hardware P States
C States set to Autonomous
C1E disabled
Energy Efficient Turbo disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Balanced Performance
Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-4pvp Tue Apr 26 22:16:03 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-4667 v4 @ 2.20GHz
      4 "physical id"s (chips)
      144 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 18
      siblings  : 36
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
   cache size : 46080 KB

From /proc/meminfo
   MemTotal:       529326748 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
```

Continued on next page

Platform Notes (Continued)

```
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp1"

   uname -a:
      Linux linux-4pvp 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
      (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Apr 26 09:30

   SPEC is set to: /root/cpu2006-1.2
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda2      xfs   271G   12G  260G   5% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS Dell Inc. 2.0.2 04/14/2016
     Memory:
      5x 002C00B3002C 18ASF2G72PDZ-2G3A1 16 GB 2 rank 2400 MHz
      19x 00AD00B300AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz
      8x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz
      16x Not Specified Not Specified

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

  Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB
  memory using RedHat EL 7.2 glibc 2.17
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
     icc   -m64
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 28 17:29:54 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 June 2016.