SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520H (Intel Xeon E5-2650 v4)

SPECfp®2006 = 109

SPECfp_base2006 = 104

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Jun-2016
Hardware Availability: Apr-2016
Software Availability: Nov-2015

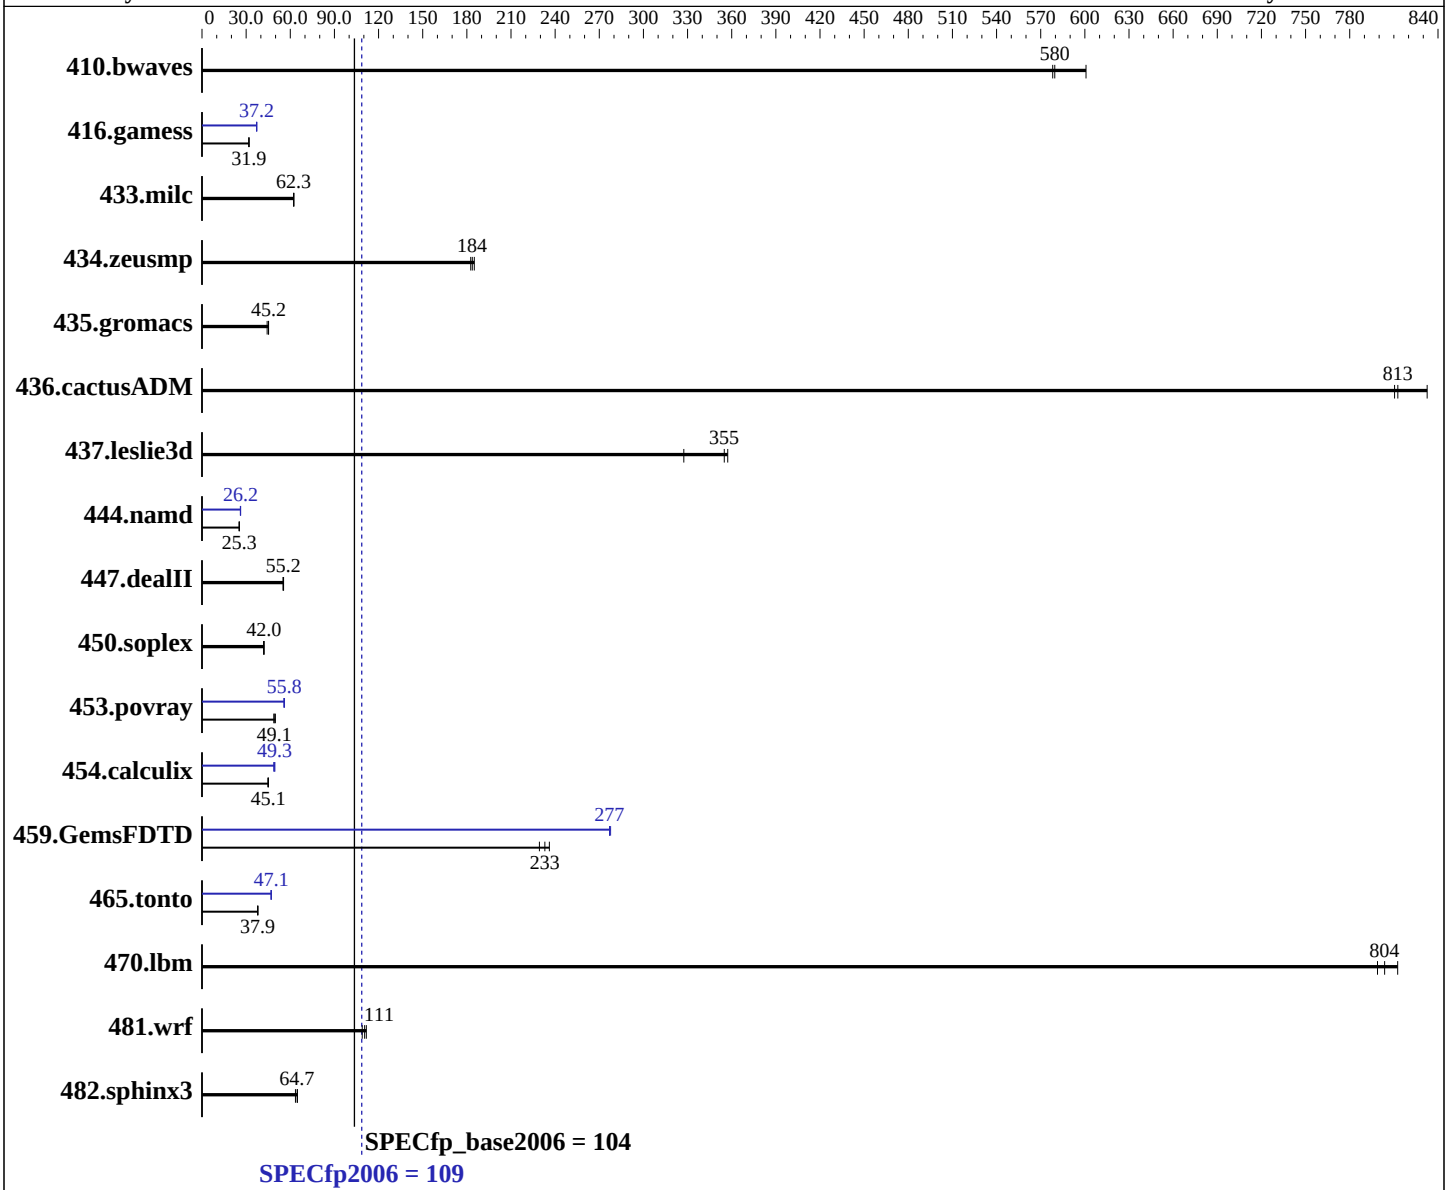

Hardware

CPU Name:	Intel Xeon E5-2650 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.0 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.0 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520H (Intel Xeon E5-2650 v4)

SPECfp2006 = 109

SPECfp_base2006 = 104

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Jun-2016
Hardware Availability: Apr-2016
Software Availability: Nov-2015

L3 Cache:	30 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other Cache:	None	Base Pointers:	64-bit
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)	Peak Pointers:	32/64-bit
Disk Subsystem:	2 x 300 GB SAS, 15000 RPM, RAID1	Other Software:	none
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	23.5	578	**23.4**	**580**	22.6	601	23.5	578	**23.4**	**580**	22.6	601
416.gamess	**614**	**31.9**	611	32.0	616	31.8	529	37.0	**527**	**37.2**	525	37.3
433.milc	147	62.3	**147**	**62.3**	147	62.4	147	62.3	**147**	**62.3**	147	62.4
434.zeusmp	**49.5**	**184**	49.8	183	49.2	185	**49.5**	**184**	49.8	183	49.2	185
435.gromacs	**158**	**45.2**	161	44.3	158	45.2	**158**	**45.2**	161	44.3	158	45.2
436.cactusADM	14.7	810	**14.7**	**813**	14.4	833	14.7	810	**14.7**	**813**	14.4	833
437.leslie3d	**26.5**	**355**	28.7	327	26.3	357	**26.5**	**355**	28.7	327	26.3	357
444.namd	**317**	**25.3**	316	25.4	317	25.3	308	26.1	306	26.2	**306**	**26.2**
447.dealII	207	55.2	**207**	**55.2**	206	55.4	207	55.2	**207**	**55.2**	206	55.4
450.soplex	**198**	**42.0**	197	42.2	199	41.9	**198**	**42.0**	197	42.2	199	41.9
453.povray	**108**	**49.1**	109	48.8	107	49.9	**95.3**	**55.8**	95.6	55.7	94.9	56.1
454.calculix	183	45.1	**183**	**45.1**	184	44.8	169	48.7	**167**	**49.3**	167	49.5
459.GemsFDTD	46.3	229	44.9	236	**45.5**	**233**	38.2	278	38.3	277	**38.3**	**277**
465.tonto	260	37.8	259	38.0	**259**	**37.9**	210	46.9	**209**	**47.1**	209	47.1
470.lbm	**17.1**	**804**	17.2	799	16.9	813	**17.1**	**804**	17.2	799	16.9	813
481.wrf	103	109	100	112	**101**	**111**	103	109	100	112	**101**	**111**
482.sphinx3	307	63.5	301	64.9	**301**	**64.7**	307	63.5	301	64.9	**301**	**64.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
 Patrol Scrub = Disable
 Per Core P-state = Disable

 Sysinfo program /home/cpu2006/config/sysinfo.rev6914
 $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
 running on rhel722 Mon Jun 13 03:50:57 2016

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2650 v4@ 2.20GHz
          2 "physical id"s (chips)
          48 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 12
          siblings  : 24
          physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
          physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
       cache size : 30720 KB

    From /proc/meminfo
       MemTotal:       527320468 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       os-release:
          NAME="Red Hat Enterprise Linux Server"
          VERSION="7.2 (Maipo)"
          ID="rhel"
          ID_LIKE="fedora"
          VERSION_ID="7.2"
          PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
          ANSI_COLOR="0;31"
          CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
       redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
       system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

    uname -a:
       Linux rhel722 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
       x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Jun 12 21:55

    SPEC is set to: /home/cpu2006
       Filesystem            Type  Size  Used Avail Use% Mounted on
       /dev/mapper/rhel-home xfs   225G   24G  201G  11% /home
    Additional information from dmidecode:

       Warning: Use caution when you interpret this section. The 'dmidecode' program
       reads system data which is "intended to allow hardware to be accurately
       determined", but the intent may not be met, as there are frequent changes to
       hardware, firmware, and the "DMTF SMBIOS" standard.

      BIOS HITACHI 10-00 01/29/2016
      Memory:
```

Continued on next page

Platform Notes (Continued)

```
      8x NO DIMM Unknown
      16x Samsung M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
OMP_NUM_THREADS = "24"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 BladeSymphony BS520H, Hitachi Compute Blade 520H and BladeSymphony BS2500 are electronically equivalent.
 The results have been measured on a Hitachi Compute Blade 520H.
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.6.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.6.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 28 17:31:25 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 June 2016.