



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD550  
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp®\_rate2006 = 423

SPECfp\_rate\_base2006 = 431

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

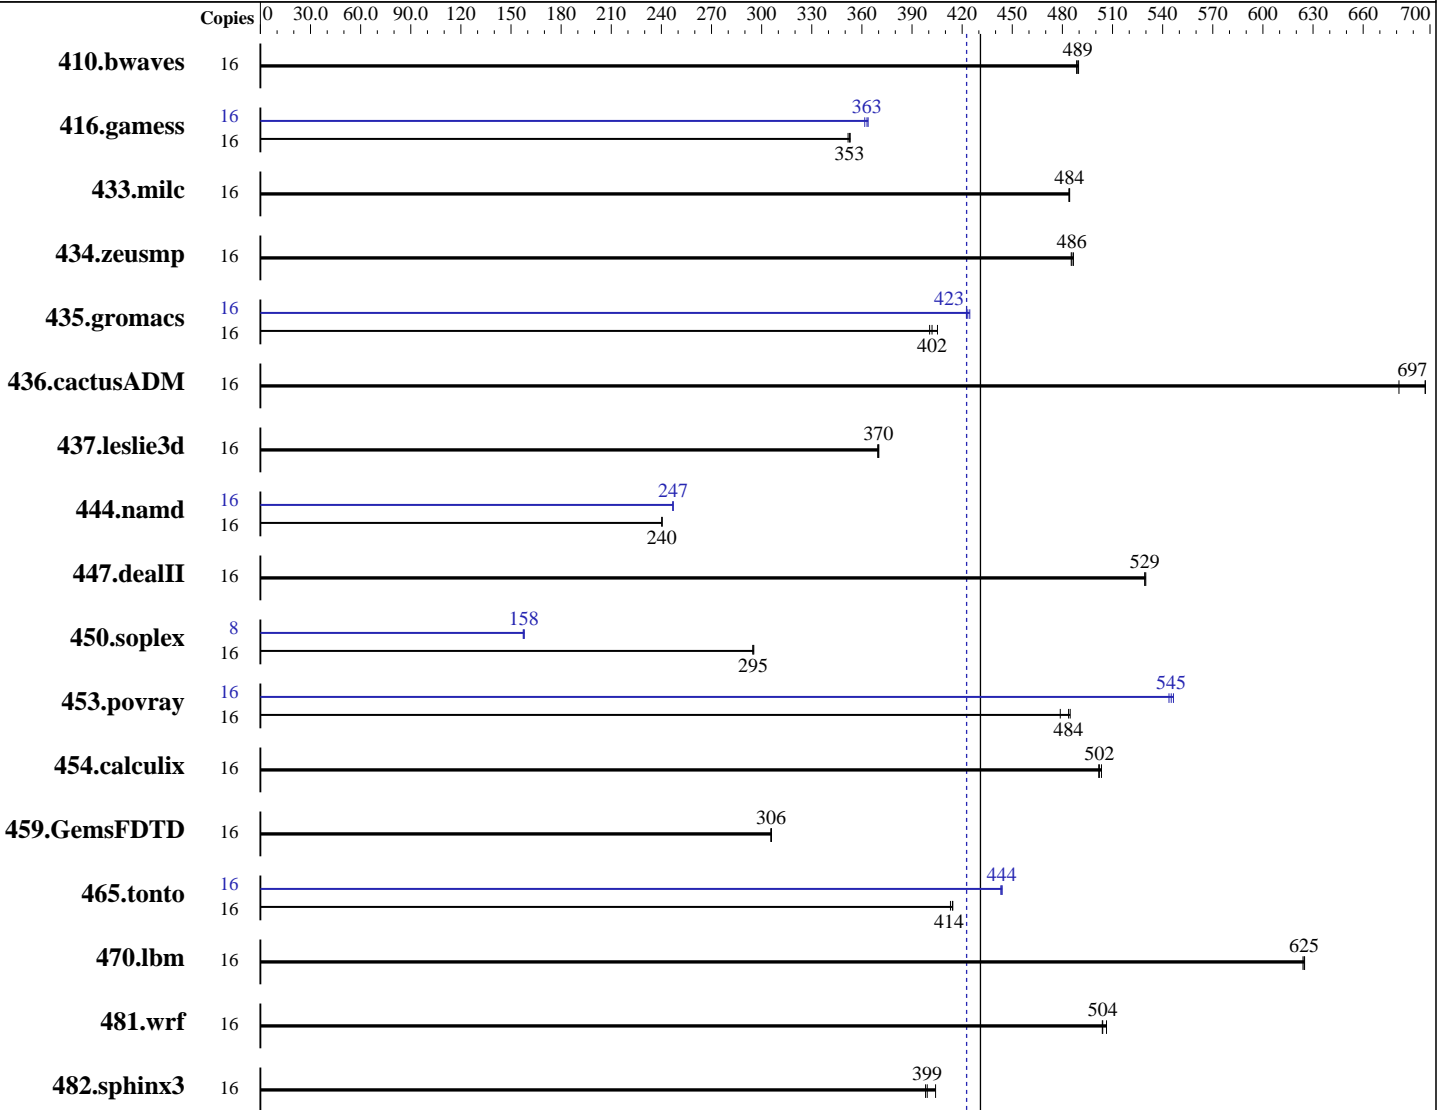

SPECfp\_rate\_base2006 = 431

SPECfp\_rate2006 = 423

### Hardware

CPU Name: Intel Xeon E5-2609 v4  
 CPU Characteristics:  
 CPU MHz: 1700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 Kernel 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = **423**

Lenovo ThinkServer RD550  
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp\_rate\_base2006 = **431**

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	445	488	<b>444</b>	<b>489</b>	444	490	16	445	488	<b>444</b>	<b>489</b>	444	490
416.gamess	16	<b>889</b>	<b>353</b>	887	353	891	352	16	861	364	866	362	<b>863</b>	<b>363</b>
433.milc	16	303	484	<b>303</b>	<b>484</b>	304	484	16	303	484	<b>303</b>	<b>484</b>	304	484
434.zeusmp	16	<b>300</b>	<b>486</b>	299	487	300	485	16	<b>300</b>	<b>486</b>	299	487	300	485
435.gromacs	16	<b>284</b>	<b>402</b>	282	405	285	401	16	<b>270</b>	<b>423</b>	270	423	269	425
436.cactusADM	16	274	697	<b>274</b>	<b>697</b>	281	681	16	274	697	<b>274</b>	<b>697</b>	281	681
437.leslie3d	16	407	369	406	370	<b>406</b>	<b>370</b>	16	407	369	406	370	<b>406</b>	<b>370</b>
444.namd	16	<b>534</b>	<b>240</b>	534	240	534	240	16	<b>520</b>	<b>247</b>	520	247	519	247
447.dealII	16	345	530	346	529	<b>346</b>	<b>529</b>	16	345	530	346	529	<b>346</b>	<b>529</b>
450.soplex	16	452	295	<b>453</b>	<b>295</b>	453	295	8	422	158	<b>423</b>	<b>158</b>	424	157
453.povray	16	178	479	<b>176</b>	<b>484</b>	176	485	16	<b>156</b>	<b>545</b>	156	546	157	544
454.calculix	16	262	503	263	502	<b>263</b>	<b>502</b>	16	262	503	263	502	<b>263</b>	<b>502</b>
459.GemsFDTD	16	556	306	<b>555</b>	<b>306</b>	555	306	16	556	306	<b>555</b>	<b>306</b>	555	306
465.tonto	16	380	414	<b>380</b>	<b>414</b>	381	413	16	<b>355</b>	<b>444</b>	355	444	355	443
470.lbm	16	<b>352</b>	<b>625</b>	352	625	352	624	16	<b>352</b>	<b>625</b>	352	625	352	624
481.wrf	16	<b>355</b>	<b>504</b>	353	506	355	504	16	<b>355</b>	<b>504</b>	353	506	355	504
482.sphinx3	16	783	398	772	404	<b>781</b>	<b>399</b>	16	783	398	772	404	<b>781</b>	<b>399</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 423

Lenovo ThinkServer RD550  
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp\_rate\_base2006 = 431

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

## Platform Notes

### BIOS Configuration:

Cluster On Die set to Disabled  
Early Snoop set to Disabled  
Performance Profile set to Custom  
ClE Support set to Disabled  
Core C3 set to Disabled  
Core C6 set to Disabled  
Thermal Profile set to High Fan Speed  
Memory Power Savings set to Disabled

Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on rd550-mlk-rackA02 Tue May 24 21:21:53 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2609 v4 @ 1.70GHz
 2 "physical id"s (chips)
 16 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 8
siblings       : 8
physical 0:    : cores 0 1 2 3 4 5 6 7
physical 1:    : cores 0 1 2 3 4 5 6 7
cache size     : 20480 KB
```

### From /proc/meminfo

```
MemTotal:      264559344 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

### From /etc/\*release\* /etc/\*version\*

#### SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
```

#### os-release:

```
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 423

Lenovo ThinkServer RD550  
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp\_rate\_base2006 = 431

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

### Platform Notes (Continued)

```
uname -a:
Linux rd550-mlk-rackA02 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC
2015 (8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 24 11:39
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   690G  7.9G  683G   2% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO PB1TS335 01/09/2016

Memory:

16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at 1866 MHz  
8x NO DIMM NO DIMM

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

### Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 423**

Lenovo ThinkServer RD550  
(1.70 GHz, Intel Xeon E5-2609 v4)

**SPECfp\_rate\_base2006 = 431**

**CPU2006 license:** 9017

**Test date:** May-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 423**

Lenovo ThinkServer RD550  
(1.70 GHz, Intel Xeon E5-2609 v4)

**SPECfp\_rate\_base2006 = 431**

**CPU2006 license:** 9017

**Test date:** May-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deall: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 423**

Lenovo ThinkServer RD550  
(1.70 GHz, Intel Xeon E5-2609 v4)

**SPECfp\_rate\_base2006 = 431**

**CPU2006 license:** 9017

**Test date:** May-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD550  
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp\_rate2006 = 423

SPECfp\_rate\_base2006 = 431

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** May-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jun 28 17:33:15 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 June 2016.