SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Q170M-C motherboard (Intel Celeron G3900T)

SPECfp®_rate2006 = 83.8

SPECfp_rate_base2006 = 81.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2016
Hardware Availability: Dec-2015
Software Availability: Aug-2015

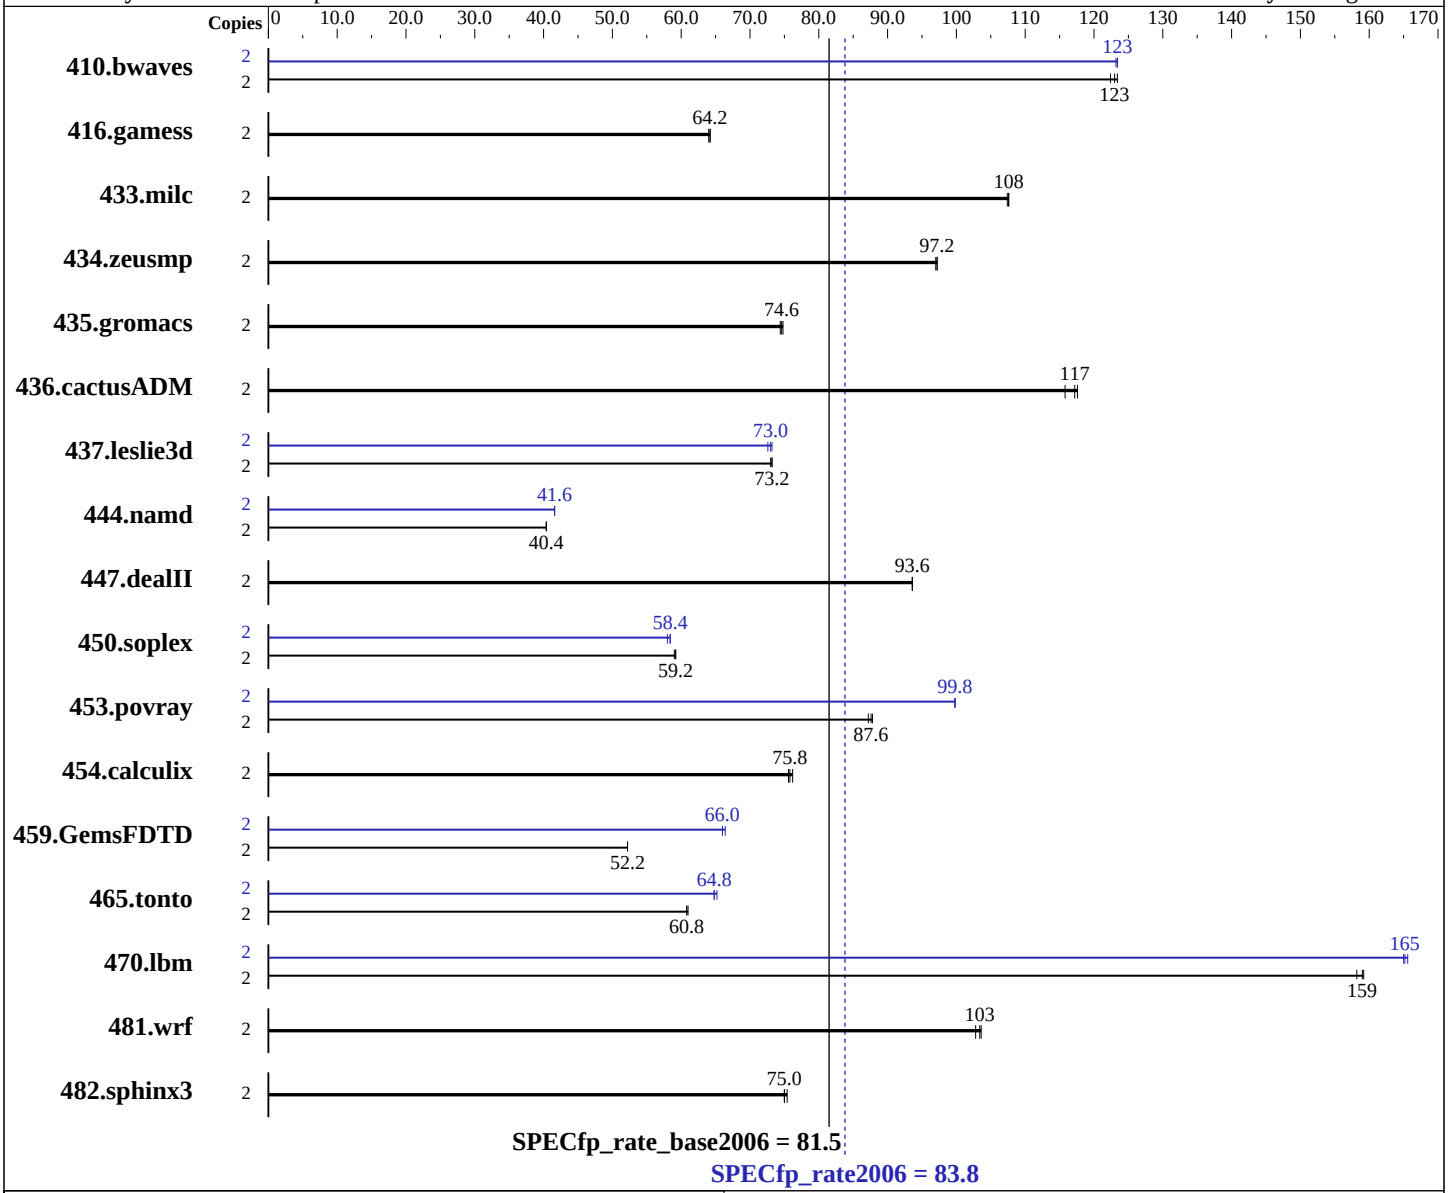

Hardware

CPU Name:	Intel Celeron G3900T
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Microsoft Windows 7 Professional 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows; Fortran: Version 16.0.0.110 of Intel Fortran Studio XE for Windows; Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Q170M-C motherboard (Intel Celeron G3900T)

SPECfp_rate2006 = 83.8

SPECfp_rate_base2006 = 81.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2016
Hardware Availability: Dec-2015
Software Availability: Aug-2015

L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx4 PC4-2133P-U)
Disk Subsystem:	1 TB Seagate Barracuda HDD, 7200 RPM
Other Hardware:	None

File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 11.0 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	222	122	**221**	**123**	220	123	2	**220**	**123**	221	123	220	123
416.gamess	2	**610**	**64.2**	610	64.2	612	64.0	2	**610**	**64.2**	610	64.2	612	64.0
433.milc	2	171	108	171	107	**171**	**108**	2	171	108	171	107	**171**	**108**
434.zeusmp	2	187	97.2	**187**	**97.2**	188	97.0	2	187	97.2	**187**	**97.2**	188	97.0
435.gromacs	2	192	74.4	191	74.8	**191**	**74.6**	2	192	74.4	191	74.8	**191**	**74.6**
436.cactusADM	2	203	118	207	116	**204**	**117**	2	203	118	207	116	**204**	**117**
437.leslie3d	2	257	73.2	**257**	**73.2**	258	73.0	2	257	73.2	**258**	**73.0**	259	72.6
444.namd	2	396	40.4	397	40.4	**396**	**40.4**	2	385	41.6	**385**	**41.6**	385	41.6
447.dealII	2	244	93.6	**244**	**93.6**	245	93.6	2	244	93.6	**244**	**93.6**	245	93.6
450.soplex	2	282	59.2	282	59.0	**282**	**59.2**	2	**286**	**58.4**	287	58.0	286	58.4
453.povray	2	**121**	**87.6**	121	87.8	122	87.2	2	107	99.8	107	99.8	**107**	**99.8**
454.calculix	2	218	75.6	217	76.2	**218**	**75.8**	2	218	75.6	217	76.2	**218**	**75.8**
459.GemsFDTD	2	**407**	**52.2**	407	52.2	407	52.2	2	321	66.0	320	66.4	**321**	**66.0**
465.tonto	2	**323**	**60.8**	323	61.0	324	60.8	2	302	65.2	**304**	**64.8**	304	64.8
470.lbm	2	**173**	**159**	174	158	173	159	2	166	166	**166**	**165**	167	165
481.wrf	2	217	103	216	104	**216**	**103**	2	217	103	216	104	**216**	**103**
482.sphinx3	2	517	75.4	**520**	**75.0**	520	75.0	2	517	75.4	**520**	**75.0**	520	75.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 16.0 was set up to
generate 64-bit binaries with the command:
"psxevars.bat intel64" (shortcut provided in the Intel(r)
Parallel Studio XE 2016 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC16.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on CltF832E48856E2 Sun Apr 24 02:26:15 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    Trying 'systeminfo'
    OS Name        : Microsoft Windows 7 Professional
    OS Version     : 6.1.7601 Service Pack 1 Build 7601
    System Manufacturer: System manufacturer
    System Model   : System Product Name
    Processor(s)   : 1 Processor(s) Installed.
         [01]: Intel64 Family 6 Model 94 Stepping 3 GenuineIntel ~2601 Mhz
    BIOS Version   : American Megatrends Inc. 0704, 1/12/2016
    Total Physical Memory: 8,070 MB

    Trying 'wmic cpu get /value'
    DeviceID       : CPU0
    L2CacheSize    : 512
    L3CacheSize    : 2048
    MaxClockSpeed  : 2601
    Name           : Intel(R) Celeron(R) CPU G3900T @ 2.60GHz
    NumberOfCores  : 2
    NumberOfLogicalProcessors: 2

    (End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
450.soplex (peak): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxx11_make_pair" src.alt was used.

450.soplex (base): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxx11_make_pair" src.alt was used.

 Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
 + 64GB memory using Windows 8.1 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:

```
    icl -Qvc12 -Qstd=c99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icl -Qvc12

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc12 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG -DSPEC_CPU_BOOST_CONFIG_MSC_VER -DSPEC_NEED_ALGORITHM
450.soplex: -DSPEC_CPU_P64 -DSPEC_GETLINE_TEST
453.povray: -DSPEC_CPU_P64
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F1000000000 -link /FORCE:MULTIPLE

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc12 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -QxSSE4.2 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3
-Qprec-div- -Qansi-alias -Qopt-prefetch -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: -QxSSE4.2 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F1000000000 -link /FORCE:MULTIPLE

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 12 11:02:20 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 July 2016.