SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Q170M-C motherboard (Intel Core i7-6700K)

SPECfp®_rate2006 = 187

SPECfp_rate_base2006 = 182

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Mar-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

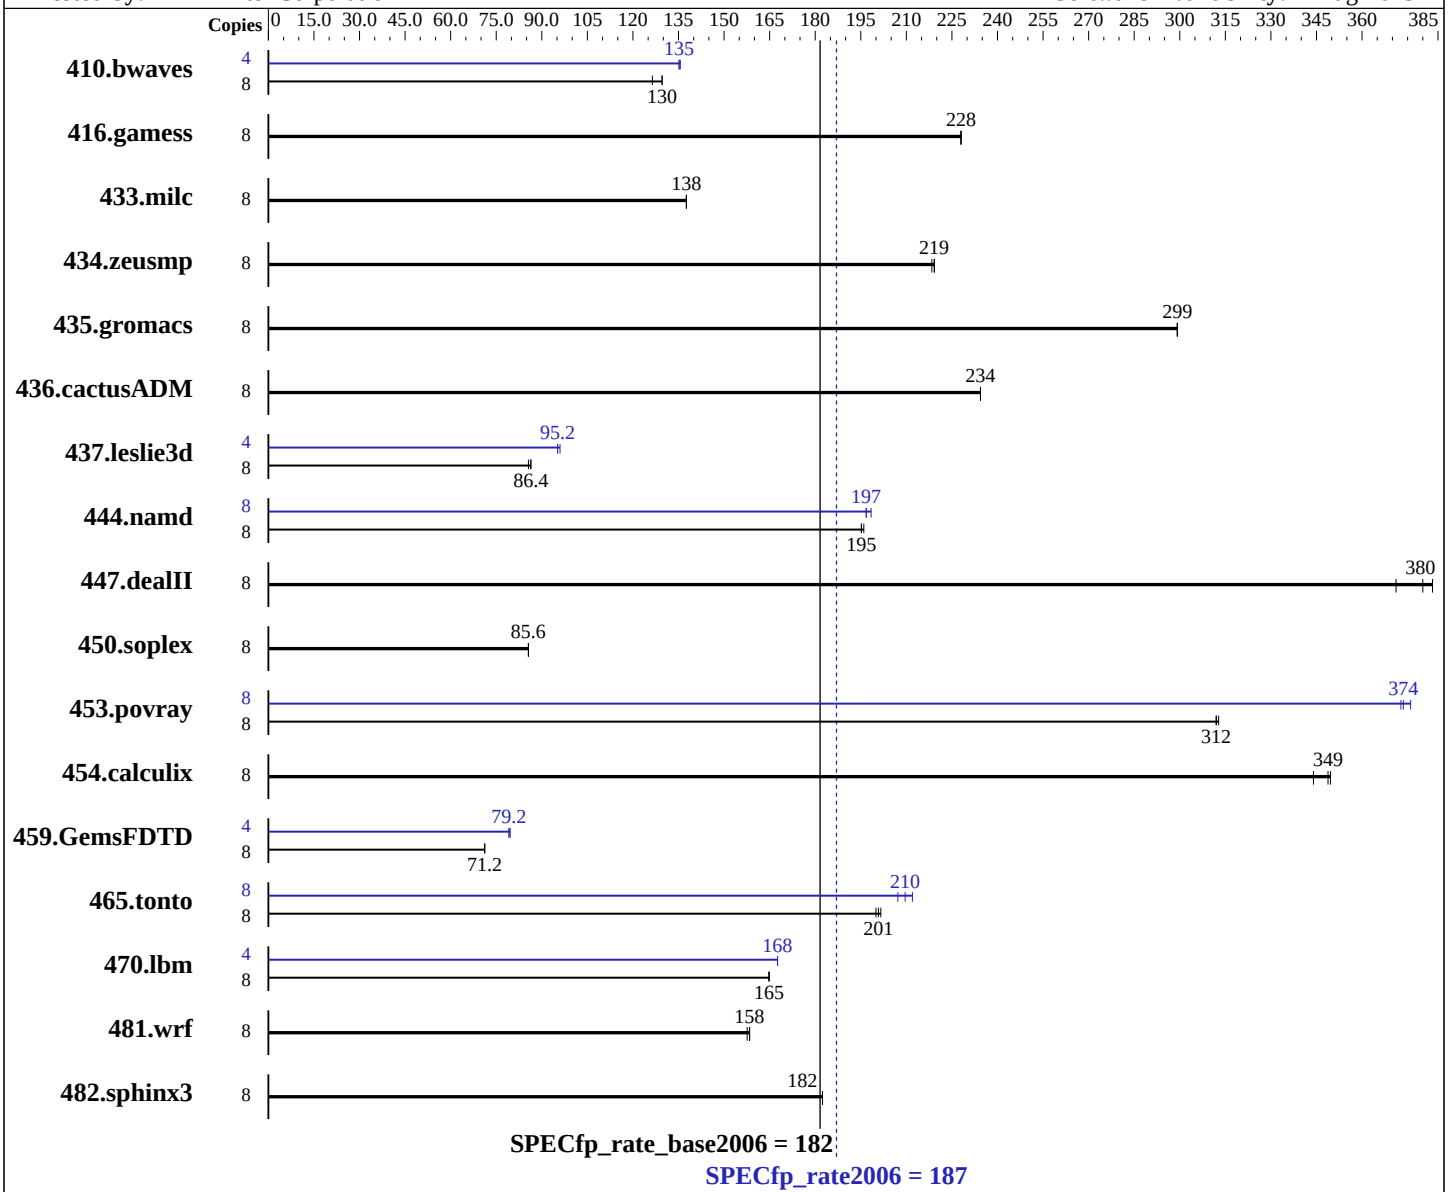

Hardware

CPU Name:	Intel Core i7-6700K
CPU Characteristics:	Intel Turbo Boost Technology up to 4.20 GHz
CPU MHz:	4000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Microsoft Windows 7 Professional 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows; Fortran: Version 16.0.0.110 of Intel Fortran Studio XE for Windows; Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Q170M-C motherboard (Intel Core i7-6700K)

SPECfp_rate2006 = 187

SPECfp_rate_base2006 = 182

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Mar-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx4 PC4-2133P-U)
Disk Subsystem:	1 TB Seagate Barracuda HDD, 7200 RPM
Other Hardware:	None

File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 11.0 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	861	126	841	130	**841**	**130**	4	402	135	401	136	**402**	**135**
416.gamess	8	688	228	**687**	**228**	686	228	8	688	228	**687**	**228**	686	228
433.milc	8	534	138	**534**	**138**	534	138	8	534	138	**534**	**138**	534	138
434.zeusmp	8	332	219	333	218	**333**	**219**	8	332	219	333	218	**333**	**219**
435.gromacs	8	**191**	**299**	191	299	191	299	8	**191**	**299**	191	299	191	299
436.cactusADM	8	408	234	408	234	**408**	**234**	8	408	234	408	234	**408**	**234**
437.leslie3d	8	**873**	**86.4**	876	85.6	871	86.4	4	395	95.2	**394**	**95.2**	392	96.0
444.namd	8	**329**	**195**	328	196	329	195	8	324	198	**326**	**197**	326	197
447.dealII	8	247	371	**241**	**380**	239	383	8	247	371	**241**	**380**	239	383
450.soplex	8	**779**	**85.6**	782	85.6	778	85.6	8	**779**	**85.6**	782	85.6	778	85.6
453.povray	8	**136**	**312**	136	312	136	313	8	114	373	113	376	**114**	**374**
454.calculix	8	192	344	**189**	**349**	189	350	8	192	344	**189**	**349**	189	350
459.GemsFDTD	8	**1190**	**71.2**	1190	71.2	1192	71.2	4	536	79.2	533	79.6	**536**	**79.2**
465.tonto	8	393	200	391	202	**392**	**201**	8	372	212	**375**	**210**	380	207
470.lbm	8	667	165	**667**	**165**	667	165	4	**328**	**168**	328	168	328	168
481.wrf	8	566	158	565	158	**566**	**158**	8	566	158	565	158	**566**	**158**
482.sphinx3	8	854	182	856	182	**855**	**182**	8	854	182	856	182	**855**	**182**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 16.0 was set up to
generate 64-bit binaries with the command:
"psxevars.bat intel64" (shortcut provided in the Intel(r)
Parallel Studio XE 2016 program folder)
```

Submit Notes

```
Processes were bound to specific processors using the start command with the /affinity switch.
The config file option 'submit' was used to generate the affinity mask for each process.
```

Platform Notes

```
Sysinfo program C:\SPEC16.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on CltF832E48856E2 Tue Mar  8 19:03:15 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Professional
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 94 Stepping 3 GenuineIntel ~4001 Mhz
BIOS Version  : American Megatrends Inc. 0704, 1/12/2016
Total Physical Memory: 8,069 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 1024
L3CacheSize   : 8192
MaxClockSpeed : 4001
Name          : Intel(R) Core(TM) i7-6700K CPU @ 4.00GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 8

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
450.soplex (base): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxx11_make_pair" src.alt was used.

450.soplex (base): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxx11_make_pair" src.alt was used.

 Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
 + 64GB memory using Windows 8.1 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc12 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc12
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc12 -Qstd=c99 ifort
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_P64
    416.gamess: -DSPEC_CPU_P64
      433.milc: -DSPEC_CPU_P64
    434.zeusmp: -DSPEC_CPU_P64
    435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
    437.leslie3d: -DSPEC_CPU_P64
      444.namd: -DSPEC_CPU_P64 /TP
     447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
                 -DSPEC_CPU_BOOST_CONFIG_MSC_VER -DSPEC_NEED_ALGORITHM
     450.soplex: -DSPEC_CPU_P64 -DSPEC_GETLINE_TEST
     453.povray: -DSPEC_CPU_P64
    454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
      465.tonto: -DSPEC_CPU_P64
       470.lbm: -DSPEC_CPU_P64
       481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
    482.sphinx3: -DSPEC_CPU_P64
```

Base Optimization Flags

C benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 shlW64M.lib            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
            -link /FORCE:MULTIPLE
```

Fortran benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 shlW64M.lib            -link /FORCE:MULTIPLE
```

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc12 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -QxCORE-AVX2 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: -QxCORE-AVX2 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 12 11:02:39 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 July 2016.