# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL450 Gen9
(3.40 GHz, Intel Xeon E5-2643 v4)

SPECint®2006 = 71.6

SPECint_base2006 = 68.1

**CPU2006 license:** 3
**Test sponsor:** HPE
**Tested by:** HPE

**Test date:** Jun-2016
**Hardware Availability:** Mar-2016
**Software Availability:** Nov-2015

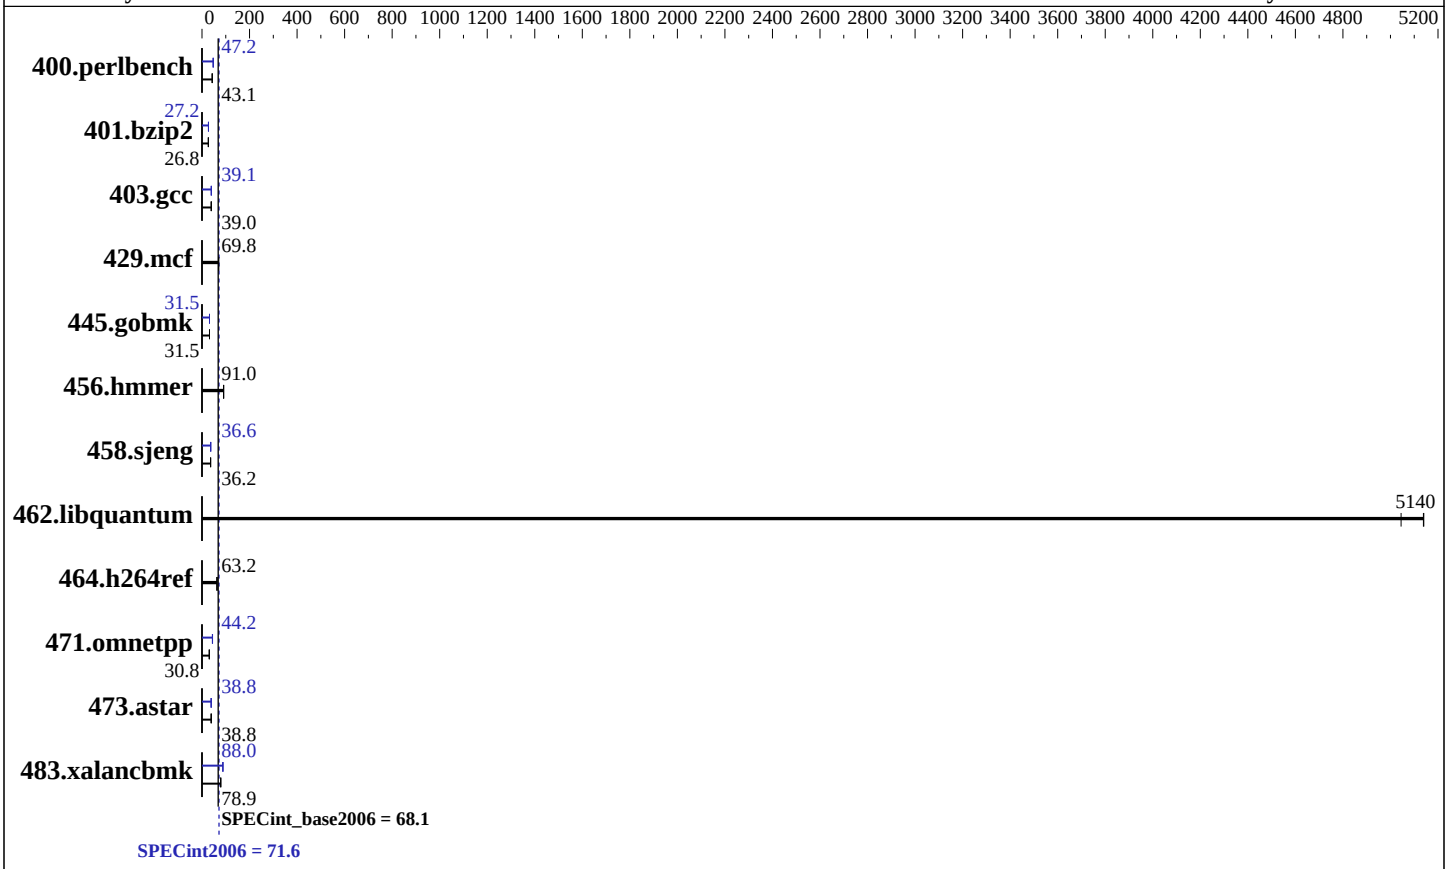


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E5-2643 v4 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.70 GHz |
| CPU MHz: | 3400 |
| FPU: | Integrated |
| CPU(s) enabled: | 12 cores, 2 chips, 6 cores/chip |
| CPU(s) orderable: | 1,2 chips |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 20 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R) |
| Disk Subsystem: | 2 x 480 GB SATA SSD, RAID 1 |
| Other Hardware: | None |

## Software

| | |
|---|---|
| Operating System: | Red Hat Enterprise Linux Server release 7.2 (Maipo)<br>Kernel 3.10.0-327.el7.x86_64 |
| Compiler: | C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux |
| Auto Parallel: | Yes |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32/64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.2 |

# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant XL450 Gen9
(3.40 GHz, Intel Xeon E5-2643 v4)

SPECint2006 = 71.6

SPECint_base2006 = 68.1

**CPU2006 license:** 3
**Test sponsor:** HPE
**Tested by:** HPE

**Test date:** Jun-2016
**Hardware Availability:** Mar-2016
**Software Availability:** Nov-2015

## Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 229 | 42.7 | 225 | 43.4 | **227** | **43.1** | 207 | 47.2 | 207 | 47.2 | **207** | **47.2** |
| 401.bzip2 | **361** | **26.8** | 360 | 26.8 | 361 | 26.7 | 355 | 27.2 | **355** | **27.2** | 355 | 27.2 |
| 403.gcc | **206** | **39.0** | 206 | 39.0 | 207 | 38.9 | 206 | 39.1 | **206** | **39.1** | 205 | 39.2 |
| 429.mcf | 129 | 70.5 | 131 | 69.8 | **131** | **69.8** | 129 | 70.5 | 131 | 69.8 | **131** | **69.8** |
| 445.gobmk | **333** | **31.5** | 332 | 31.6 | 333 | 31.5 | 333 | 31.5 | 332 | 31.6 | **333** | **31.5** |
| 456.hmmer | 103 | 90.7 | 102 | 91.2 | **103** | **91.0** | 103 | 90.7 | 102 | 91.2 | **103** | **91.0** |
| 458.sjeng | **334** | **36.2** | 334 | 36.2 | 334 | 36.2 | 331 | 36.6 | **330** | **36.6** | 330 | 36.6 |
| 462.libquantum | 4.03 | 5140 | 4.11 | 5040 | **4.03** | **5140** | 4.03 | 5140 | 4.11 | 5040 | **4.03** | **5140** |
| 464.h264ref | 350 | 63.3 | 351 | 63.0 | **350** | **63.2** | 350 | 63.3 | 351 | 63.0 | **350** | **63.2** |
| 471.omnetpp | 204 | 30.6 | 203 | 30.8 | **203** | **30.8** | 143 | 43.6 | 141 | 44.4 | **142** | **44.2** |
| 473.astar | 181 | 38.8 | 182 | 38.6 | **181** | **38.8** | 181 | 38.8 | 183 | 38.3 | **181** | **38.8** |
| 483.xalancbmk | 87.5 | 78.9 | **87.5** | **78.9** | 87.6 | 78.8 | 78.3 | 88.1 | **78.4** | **88.0** | 78.8 | 87.6 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The config file option 'submit' was used.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
   echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Platform Notes

```
BIOS Configuration:
   Intel Hyperthreading set to Disabled
   Power Profile set to Custom
   Power Regulator set to Static High Performance Mode
   Minimum Processor Idle Power Core C-State set to C6 State
   Minimum Processor Idle Power Package C-State set to Package C6 (retention) State
   Energy/Performance Bias set to Balance Performance
   QPI Snoop Configuration set to Home Snoop
   Collaborative Power Control set to Disabled
   Thermal Configuration set to Maximum Cooling
   Processor Power and Utilization Monitoring set to Disabled
   Memory Double Refresh Rate set to 1x Refresh
   Memory Patrol Scrubbing set to Disabled

Sysinfo program /cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on XL450-G9-node2 Sun Jun 12 14:22:56 2016
```

Continued on next page

## Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2643 v4 @ 3.40GHz
      2 "physical id"s (chips)
      12 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 6
      physical 0: cores 0 1 2 3 6 7
      physical 1: cores 0 1 2 3 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       263713756 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux XL450-G9-node2 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT
   2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 12 02:12

SPEC is set to: /cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   438G   20G  419G   5% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.
```

Continued on next page

## Platform Notes (Continued)

```
      BIOS HP U21 03/10/2016
      Memory:
       8x UNKNOWN NOT AVAILABLE
       8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

    (End of data from sysinfo program)
    Regarding the sysinfo display about the memory installed, the correct amount of
    memory is 256 GB and the dmidecode description should have one line reading as:
    8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz
```

## General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
OMP_NUM_THREADS = "12"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
```

## Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

## Base Portability Flags

```
    400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
      401.bzip2: -DSPEC_CPU_LP64
        403.gcc: -DSPEC_CPU_LP64
        429.mcf: -DSPEC_CPU_LP64
      445.gobmk: -DSPEC_CPU_LP64
      456.hmmer: -DSPEC_CPU_LP64
      458.sjeng: -DSPEC_CPU_LP64
    462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
    464.h264ref: -DSPEC_CPU_LP64
    471.omnetpp: -DSPEC_CPU_LP64
      473.astar: -DSPEC_CPU_LP64
    483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32`
`-Wl,-z,muldefs -L/sh -lsmartheap64`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

445.gobmk: `icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

C++ benchmarks (except as noted below):
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

473.astar: `icpc -m64`

## Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

Continued on next page

## Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml`


SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 12 11:03:52 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 July 2016.