SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECint®_rate2006 = 1510

SPECint_rate_base2006 = 1450

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Jun-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

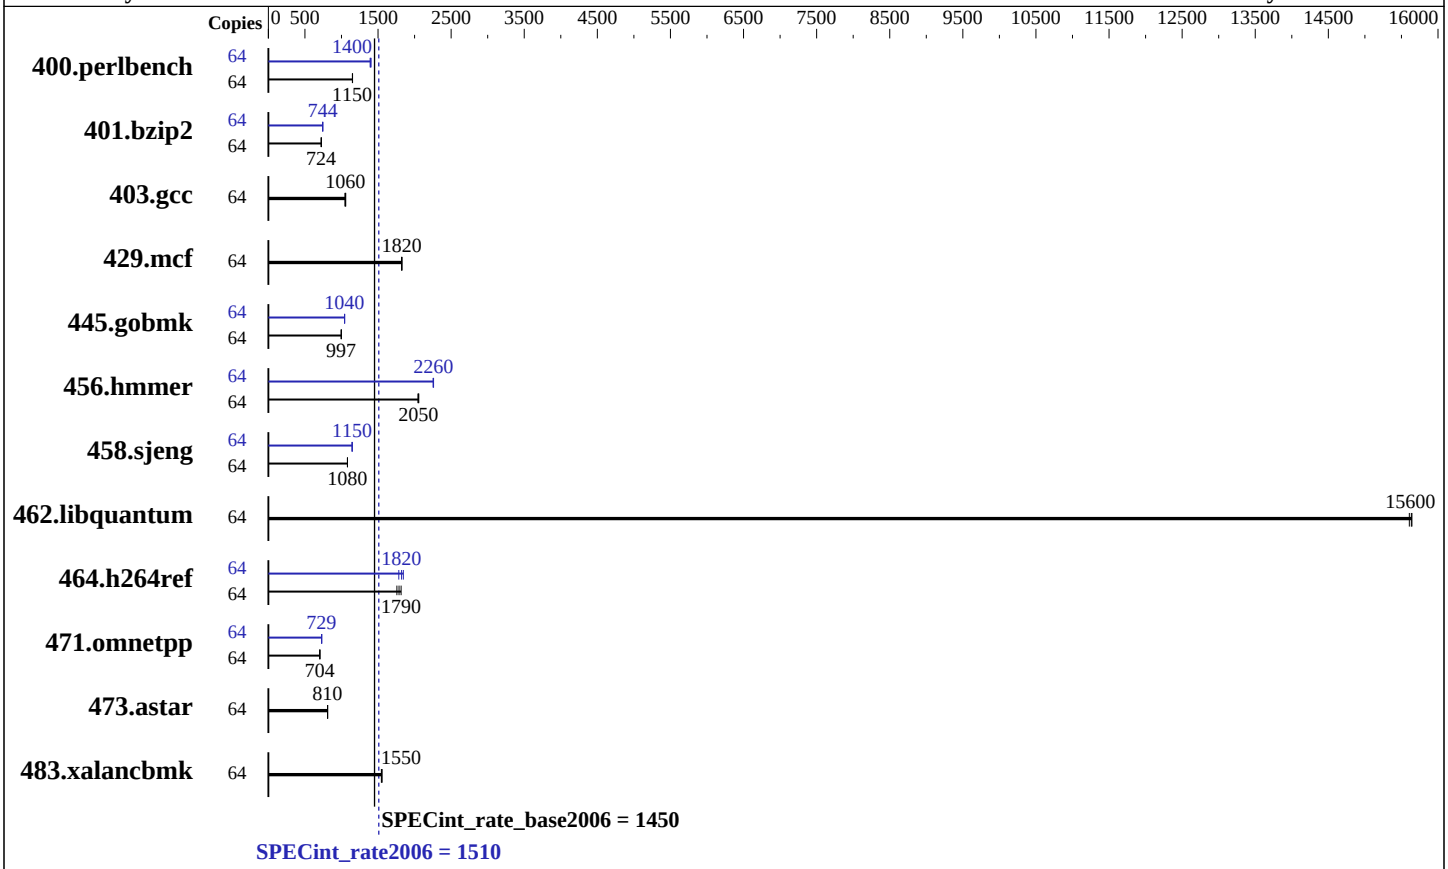

Hardware

CPU Name:	Intel Xeon E5-2697A v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	32 cores, 2 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	40 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	1 x 400 GB SAS SSD, RAID 0
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2, (Maipo) Kernel 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL380 Gen9
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECint_rate2006 = 1510

SPECint_rate_base2006 = 1450

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Jun-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	**544**	**1150**	543	1150	544	1150	64	445	1410	449	1390	**448**	**1400**
401.bzip2	64	856	722	851	725	**853**	**724**	64	**831**	**744**	832	742	830	744
403.gcc	64	**488**	**1060**	492	1050	487	1060	64	**488**	**1060**	492	1050	487	1060
429.mcf	64	320	1820	319	1830	**320**	**1820**	64	320	1820	319	1830	**320**	**1820**
445.gobmk	64	673	998	674	996	**673**	**997**	64	**644**	**1040**	644	1040	644	1040
456.hmmer	64	290	2060	**291**	**2050**	292	2050	64	264	2260	**265**	**2260**	265	2250
458.sjeng	64	716	1080	**716**	**1080**	716	1080	64	**675**	**1150**	676	1150	675	1150
462.libquantum	64	84.8	15600	85.0	15600	**84.8**	**15600**	64	84.8	15600	85.0	15600	**84.8**	**15600**
464.h264ref	64	**792**	**1790**	780	1820	806	1760	64	794	1780	**777**	**1820**	767	1850
471.omnetpp	64	570	702	567	705	**568**	**704**	64	548	730	549	728	**549**	**729**
473.astar	64	555	810	554	810	**555**	**810**	64	555	810	554	810	**555**	**810**
483.xalancbmk	64	286	1550	**284**	**1550**	284	1550	64	286	1550	**284**	**1550**	284	1550

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS Configuration:
  HP Power Profile set to Custom
  HP Power Regulator to HP Static High Performance Mode
  Minimum Processor Idle Power Core C-State set to C1E State
  Minimum Processor Idle Power Package C-State set to No Package State
  QPI Snoop Configuration set to Home Snoop
  Collaborative Power Control set to Disabled
  Thermal Configuration set to Maximum Cooling
  Processor Power and Utilization Monitoring set to Disabled
  Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/intel_binary/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on DL380Gen9-Biswa Fri Jun  3 22:06:16 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2697A v4 @ 2.60GHz
          2 "physical id"s (chips)
          64 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 16
          siblings  : 32
          physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
          physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       cache size : 20480 KB

    From /proc/meminfo
       MemTotal:       528062224 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       os-release:
          NAME="Red Hat Enterprise Linux Server"
          VERSION="7.2 (Maipo)"
          ID="rhel"
          ID_LIKE="fedora"
          VERSION_ID="7.2"
          PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
          ANSI_COLOR="0;31"
          CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
       redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
       system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

    uname -a:
       Linux DL380Gen9-Biswa 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT
       2015 x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Jun 3 22:03

    SPEC is set to: /home/intel_binary/cpu2006
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda5      xfs   318G   80G  238G  26% /home
    Additional information from dmidecode:

       Warning: Use caution when you interpret this section. The 'dmidecode' program
       reads system data which is "intended to allow hardware to be accurately
       determined", but the intent may not be met, as there are frequent changes to
       hardware, firmware, and the "DMTF SMBIOS" standard.

      BIOS HP P89 04/12/2016
      Memory:
```

Continued on next page

Platform Notes (Continued)

```
      8x UNKNOWN NOT AVAILABLE
      16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

   (End of data from sysinfo program)
   Regarding the sysinfo display about the memory installed, the correct amount of
   memory is 512 GB and the dmidecode description should have one line reading as:
   16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/intel_binary/cpu2006/libs/32:/home/intel_binary/cpu2006/libs/64:/home/intel_binary/cpu2006/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64`
458.sjeng: `-D_FILE_OFFSET_BITS=64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 12 11:03:50 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 July 2016.