SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R430 (Intel Xeon E5-2643 v4, 3.40 GHz)

SPECfp®_rate2006 = 606

SPECfp_rate_base2006 = 594

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2016
Hardware Availability: Jun-2016
Software Availability: Dec-2015

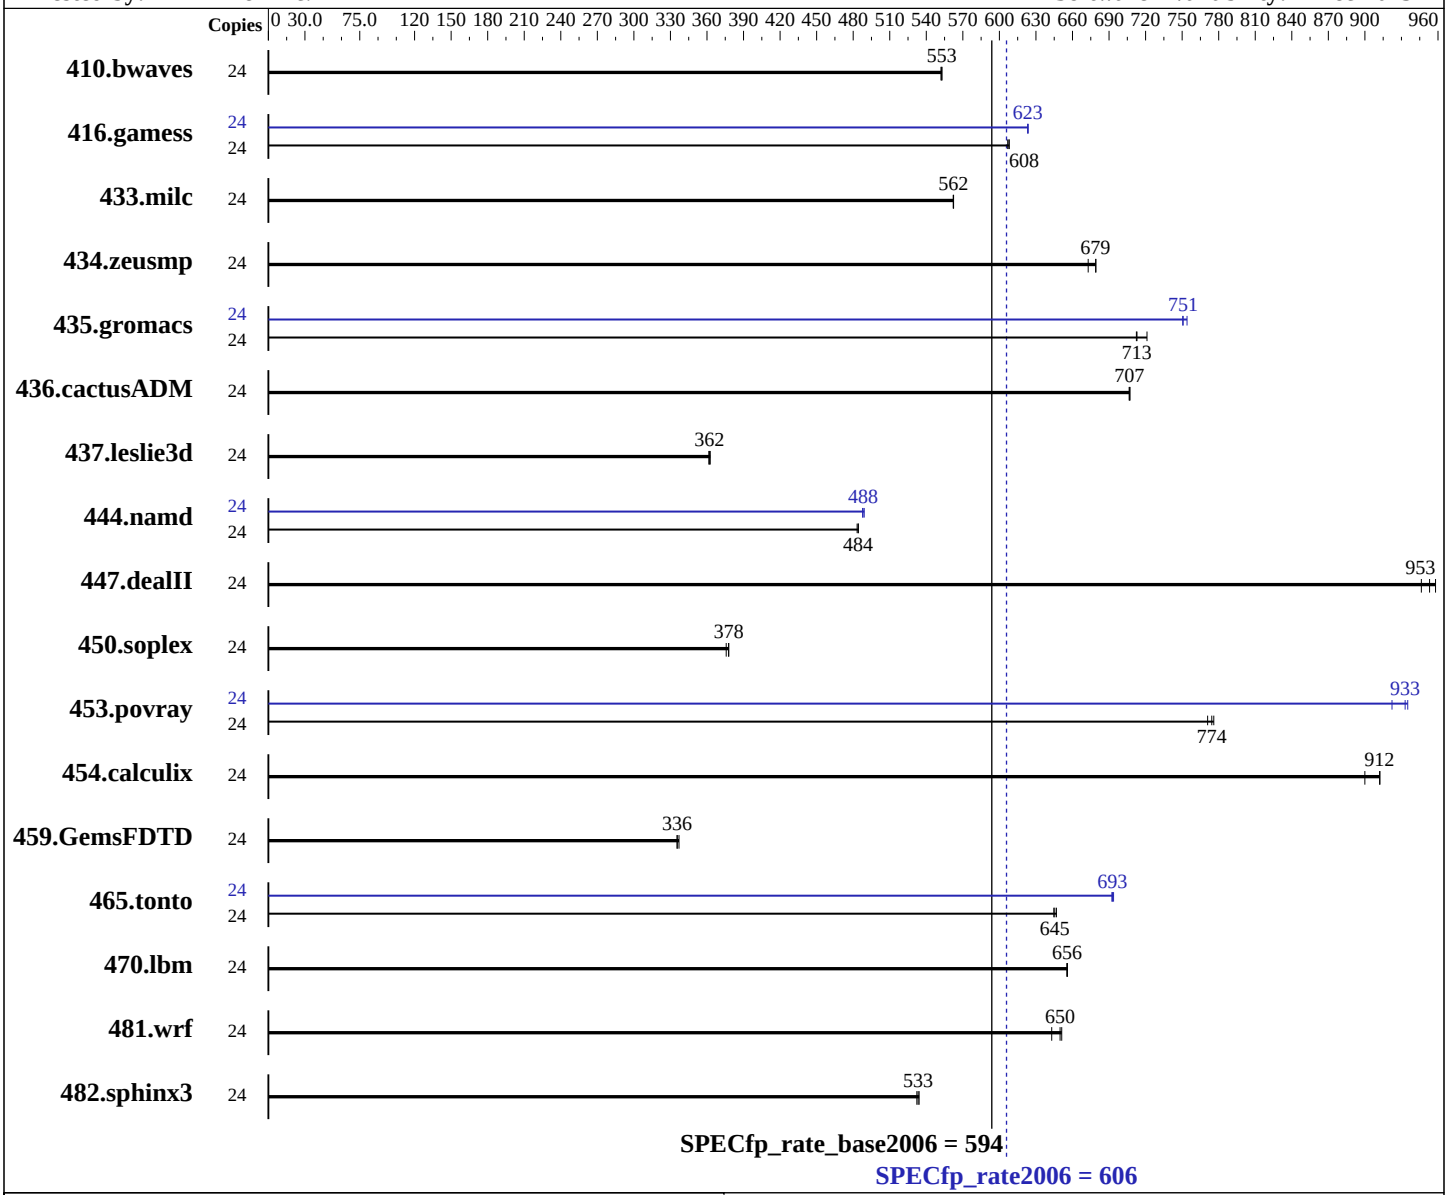

Hardware

CPU Name:	Intel Xeon E5-2643 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler:	C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R430 (Intel Xeon E5-2643 v4, 3.40 GHz)

SPECfp_rate2006 = 606

SPECfp_rate_base2006 = 594

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2016
Hardware Availability: Jun-2016
Software Availability: Dec-2015

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx8 PC4-2400T-R)
Disk Subsystem: 1 x 250 GB 7200 RPM SATA HDD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	**590**	**553**	591	552	590	553	24	**590**	**553**	591	552	590	553
416.gamess	24	774	607	773	608	**773**	**608**	24	**754**	**623**	754	623	754	624
433.milc	24	392	562	392	562	**392**	**562**	24	392	562	392	562	**392**	**562**
434.zeusmp	24	**322**	**679**	322	679	325	673	24	**322**	**679**	322	679	325	673
435.gromacs	24	241	712	238	721	**240**	**713**	24	228	750	227	754	**228**	**751**
436.cactusADM	24	406	707	406	706	**406**	**707**	24	406	707	406	706	**406**	**707**
437.leslie3d	24	624	362	622	363	**623**	**362**	24	624	362	622	363	**623**	**362**
444.namd	24	398	483	**398**	**484**	398	484	24	**394**	**488**	394	489	395	488
447.dealII	24	**288**	**953**	290	946	287	958	24	**288**	**953**	290	946	287	958
450.soplex	24	**530**	**378**	530	378	533	376	24	**530**	**378**	530	378	533	376
453.povray	24	**165**	**774**	165	776	166	771	24	137	935	138	922	**137**	**933**
454.calculix	24	217	912	220	900	**217**	**912**	24	217	912	220	900	**217**	**912**
459.GemsFDTD	24	756	337	**759**	**336**	759	335	24	756	337	**759**	**336**	759	335
465.tonto	24	366	645	**366**	**645**	365	647	24	341	692	340	694	**341**	**693**
470.lbm	24	503	655	503	656	**503**	**656**	24	503	655	503	656	**503**	**656**
481.wrf	24	417	643	412	651	**413**	**650**	24	417	643	412	651	**413**	**650**
482.sphinx3	24	**877**	**533**	876	534	879	532	24	**877**	**533**	876	534	879	532

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Snoop Mode set to Opportunistic Snoop Broadcast
Virtualization Technology disabled
```

Continued on next page

Platform Notes (Continued)

```
System Profile set to custom
CPU Power Management set to Hardware P States
C States set to Autonomous
C1E disabled
Energy Efficient Turbo disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Balanced Performance
Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-n1xa Mon Jun  6 17:24:40 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2643 v4 @ 3.40GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 12
      physical 0: cores 0 1 2 3 6 7
      physical 1: cores 0 1 2 3 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       132054328 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
      ID="sles"
      ANSI_COLOR="0;32"
```

Continued on next page

Platform Notes (Continued)

```
      CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
   Linux linux-n1xa 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 6 08:55

SPEC is set to: /root/cpu2006-1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      ext4  221G  8.8G  212G   4% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS Dell Inc. 2.0.1 04/11/2016
  Memory:
   4x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz
   4x 00CE00B300CE M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz
   4x Not Specified Not Specified

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

 Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB
 memory using RedHat EL 7.2 glibc 2.17
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc   -m64
```

C++ benchmarks:

```
icpc  -m64
```

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 9 17:04:18 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 August 2016.