SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R430 (Intel Xeon E5-2695 v4, 2.10 GHz)

SPECint®_rate2006 = 1410

SPECint_rate_base2006 = 1360

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2016
Hardware Availability: Jun-2016
Software Availability: Dec-2015

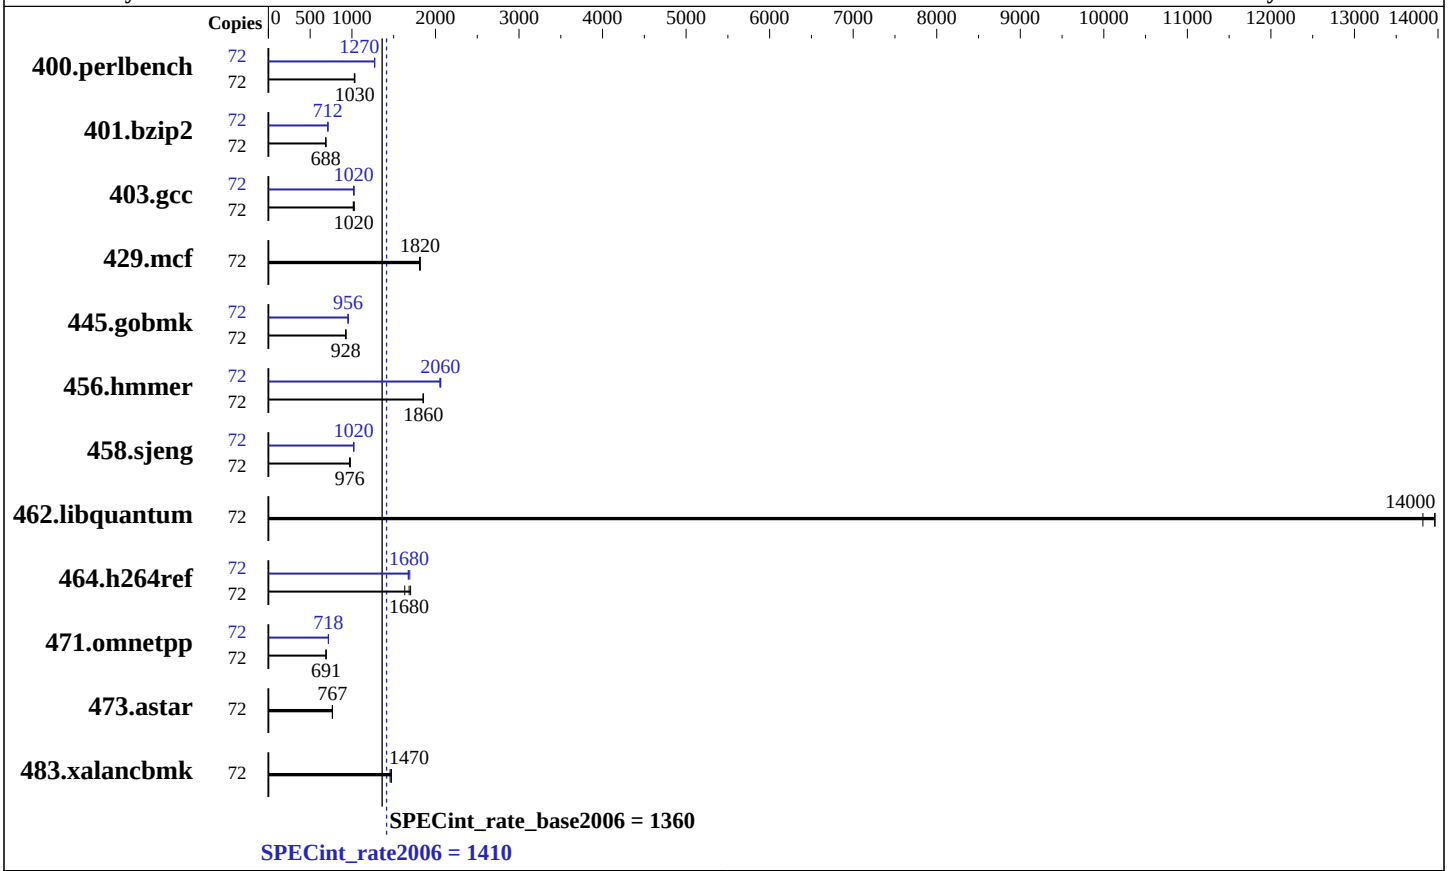

Hardware

CPU Name:	Intel Xeon E5-2695 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	36 cores, 2 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	1 x 250 GB 7200 RPM SATA HDD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler:	C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R430 (Intel Xeon E5-2695 v4, 2.10 GHz)

SPECint_rate2006 = 1410

SPECint_rate_base2006 = 1360

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2016
Hardware Availability: Jun-2016
Software Availability: Dec-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	680	1030	**681**	**1030**	684	1030	72	554	1270	**553**	**1270**	552	1270
401.bzip2	72	1013	686	**1010**	**688**	1008	689	72	977	711	**975**	**712**	974	713
403.gcc	72	570	1020	564	1030	**567**	**1020**	72	569	1020	564	1030	**567**	**1020**
429.mcf	72	361	1820	363	1810	**362**	**1820**	72	361	1820	363	1810	**362**	**1820**
445.gobmk	72	814	928	**814**	**928**	816	926	72	789	957	**790**	**956**	794	951
456.hmmer	72	363	1850	362	1860	**362**	**1860**	72	327	2050	**326**	**2060**	326	2060
458.sjeng	72	**893**	**976**	896	973	888	981	72	**852**	**1020**	854	1020	852	1020
462.libquantum	72	108	13800	107	14000	**107**	**14000**	72	108	13800	107	14000	**107**	**14000**
464.h264ref	72	**946**	**1680**	976	1630	936	1700	72	952	1670	**950**	**1680**	941	1690
471.omnetpp	72	**651**	**691**	653	690	651	691	72	626	719	626	718	**626**	**718**
473.astar	72	659	767	**659**	**767**	661	765	72	659	767	**659**	**767**	661	765
483.xalancbmk	72	**338**	**1470**	341	1460	337	1470	72	**338**	**1470**	341	1460	337	1470

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Snoop Mode set to Cluster on Die
Virtualization Technology disabled
System Profile set to custom
CPU Power Management set to Hardware P States
C States set to Autonomous
C1E disabled
Energy Efficient Turbo disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Balanced Performance
Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-n1xa Tue May 24 19:25:03 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2695 v4 @ 2.10GHz
          2 "physical id"s (chips)
          72 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 18
          siblings  : 36
          physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
          physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
       cache size : 23040 KB

    From /proc/meminfo
       MemTotal:       264436480 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    /usr/bin/lsb_release -d
       SUSE Linux Enterprise Server 12 SP1

    From /etc/*release* /etc/*version*
       SuSE-release:
          SUSE Linux Enterprise Server 12 (x86_64)
          VERSION = 12
          PATCHLEVEL = 1
          # This file is deprecated and will be removed in a future service pack or
          release.
          # Please check /etc/os-release for details about this release.
       os-release:
          NAME="SLES"
          VERSION="12-SP1"
          VERSION_ID="12.1"
          PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
          ID="sles"
          ANSI_COLOR="0;32"
          CPE_NAME="cpe:/o:suse:sles:12:sp1"

    uname -a:
       Linux linux-n1xa 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
       (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 May 24 19:22

    SPEC is set to: /root/cpu2006-1.2
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda2      ext4  221G  8.6G  212G   4% /
    Additional information from dmidecode:

       Warning: Use caution when you interpret this section. The 'dmidecode' program
```

Continued on next page

Platform Notes (Continued)

```
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS Dell Inc. 2.0.1 04/11/2016
    Memory:
     8x 00CE00B300CE M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz
     4x Not Specified Not Specified

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

 Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB
 memory using RedHat EL 7.2 glibc 2.17
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
    400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
      401.bzip2: -D_FILE_OFFSET_BITS=64
        403.gcc: -D_FILE_OFFSET_BITS=64
        429.mcf: -D_FILE_OFFSET_BITS=64
      445.gobmk: -D_FILE_OFFSET_BITS=64
      456.hmmer: -D_FILE_OFFSET_BITS=64
      458.sjeng: -D_FILE_OFFSET_BITS=64
  462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
    464.h264ref: -D_FILE_OFFSET_BITS=64
    471.omnetpp: -D_FILE_OFFSET_BITS=64
      473.astar: -D_FILE_OFFSET_BITS=64
```

Continued on next page

Base Portability Flags (Continued)

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64

Continued on next page

Peak Portability Flags (Continued)

456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs

Continued on next page

Peak Optimization Flags (Continued)

471.omnetpp (continued):
`-L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 9 17:04:35 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 August 2016.