



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 1590**

PowerEdge FC630 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECint\_rate\_base2006 = 1530**

CPU2006 license: 55


Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

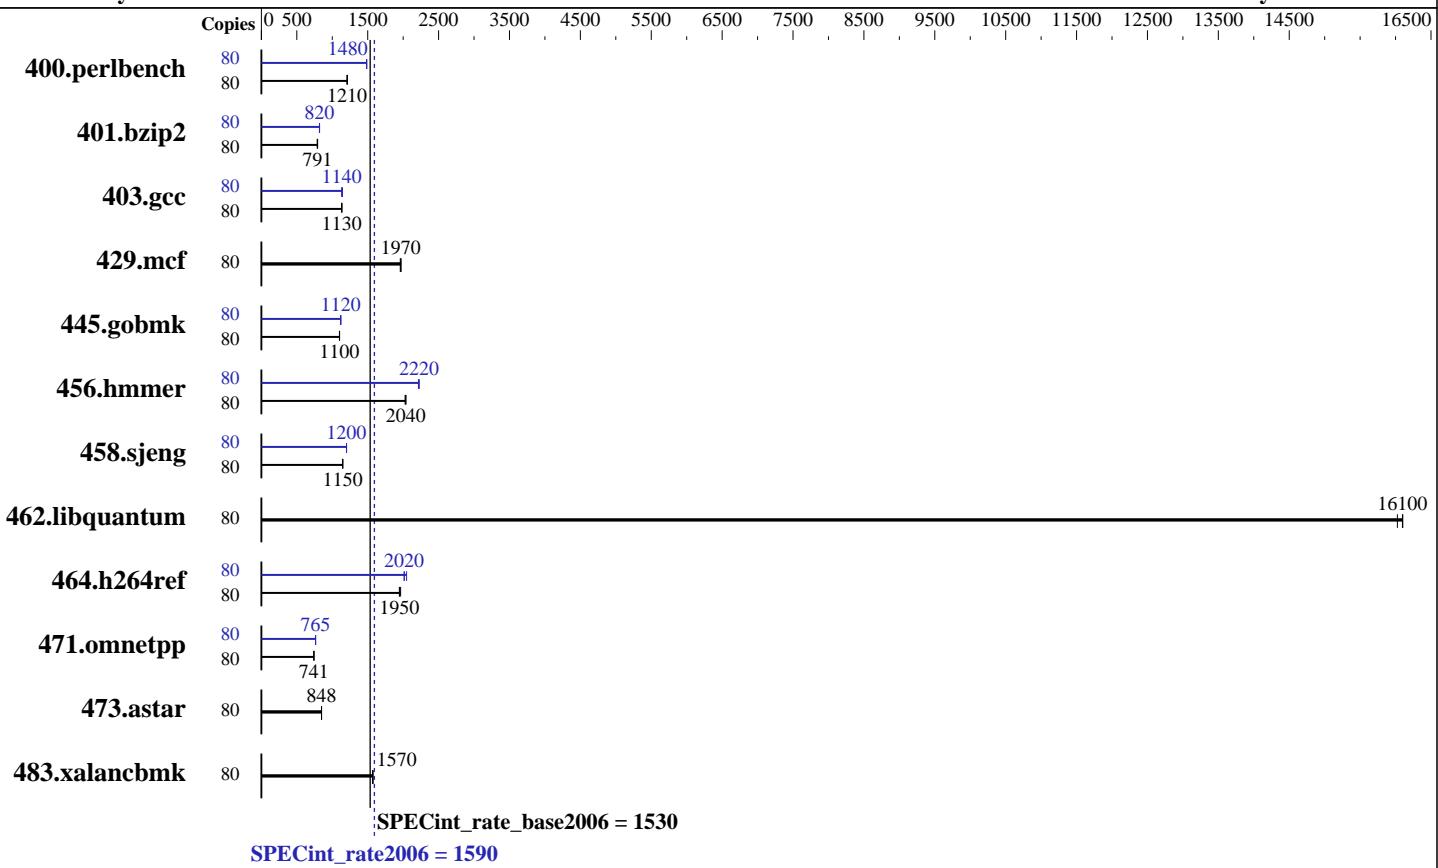

Hardware		Software	
CPU Name:	Intel Xeon E5-2698 v4	Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo)
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz		3.10.0-327.el7.x86_64
CPU MHz:	2200	Compiler:	C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux
FPU:	Integrated	Auto Parallel:	No
CPU(s) enabled:	40 cores, 2 chips, 20 cores/chip, 2 threads/core	File System:	xfs
CPU(s) orderable:	1,2 chip	System State:	Run level 3 (multi-user)
Primary Cache:	32 KB I + 32 KB D on chip per core	Base Pointers:	32-bit
Secondary Cache:	256 KB I+D on chip per core	Peak Pointers:	32/64-bit
L3 Cache:	50 MB I+D on chip per chip	Other Software:	Microquill SmartHeap V10.2
Other Cache:	None		
Memory:	256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)		
Disk Subsystem:	1 x 250 GB 7200 RPM SATA HDD		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 1590**

PowerEdge FC630 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECint\_rate\_base2006 = 1530**

CPU2006 license: 55

Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	646	1210	645	1210	<b>646</b>	<b>1210</b>	80	526	1490	527	1480	<b>526</b>	<b>1480</b>
401.bzip2	80	980	788	973	794	<b>976</b>	<b>791</b>	80	940	821	942	819	<b>942</b>	<b>820</b>
403.gcc	80	567	1140	<b>568</b>	<b>1130</b>	568	1130	80	563	1140	<b>567</b>	<b>1140</b>	568	1130
429.mcf	80	372	1960	<b>371</b>	<b>1970</b>	370	1970	80	372	1960	<b>371</b>	<b>1970</b>	370	1970
445.gobmk	80	762	1100	761	1100	<b>761</b>	<b>1100</b>	80	749	<b>1120</b>	749	1120	751	1120
456.hammer	80	<b>367</b>	<b>2040</b>	368	2030	366	2040	80	337	2220	336	2220	<b>336</b>	<b>2220</b>
458.sjeng	80	843	1150	845	1150	<b>843</b>	<b>1150</b>	80	805	1200	<b>806</b>	<b>1200</b>	806	1200
462.libquantum	80	<b>103</b>	<b>16100</b>	103	16000	103	16100	80	<b>103</b>	<b>16100</b>	103	16000	103	16100
464.h264ref	80	901	1960	<b>908</b>	<b>1950</b>	910	1950	80	<b>878</b>	<b>2020</b>	864	2050	879	2010
471.omnetpp	80	674	741	<b>675</b>	<b>741</b>	676	740	80	653	765	655	764	<b>654</b>	<b>765</b>
473.astar	80	<b>662</b>	<b>848</b>	662	848	661	849	80	<b>662</b>	<b>848</b>	662	848	661	849
483.xalancbmk	80	<b>351</b>	<b>1570</b>	352	1570	350	1580	80	<b>351</b>	<b>1570</b>	352	1570	350	1580

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die

Virtualization Technology disabled

System Profile set to custom

CPU Power Management set to Hardware P States

C States set to Autonomous

C1E disabled

Energy Efficient Turbo disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Balanced Performance

Memory Patrol Scrub disabled

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Mon Jul 11 12:32:56 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 1590**

PowerEdge FC630 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECint\_rate\_base2006 = 1530**

**CPU2006 license:** 55

**Test date:** Jul-2016

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2016

**Tested by:** Dell Inc.

**Software Availability:** Nov-2015

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2698 v4 @ 2.20GHz
  2 "physical id"s (chips)
  80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 20
  siblings : 40
  physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
  physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264038896 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.2 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.2"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 11 11:48
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2        xfs   230G  8.3G  221G   4%  /
```

```
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.2.1 06/07/2016

Memory:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 1590**

PowerEdge FC630 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECint\_rate\_base2006 = 1530**

**CPU2006 license:** 55

**Test date:** Jul-2016

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2016

**Tested by:** Dell Inc.

**Software Availability:** Nov-2015

## Platform Notes (Continued)

8x 00CE00B300CE M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz  
16x Not Specified Not Specified

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hammer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 1590**

PowerEdge FC630 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECint\_rate\_base2006 = 1530**

CPU2006 license: 55

Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

```
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
403.gcc: -D_FILE_OFFSET_BITS=64
```

```
429.mcf: -D_FILE_OFFSET_BITS=64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -D_FILE_OFFSET_BITS=64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -D_FILE_OFFSET_BITS=64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 1590**

PowerEdge FC630 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECint\_rate\_base2006 = 1530**

CPU2006 license: 55

Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC630 (Intel Xeon E5-2698 v4, 2.20 GHz)

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

**SPECint\_rate2006 = 1590**

**SPECint\_rate\_base2006 = 1530**

**Test date:** Jul-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Nov-2015

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Aug 24 13:13:58 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 August 2016.