



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL580 Gen9
(2.40 GHz, Intel Xeon E7-8867 v4)

SPECint_rate2006 = 3060

SPECint_rate_base2006 = 2940

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

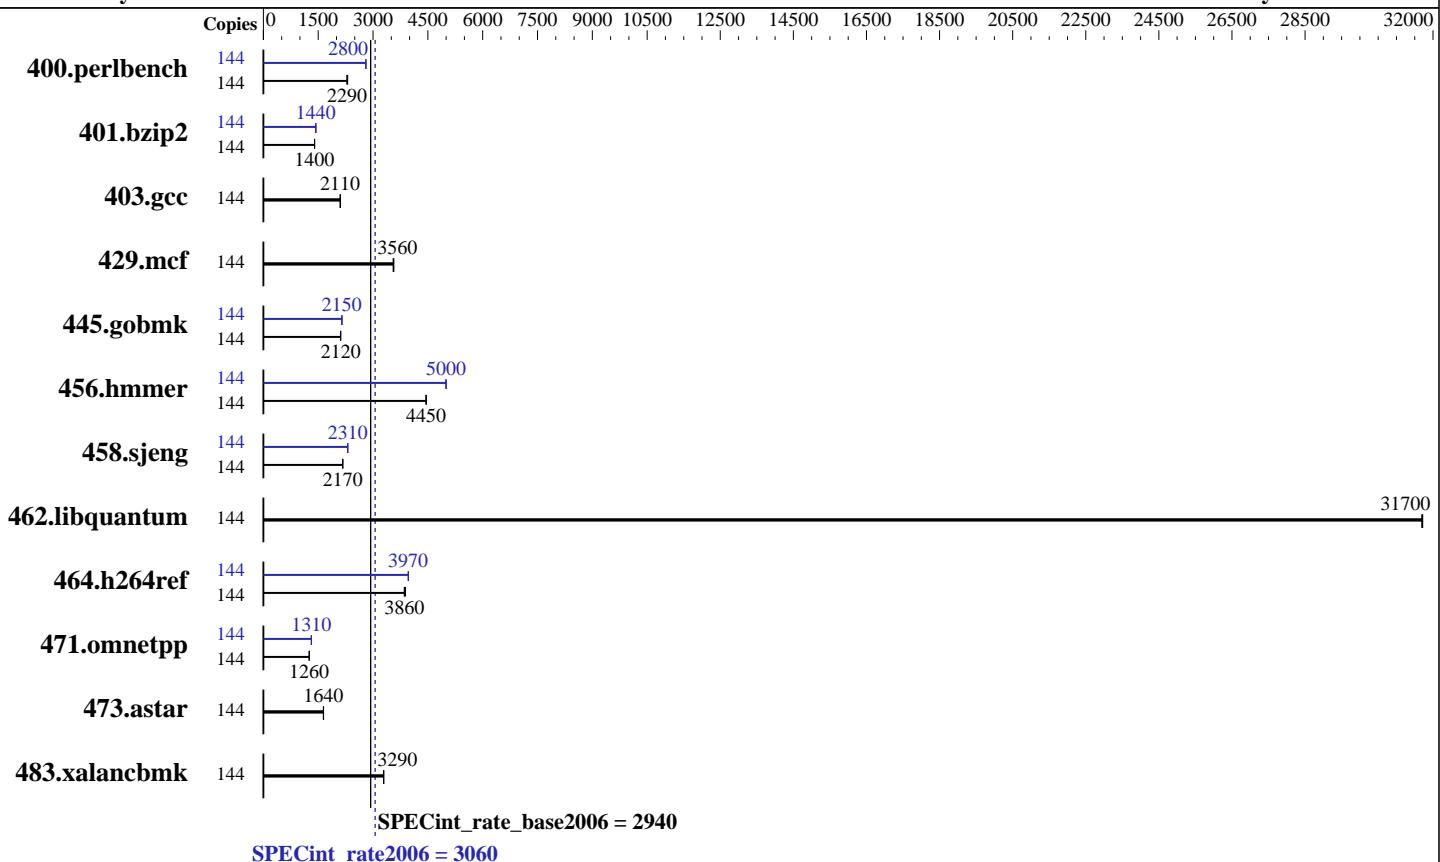

Hardware

CPU Name: Intel Xeon E7-8867 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R, running at 1600 MHz)
Disk Subsystem: 1 x 800 GB NVMe PCIe SSD, RAID 0
Other Hardware: DL580 Gen9 NVMe SSD Express Bay Enablement Kit

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1, Kernel 3.12.49-11-default
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL580 Gen9
(2.40 GHz, Intel Xeon E7-8867 v4)

SPECint_rate2006 = 3060

SPECint_rate_base2006 = 2940

CPU2006 license: 3

Test date: Jul-2016

Test sponsor: HPE

Hardware Availability: Jun-2016

Tested by: HPE

Software Availability: Dec-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	144	610	2310	616	2290	614	2290	144	501	2810	502	2800	502	2800
401.bzip2	144	992	1400	992	1400	992	1400	144	968	1440	971	1430	967	1440
403.gcc	144	551	2110	553	2100	549	2110	144	551	2110	553	2100	549	2110
429.mcf	144	369	3560	370	3550	368	3570	144	369	3560	370	3550	368	3570
445.gobmk	144	714	2120	714	2120	716	2110	144	703	2150	703	2150	703	2150
456.hammer	144	302	4450	302	4450	301	4460	144	269	5000	269	5000	269	5000
458.sjeng	144	803	2170	802	2170	803	2170	144	755	2310	755	2310	755	2310
462.libquantum	144	94.1	31700	94.1	31700	94.1	31700	144	94.1	31700	94.1	31700	94.1	31700
464.h264ref	144	827	3850	825	3860	820	3890	144	804	3970	804	3960	803	3970
471.omnetpp	144	717	1260	717	1260	718	1250	144	685	1310	687	1310	685	1310
473.astar	144	615	1640	616	1640	614	1650	144	615	1640	616	1640	614	1650
483.xalancbmk	144	302	3290	302	3290	302	3290	144	302	3290	302	3290	302	3290

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Platform Notes

BIOS Configuration:

HP Power Profile set to Custom

HP Power Regulator to HP Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C6 State

Minimum Processor Idle Power Package C-State set to No Package State

QPI Snoop Configuration set to Cluster On Die

Collaborative Power Control set to Disabled

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Sysinfo program /home/intel_binary/cpu2006/config/sysinfo.rev6914

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.40 GHz, Intel Xeon E7-8867 v4)

SPECint_rate2006 = 3060

SPECint_rate_base2006 = 2940

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Platform Notes (Continued)

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-vi0i Thu Jul 14 16:58:41 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7-8867 v4 @ 2.40GHz
        4 "physical id"s (chips)
        144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 18
    siblings   : 36
    physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 23040 KB
```

```
From /proc/meminfo
MemTotal:      529308980 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-vi0i 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 14 16:52
```

```
SPEC is set to: /home/intel_binary/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
Continued on next page
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.40 GHz, Intel Xeon E7-8867 v4)

SPECint_rate2006 = 3060

SPECint_rate_base2006 = 2940

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Platform Notes (Continued)

```
/dev/nvme0n1p4 xfs 703G 35G 669G 5% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U17 05/16/2016

Memory:

```
64x UNKNOWN NOT AVAILABLE
32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1600 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:
32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1600 MHz

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/intel_binary/cpu2006/libs/32:/home/intel_binary/cpu2006/libs/64:/home/intel_binary/cpu2006/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmr: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL580 Gen9
(2.40 GHz, Intel Xeon E7-8867 v4)

SPECint_rate2006 = 3060

SPECint_rate_base2006 = 2940

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Base Portability Flags (Continued)

473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL580 Gen9
(2.40 GHz, Intel Xeon E7-8867 v4)

SPECint_rate2006 = 3060

SPECint_rate_base2006 = 2940

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Peak Portability Flags (Continued)

```

445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
            -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
            -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
            -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
              -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.40 GHz, Intel Xeon E7-8867 v4)

SPECint_rate2006 = 3060

SPECint_rate_base2006 = 2940

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

471.omnetpp (continued):

```
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Aug 24 13:14:32 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 August 2016.