



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

**SPECint\_rate2006 = 5990**

PRIMEQUEST 2800E3, Intel Xeon E7-8867 v4, 2.40 GHz

**SPECint\_rate\_base2006 = 5770**

CPU2006 license: 19


**Test date:** Jun-2016

**Test sponsor:** Fujitsu

**Hardware Availability:** Jun-2016

**Tested by:** Fujitsu

**Software Availability:** Sep-2015

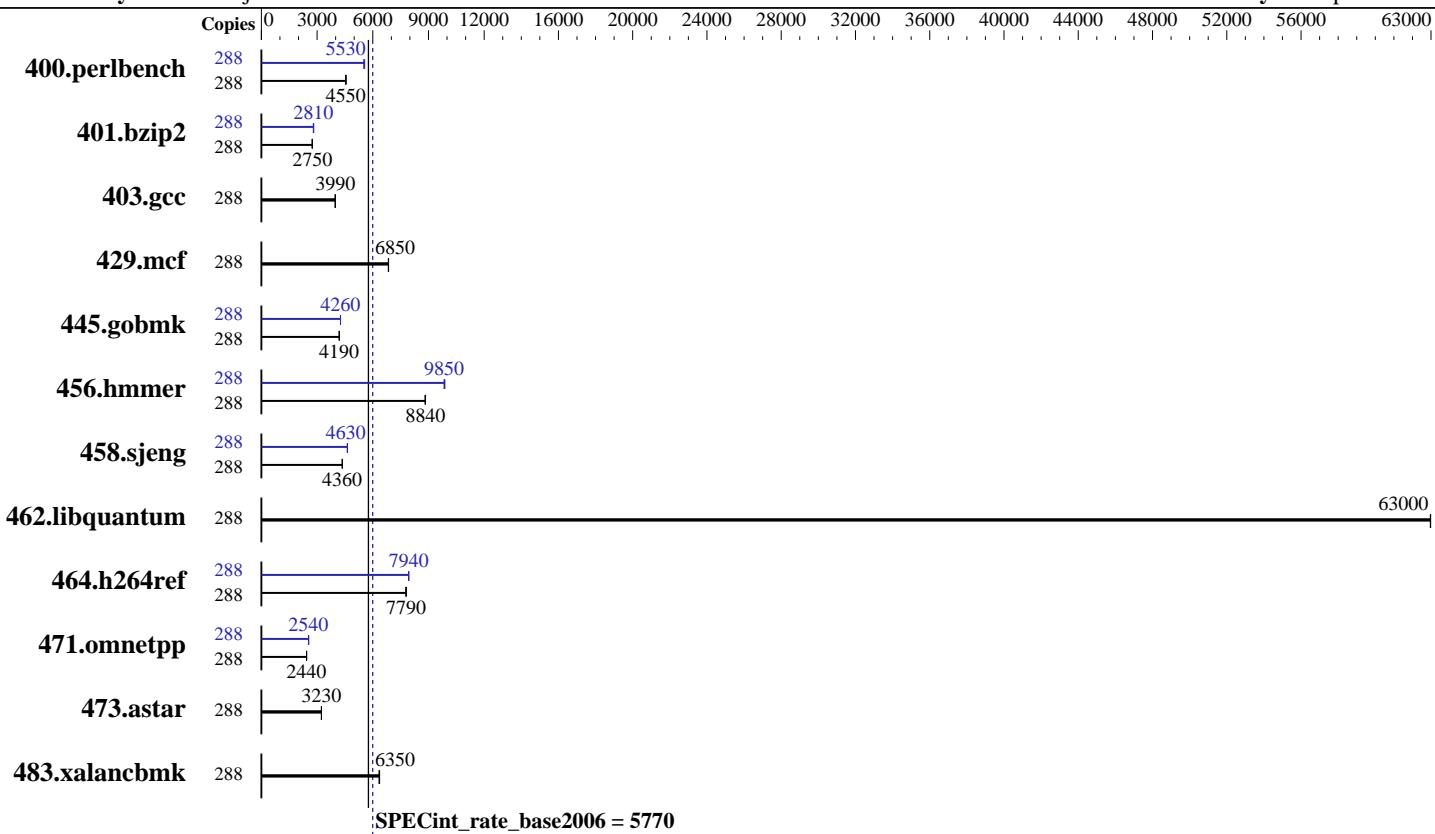

## Hardware

CPU Name: Intel Xeon E7-8867 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 144 cores, 8 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4,6,8 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2400T-R, running at 1600 MHz)  
 Disk Subsystem: 1 x SATA, 1000 GB, 10000 RPM  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 Kernel 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8867 v4, 2.40 GHz

**SPECint\_rate2006 = 5990**

**SPECint\_rate\_base2006 = 5770**

CPU2006 license: 19

Test date: Jun-2016

Test sponsor: Fujitsu

Hardware Availability: Jun-2016

Tested by: Fujitsu

Software Availability: Sep-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	288	620	4540	616	4560	<b><u>618</u></b>	<b><u>4550</u></b>	288	506	5560	509	5530	<b><u>509</u></b>	<b><u>5530</u></b>
401.bzip2	288	1019	2730	1010	2750	<b><u>1011</u></b>	<b><u>2750</u></b>	288	994	2800	<b><u>989</u></b>	<b><u>2810</u></b>	986	2820
403.gcc	288	581	3990	585	3970	<b><u>582</u></b>	<b><u>3990</u></b>	288	581	3990	585	3970	<b><u>582</u></b>	<b><u>3990</u></b>
429.mcf	288	<b><u>384</u></b>	<b><u>6850</u></b>	384	6840	383	6850	288	<b><u>384</u></b>	<b><u>6850</u></b>	384	6840	383	6850
445.gobmk	288	721	4190	<b><u>721</u></b>	<b><u>4190</u></b>	720	4200	288	<b><u>709</u></b>	<b><u>4260</u></b>	709	4260	709	4260
456.hammer	288	<b><u>304</u></b>	<b><u>8840</u></b>	305	8810	304	8840	288	<b><u>273</u></b>	9850	272	9880	<b><u>273</u></b>	<b><u>9850</u></b>
458.sjeng	288	799	4360	<b><u>800</u></b>	<b><u>4360</u></b>	800	4360	288	<b><u>752</u></b>	<b><u>4630</u></b>	753	4630	<b><u>752</u></b>	4640
462.libquantum	288	94.7	63000	94.8	63000	<b><u>94.8</u></b>	<b><u>63000</u></b>	288	94.7	63000	94.8	63000	<b><u>94.8</u></b>	<b><u>63000</u></b>
464.h264ref	288	819	7780	<b><u>818</u></b>	<b><u>7790</u></b>	816	7810	288	803	7930	<b><u>803</u></b>	<b><u>7940</u></b>	803	7940
471.omnetpp	288	741	2430	<b><u>739</u></b>	<b><u>2440</u></b>	738	2440	288	<b><u>707</u></b>	2550	<b><u>708</u></b>	<b><u>2540</u></b>	708	2540
473.astar	288	625	3230	625	3230	<b><u>625</u></b>	<b><u>3230</u></b>	288	625	3230	625	3230	<b><u>625</u></b>	<b><u>3230</u></b>
483.xalancbmk	288	<b><u>313</u></b>	<b><u>6350</u></b>	312	6370	313	6350	288	<b><u>313</u></b>	<b><u>6350</u></b>	312	6370	313	6350

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Energy Performance = Performance

Uncore Frequency Override = Maximum

Sysinfo program /home/SPECcpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-8do3 Fri Jun 24 14:13:18 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8867 v4 @ 2.40GHz

8 "physical id"s (chips)

288 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8867 v4, 2.40 GHz

**SPECint\_rate2006 = 5990**

**SPECint\_rate\_base2006 = 5770**

**CPU2006 license:** 19

**Test date:** Jun-2016

**Test sponsor:** Fujitsu

**Hardware Availability:** Jun-2016

**Tested by:** Fujitsu

**Software Availability:** Sep-2015

## Platform Notes (Continued)

```
caution.)  
    cpu cores : 18  
    siblings   : 36  
    physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
    physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
    physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
    physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
    physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
    physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
    physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
    physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
    cache size : 46080 KB  
  
From /proc/meminfo  
MemTotal:      1058678360 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
/usr/bin/lsb_release -d  
  SUSE Linux Enterprise Server 12 SP1  
  
From /etc/*release* /etc/*version*  
SuSE-release:  
  SUSE Linux Enterprise Server 12 (x86_64)  
  VERSION = 12  
  PATCHLEVEL = 1  
  # This file is deprecated and will be removed in a future service pack or  
  release.  
  # Please check /etc/os-release for details about this release.  
os-release:  
  NAME="SLES"  
  VERSION="12-SP1"  
  VERSION_ID="12.1"  
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"  
  ID="sles"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:12:sp1"  
  
uname -a:  
  Linux linux-8do3 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015  
  (8d714a0) x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Jun 24 14:10 last=5  
  
SPEC is set to: /home/SPECcpu2006  
Filesystem      Type  Size Used Avail Use% Mounted on  
 /dev/sda4        xfs  982G  9.3G  973G   1% /home  
Additional information from dmidecode:  
  
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
Continued on next page
```



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8867 v4, 2.40 GHz

**SPECint\_rate2006 = 5990**

**SPECint\_rate\_base2006 = 5770**

CPU2006 license: 19

Test date: Jun-2016

Test sponsor: Fujitsu

Hardware Availability: Jun-2016

Tested by: Fujitsu

Software Availability: Sep-2015

## Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU PRIMEQUEST 2000 Series BIOS Version 81.14 04/18/2016

Memory:

64x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at 1600 MHz  
128x Not Specified Not Specified

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmr: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8867 v4, 2.40 GHz

**SPECint\_rate2006 = 5990**

**SPECint\_rate\_base2006 = 5770**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Sep-2015

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

```
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
403.gcc: -D_FILE_OFFSET_BITS=64
```

```
429.mcf: -D_FILE_OFFSET_BITS=64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -D_FILE_OFFSET_BITS=64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -D_FILE_OFFSET_BITS=64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8867 v4, 2.40 GHz

**SPECint\_rate2006 = 5990**

**SPECint\_rate\_base2006 = 5770**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Sep-2015

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8867 v4, 2.40 GHz

**SPECint\_rate2006 = 5990**

**SPECint\_rate\_base2006 = 5770**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Sep-2015

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 6 16:55:35 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 September 2016.