SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6 Essential
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECint®_rate2006 = 3040

SPECint_rate_base2006 = 2950

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Jul-2016
Hardware Availability: Jul-2016
Software Availability: Mar-2015

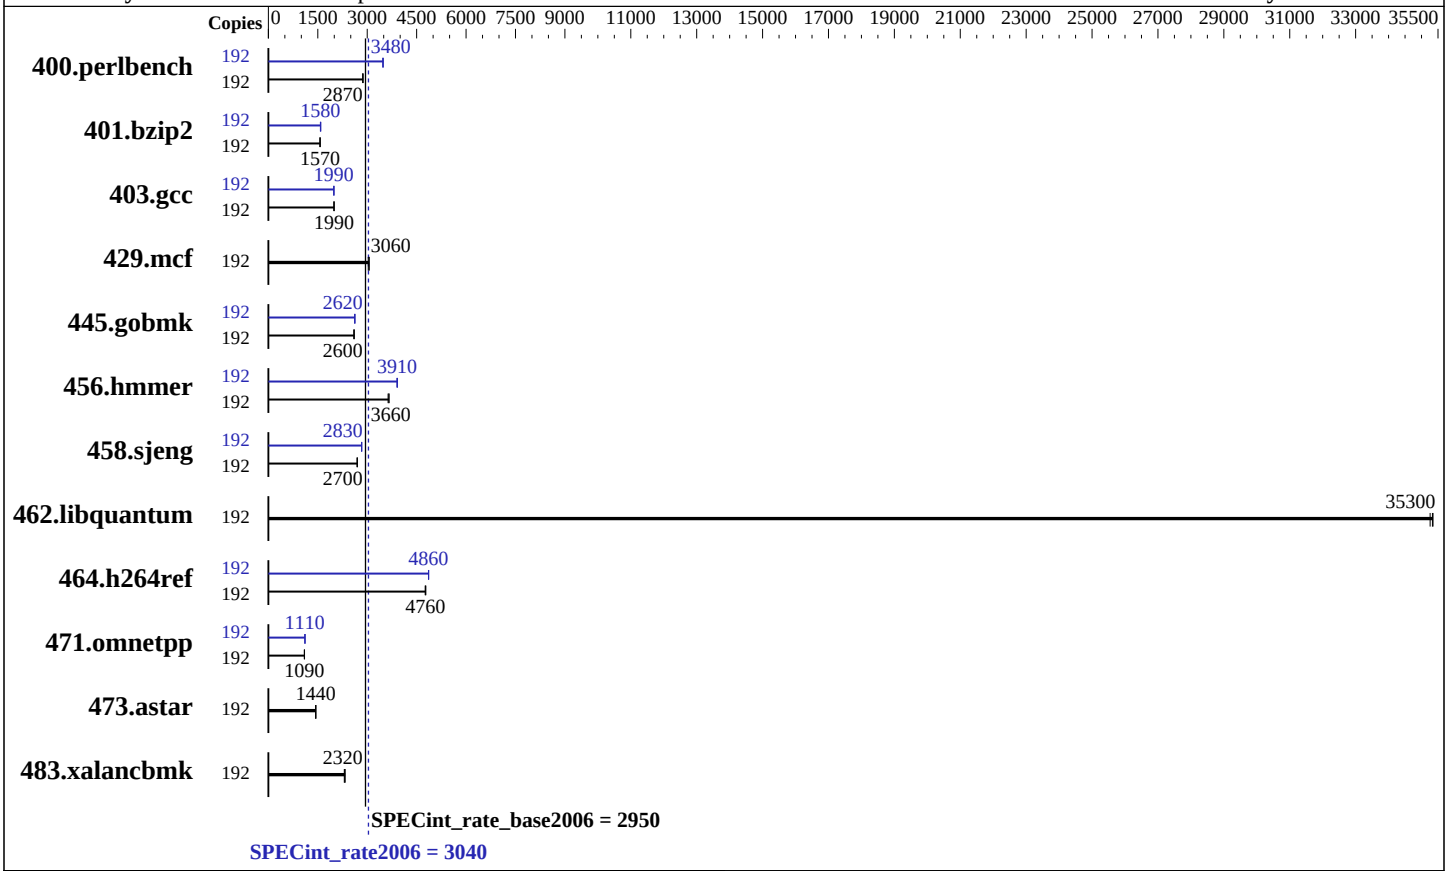

Hardware

CPU Name:	Intel Xeon E7-8890 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	96 cores, 4 chips, 24 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	60 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) Kernel 3.12.49-11-default
Compiler:	C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6 Essential
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECint_rate2006 = 3040

SPECint_rate_base2006 = 2950

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Jul-2016
Hardware Availability: Jul-2016
Software Availability: Mar-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	192	655	2870	**655**	**2870**	653	2870	192	**540**	**3480**	540	3480	538	3490
401.bzip2	192	1182	1570	1180	1570	**1182**	**1570**	192	1173	1580	1163	1590	**1172**	**1580**
403.gcc	192	776	1990	**776**	**1990**	775	1990	192	779	1980	**777**	**1990**	777	1990
429.mcf	192	**573**	**3060**	578	3030	573	3060	192	**573**	**3060**	578	3030	573	3060
445.gobmk	192	773	2610	**775**	**2600**	776	2600	192	766	2630	769	2620	**768**	**2620**
456.hmmer	192	493	3630	489	3660	**490**	**3660**	192	**458**	**3910**	457	3920	459	3900
458.sjeng	192	862	2700	**861**	**2700**	861	2700	192	820	2830	821	2830	**821**	**2830**
462.libquantum	192	113	35300	**113**	**35300**	113	35300	192	113	35300	**113**	**35300**	113	35300
464.h264ref	192	889	4780	**892**	**4760**	892	4760	192	**874**	**4860**	874	4860	873	4870
471.omnetpp	192	1094	1100	**1098**	**1090**	1099	1090	192	1082	1110	1080	1110	**1080**	**1110**
473.astar	192	**937**	**1440**	939	1440	936	1440	192	**937**	**1440**	939	1440	936	1440
483.xalancbmk	192	575	2300	**572**	**2320**	569	2330	192	575	2300	**572**	**2320**	569	2330

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
```

Platform Notes

```
BIOS Configuration:
 Operating Mode set to "Maximum Performance"
 COD Preference set to Enabled
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on Draco-02 Fri Jul  8 17:59:11 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz
```

Continued on next page

Platform Notes (Continued)

```
        4 "physical id"s (chips)
        192 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 24
        siblings  : 48
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
        27 28 29
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
        27 28 29
        physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
        27 28 29
        physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
        27 28 29
     cache size : 30720 KB

  From /proc/meminfo
     MemTotal:       529148996 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 1
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP1"
        VERSION_ID="12.1"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp1"

  uname -a:
     Linux Draco-02 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
     (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jul 8 17:57

  SPEC is set to: /home/cpu2006-1.2-ic16.0
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda4      xfs   688G  4.9G  683G   1% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
```

Continued on next page

Platform Notes (Continued)

```
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS LENOVO -[A9E135CUS-3.10]- 06/16/2016
    Memory:
     16x Hynix HMA84GR7MFR4N-UH 32 GB 2 rank 2400 MHz, configured at 1600 MHz
     80x NO DIMM Unknown

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

 Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB
 memory using RedHat EL 7.2 glibc 2.17
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
    400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
      401.bzip2: -D_FILE_OFFSET_BITS=64
        403.gcc: -D_FILE_OFFSET_BITS=64
        429.mcf: -D_FILE_OFFSET_BITS=64
      445.gobmk: -D_FILE_OFFSET_BITS=64
      456.hmmer: -D_FILE_OFFSET_BITS=64
      458.sjeng: -D_FILE_OFFSET_BITS=64
  462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
    464.h264ref: -D_FILE_OFFSET_BITS=64
    471.omnetpp: -D_FILE_OFFSET_BITS=64
      473.astar: -D_FILE_OFFSET_BITS=64
  483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 6 16:58:04 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 September 2016.