SPEC® CFP2006 Result

Huawei

Huawei XH628 V3 (Intel Xeon E5-2699 v4)

SPECfp®_rate2006 = 1130

SPECfp_rate_base2006 = 1100

CPU2006 license:	3175	**Test date:**	Nov-2016
Test sponsor:	Huawei	**Hardware Availability:**	Apr-2016
Tested by:	Huawei	**Software Availability:**	Dec-2015

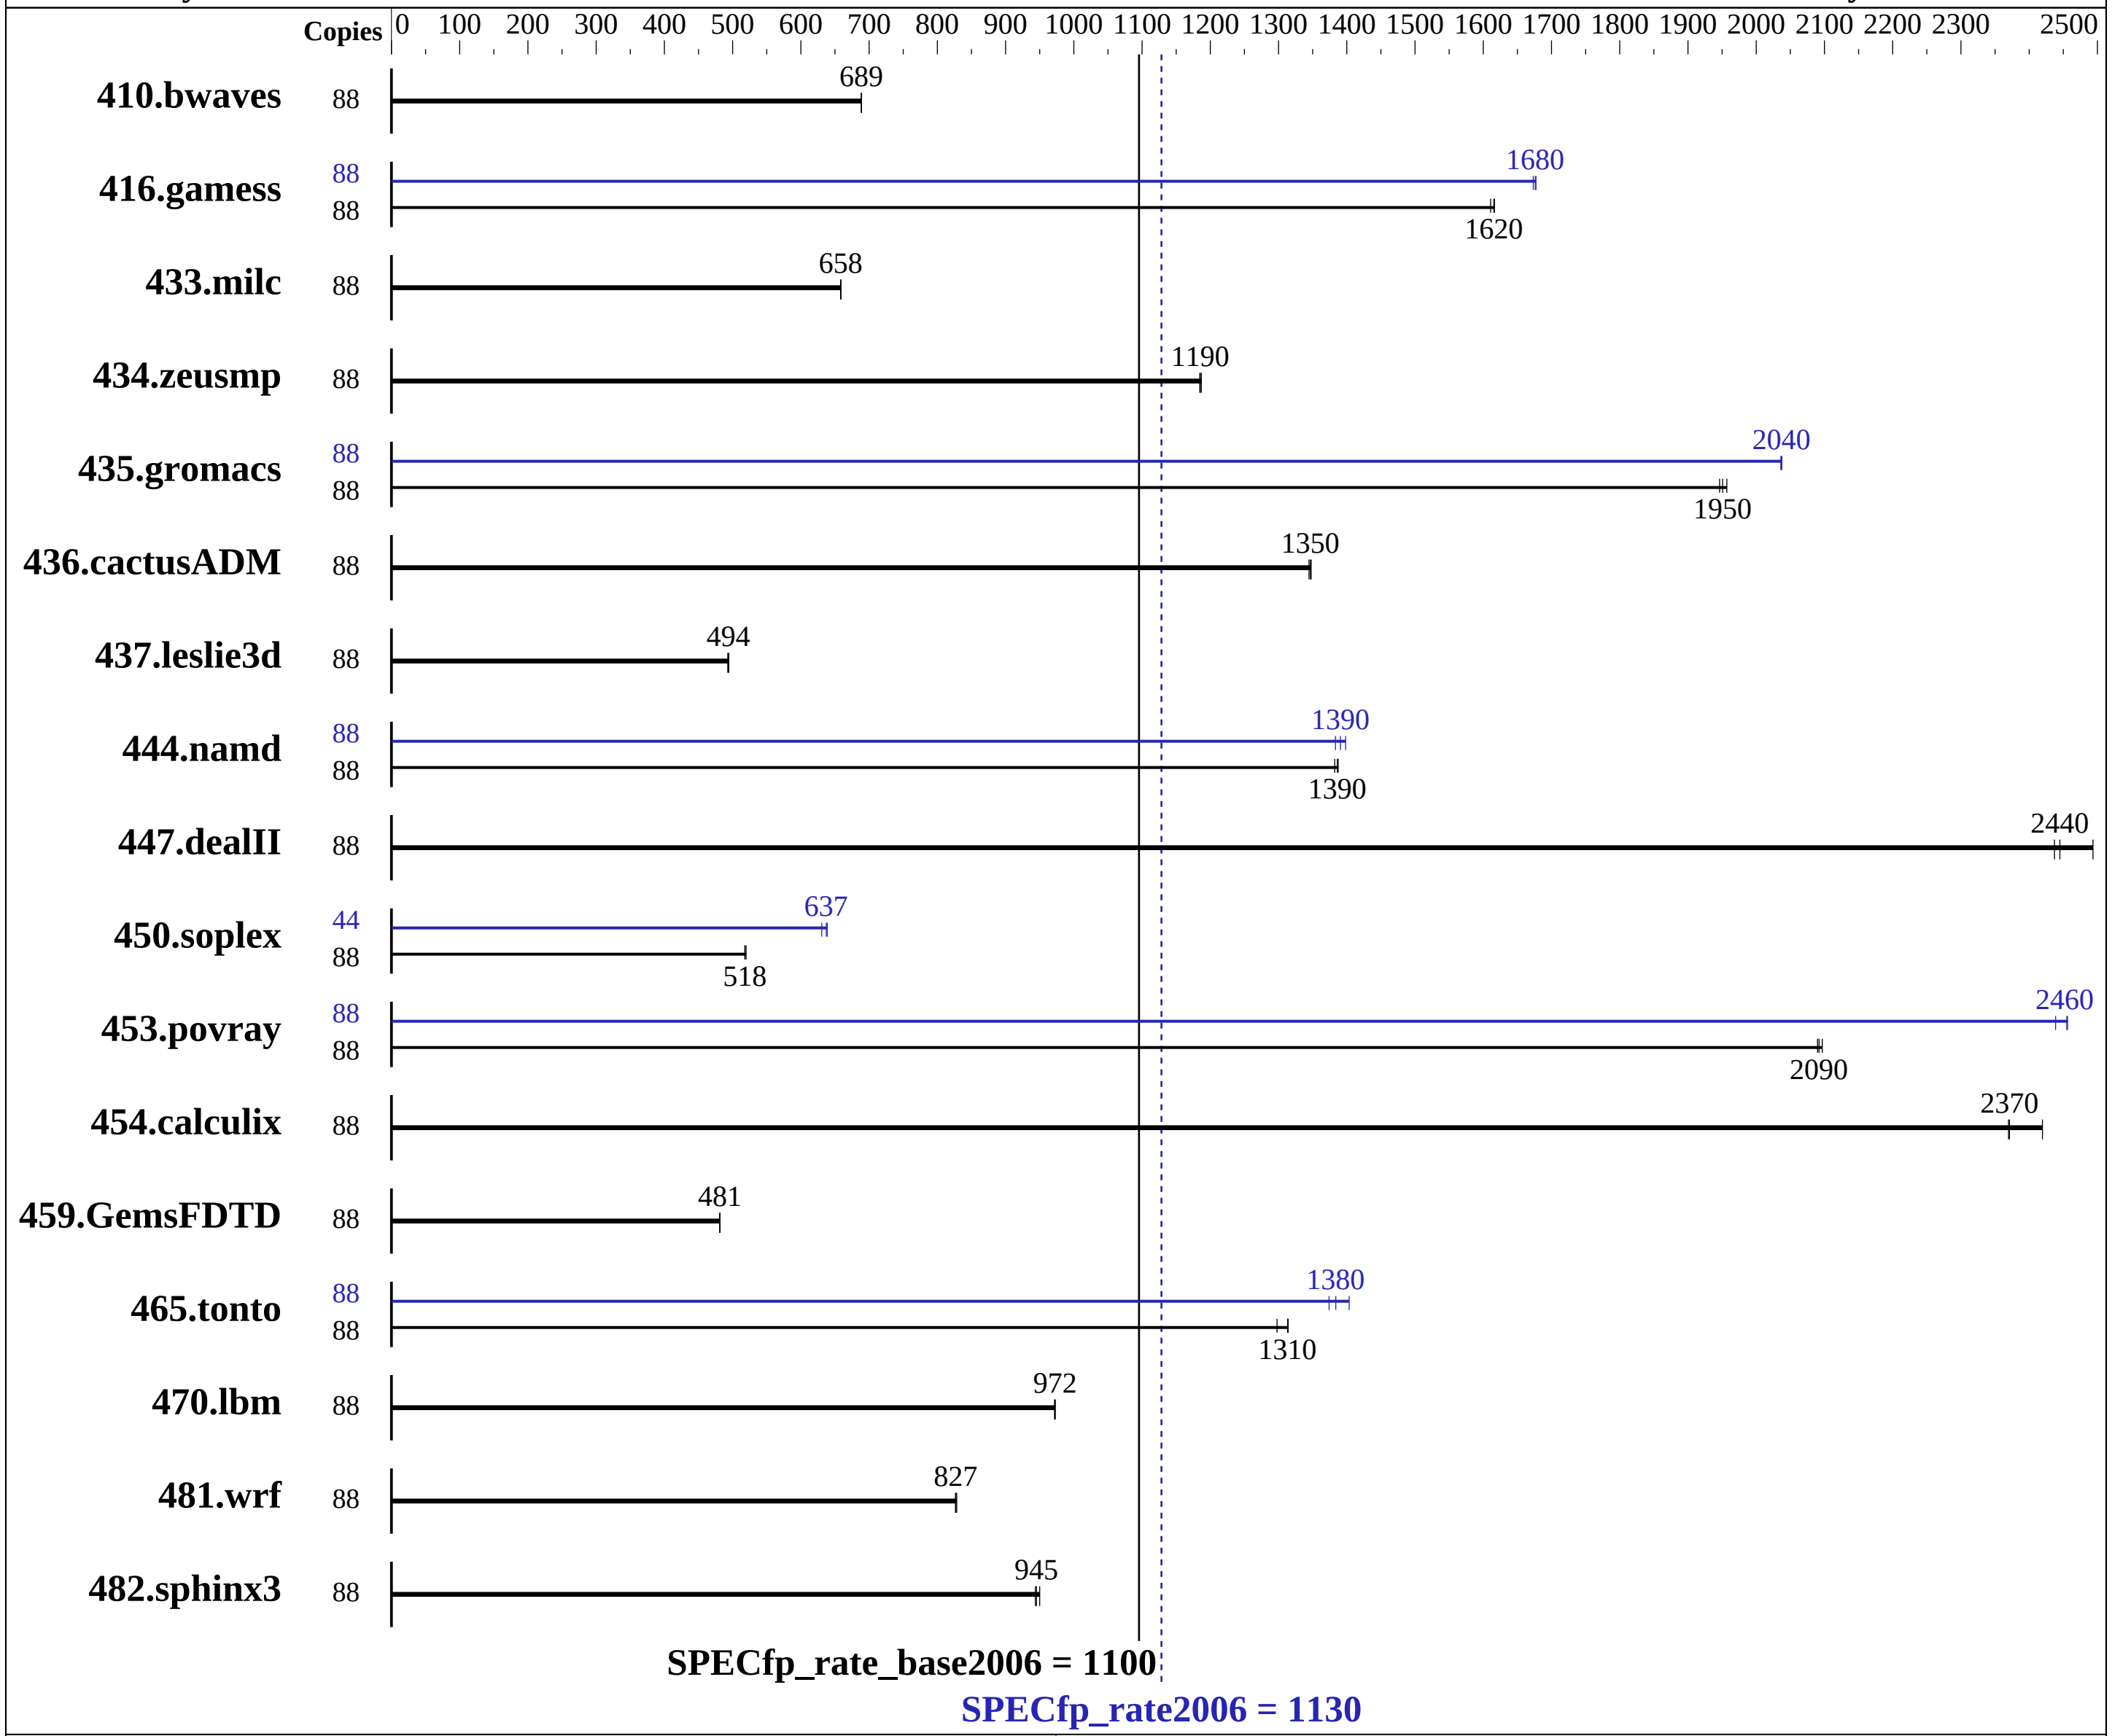

Hardware

CPU Name:	Intel Xeon E5-2699 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	44 cores, 2 chips, 22 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

Huawei

Huawei XH628 V3 (Intel Xeon E5-2699 v4)

SPECfp_rate2006 = 1130

SPECfp_rate_base2006 = 1100

CPU2006 license: 3175		**Test date:**	Nov-2016
Test sponsor:	Huawei	**Hardware Availability:**	Apr-2016
Tested by:	Huawei	**Software Availability:**	Dec-2015

L3 Cache:	55 MB I+D on chip per chip	Base Pointers:	32/64-bit
Other Cache:	None	Peak Pointers:	32/64-bit
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)	Other Software:	None
Disk Subsystem:	1 x 1000 GB SATA, 7200 RPM		
Other Hardware:	None		

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88	1736	689	1736	689	**1736**	**689**	88	1736	689	1736	689	**1736**	**689**
416.gamess	88	1070	1610	1066	1620	**1066**	**1620**	88	1027	1680	1030	1670	**1028**	**1680**
433.milc	88	**1227**	**658**	1226	659	1227	658	88	**1227**	**658**	1226	659	1227	658
434.zeusmp	88	676	1180	675	1190	**676**	**1190**	88	676	1180	675	1190	**676**	**1190**
435.gromacs	88	321	1960	**322**	**1950**	323	1950	88	**308**	**2040**	309	2040	308	2040
436.cactusADM	88	782	1340	780	1350	**781**	**1350**	88	782	1340	780	1350	**781**	**1350**
437.leslie3d	88	**1675**	**494**	1673	494	1678	493	88	**1675**	**494**	1673	494	1678	493
444.namd	88	509	1390	**509**	**1390**	511	1380	88	505	1400	**507**	**1390**	510	1380
447.dealII	88	413	2440	404	2490	**412**	**2440**	88	413	2440	404	2490	**412**	**2440**
450.soplex	88	**1417**	**518**	1417	518	1412	520	44	582	631	575	639	**576**	**637**
453.povray	88	224	2090	223	2100	**224**	**2090**	88	192	2440	191	2460	**191**	**2460**
454.calculix	88	300	2420	306	2370	**306**	**2370**	88	300	2420	306	2370	**306**	**2370**
459.GemsFDTD	88	**1940**	**481**	1939	481	1940	481	88	**1940**	**481**	1939	481	1940	481
465.tonto	88	**659**	**1310**	659	1310	667	1300	88	**626**	**1380**	617	1400	630	1370
470.lbm	88	1244	972	**1243**	**972**	1243	973	88	1244	972	**1243**	**972**	1243	973
481.wrf	88	**1189**	**827**	1187	828	1189	827	88	**1189**	**827**	1187	828	1189	827
482.sphinx3	88	1817	944	**1814**	**945**	1805	950	88	1817	944	**1814**	**945**	1805	950

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Set Snoop Mode to COD mode
```

Continued on next page

Platform Notes (Continued)

```
Set Patrol Scrub to Disable
Sysinfo program /spec16/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-6392 Sun Nov  6 10:15:41 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
      2 "physical id"s (chips)
      88 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 22
      siblings  : 44
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
      28
      physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
      28
   cache size : 28160 KB

From /proc/meminfo
   MemTotal:       528839004 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
   Linux linux-6392 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
 run-level 3 Nov 5 11:08 last=5

 SPEC is set to: /spec16
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/md126p2   xfs   455G   21G  434G   5% /
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS Insyde Corp. 3.31 08/22/2016
   Memory:
    16x Micron 36ASF4G72PZ-2G3A1 32 GB 2 rank 2400 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec16/libs/32:/spec16/libs/64:/spec16/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 The Huawei XH622 V3 and Huawei XH628 V3 and Huawei XH620 V3
 are electronically equivalent.
 The results have been measured on a Huawei XH620 V3 model.
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 30 10:46:32 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 November 2016.