SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1028R-MCTR
(X10DRL-CT , Intel Xeon E5-2620 v4)

SPECfp®_rate2006 = 576

SPECfp_rate_base2006 = 565

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

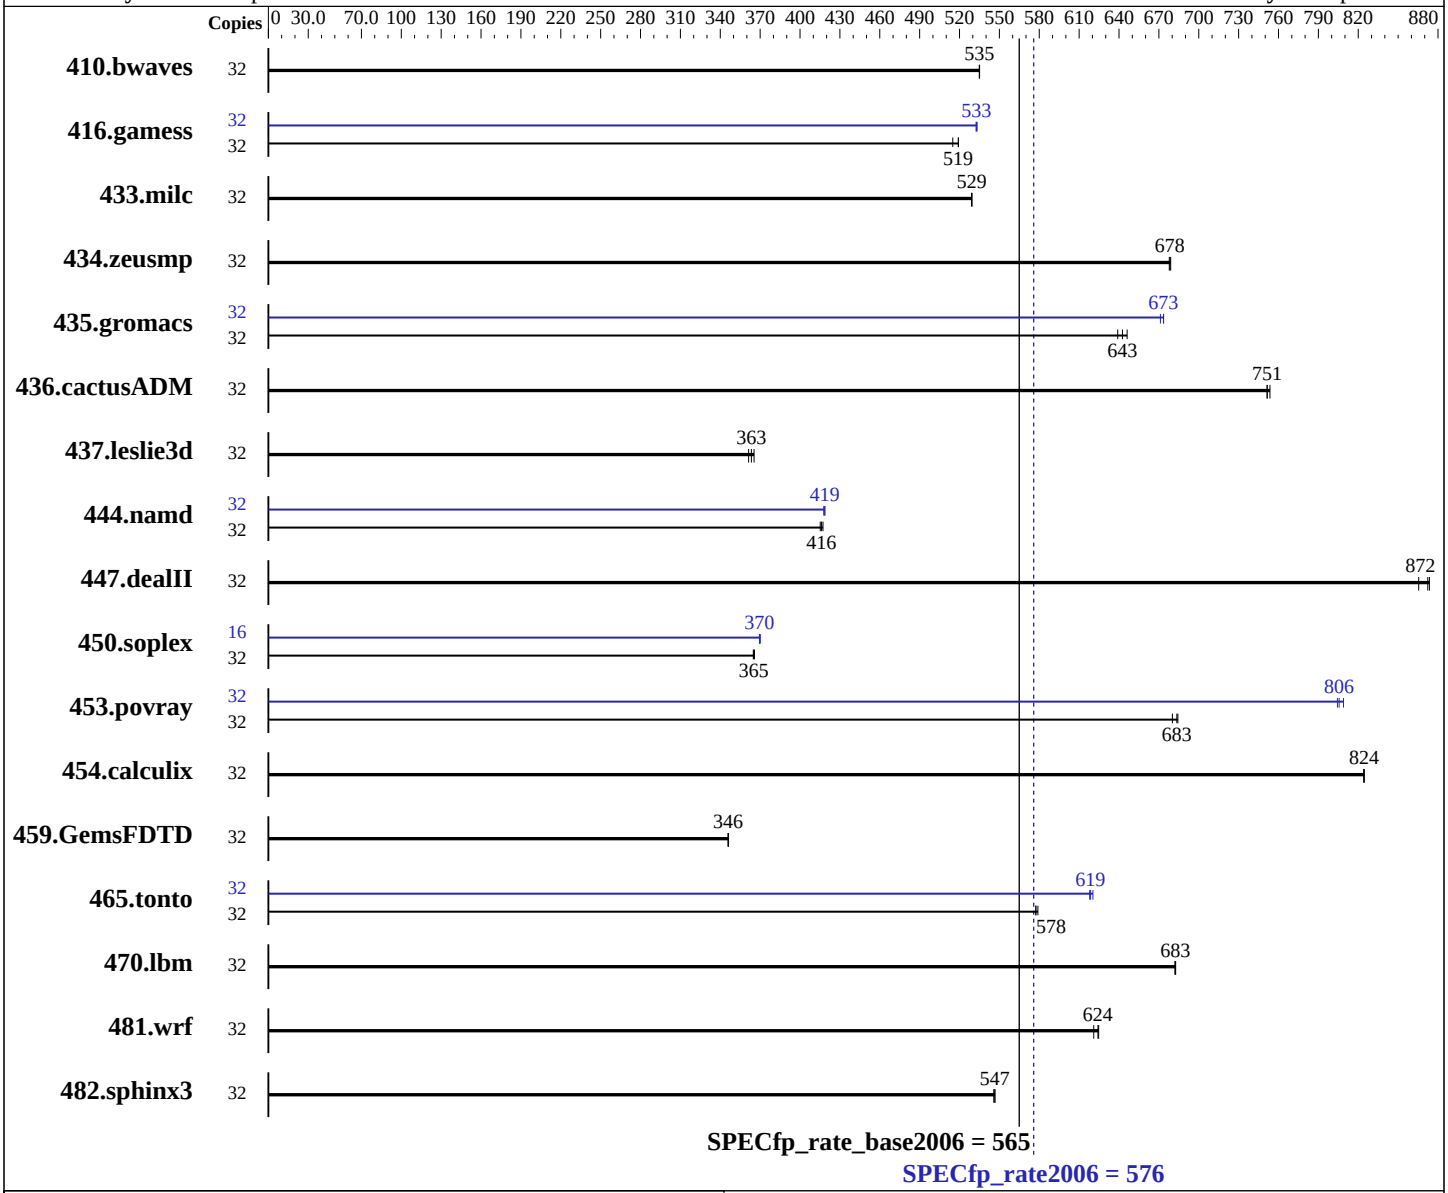

Hardware

CPU Name:	Intel Xeon E5-2620 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2, Kernel 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1028R-MCTR
(X10DRL-CT , Intel Xeon E5-2620 v4)

SPECfp_rate2006 = 576

SPECfp_rate_base2006 = 565

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 1 x 240 GB SATA III SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	**813**	**535**	813	535	813	535	32	**813**	**535**	813	535	813	535
416.gamess	32	1217	515	1207	519	**1207**	**519**	32	1177	532	1175	533	**1176**	**533**
433.milc	32	555	529	**555**	**529**	555	529	32	555	529	**555**	**529**	555	529
434.zeusmp	32	**429**	**678**	430	678	429	679	32	**429**	**678**	430	678	429	679
435.gromacs	32	354	646	358	639	**356**	**643**	32	339	674	340	671	**339**	**673**
436.cactusADM	32	**509**	**751**	507	754	509	751	32	**509**	**751**	507	754	509	751
437.leslie3d	32	833	361	**828**	**363**	823	365	32	833	361	**828**	**363**	823	365
444.namd	32	615	417	618	415	**617**	**416**	32	614	418	**613**	**419**	613	419
447.dealII	32	**420**	**872**	419	874	423	865	32	**420**	**872**	419	874	423	865
450.soplex	32	730	366	731	365	**731**	**365**	16	361	369	**361**	**370**	361	370
453.povray	32	**249**	**683**	250	680	249	684	32	**211**	**806**	212	804	210	809
454.calculix	32	**320**	**824**	320	824	320	824	32	**320**	**824**	320	824	320	824
459.GemsFDTD	32	**981**	**346**	981	346	982	346	32	**981**	**346**	981	346	982	346
465.tonto	32	**545**	**578**	545	577	544	579	32	510	618	**509**	**619**	508	620
470.lbm	32	645	682	**644**	**683**	644	683	32	645	682	**644**	**683**	644	683
481.wrf	32	576	621	572	625	**573**	**624**	32	576	621	572	625	**573**	**624**
482.sphinx3	32	1141	547	**1141**	**547**	1143	546	32	1141	547	**1141**	**547**	1143	546

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Early Snoop = Disable
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
```

Continued on next page

Platform Notes (Continued)

```
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on X10DRL-CT Fri Nov  4 18:23:31 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       131919888 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux X10DRL-CT 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 4 10:07

SPEC is set to: /usr/cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      xfs   220G   34G  186G  16% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
```

Continued on next page

Platform Notes (Continued)

```
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS American Megatrends Inc. 2.0 12/18/2015
   Memory:
    8x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at
    2133 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
   435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
```

Continued on next page

Base Portability Flags (Continued)

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 29 19:07:59 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 November 2016.