SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei CH226 V3(Intel Xeon E5-2620 v4)

SPECfp®_rate2006 = 600

SPECfp_rate_base2006 = 589

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Nov-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

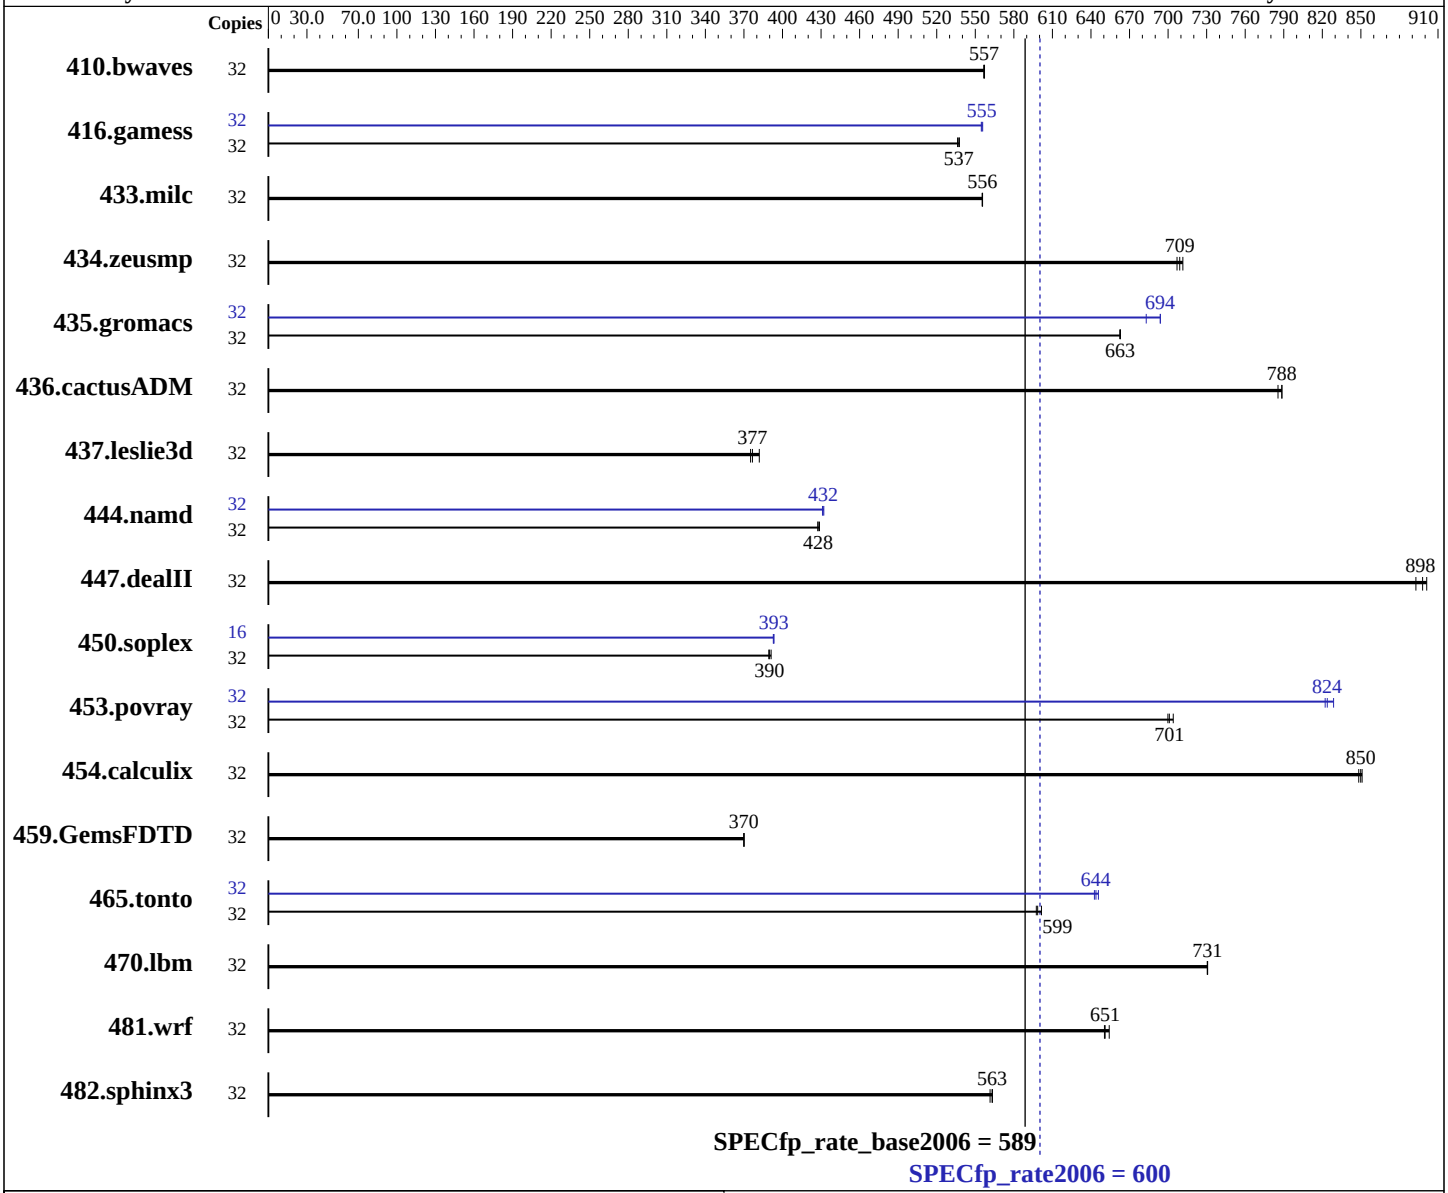

Hardware

CPU Name:	Intel Xeon E5-2620 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei CH226 V3(Intel Xeon E5-2620 v4)

SPECfp_rate2006 = 600

SPECfp_rate_base2006 = 589

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Nov-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	**781**	**557**	781	557	781	557	32	**781**	**557**	781	557	781	557
416.gamess	32	1169	536	1165	538	**1166**	**537**	32	1130	555	1127	556	**1129**	**555**
433.milc	32	529	556	**529**	**556**	529	555	32	529	556	**529**	**556**	529	555
434.zeusmp	32	**411**	**709**	412	707	409	711	32	**411**	**709**	412	707	409	711
435.gromacs	32	345	663	**345**	**663**	345	662	32	329	694	335	683	**329**	**694**
436.cactusADM	32	485	789	487	786	**485**	**788**	32	485	789	487	786	**485**	**788**
437.leslie3d	32	802	375	788	382	**799**	**377**	32	802	375	788	382	**799**	**377**
444.namd	32	599	429	600	427	**600**	**428**	32	**595**	**432**	594	432	595	431
447.dealII	32	406	901	**408**	**898**	410	893	32	406	901	**408**	**898**	410	893
450.soplex	32	**684**	**390**	682	391	686	389	16	**339**	**393**	339	393	340	393
453.povray	32	242	704	243	700	**243**	**701**	32	205	829	**207**	**824**	207	822
454.calculix	32	310	851	**311**	**850**	311	848	32	310	851	**311**	**850**	311	848
459.GemsFDTD	32	918	370	917	370	**918**	**370**	32	918	370	917	370	**918**	**370**
465.tonto	32	527	597	**526**	**599**	524	601	32	490	643	**489**	**644**	488	646
470.lbm	32	602	731	602	730	**602**	**731**	32	602	731	602	730	**602**	**731**
481.wrf	32	**549**	**651**	549	650	546	654	32	**549**	**651**	549	650	546	654
482.sphinx3	32	**1108**	**563**	1111	562	1107	563	32	**1108**	**563**	1111	562	1107	563

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Set Snoop Mode to ES mode
```

Continued on next page

Platform Notes (Continued)

```
Set Patrol Scrub to Disable
Sysinfo program /spec16/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Thu Nov 24 18:11:56 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       527792616 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
   EDT 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 23 12:44

SPEC is set to: /spec16
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      xfs   254G   32G  223G  13% /
Additional information from dmidecode:
```

Continued on next page

Platform Notes (Continued)

```
      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS Insyde Corp. 3.32 09/14/2016
     Memory:
      16x Micron 36ASF4G72PZ-2G3A1 32 GB 2 rank 2400 MHz, configured at 2133 MHz
      8x NO DIMM NO DIMM

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/spec16/libs/32:/spec16/libs/64:/spec16/sh"

  Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
  memory using RedHat EL 7.1
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
  The Huawei CH225 V3 and Huawei CH226 V3 are electronically equivalent.
  The results have been measured on a Huawei CH226 V3 model.
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei CH226 V3(Intel Xeon E5-2620 v4)

SPECfp_rate2006 = 600

SPECfp_rate_base2006 = 589

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Nov-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Dec 15 11:17:03 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 December 2016.