SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R930 (Intel Xeon E7-8880 v4, 2.20 GHz)

SPECint®_rate2006 = 3430

SPECint_rate_base2006 = 3310

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2016
Hardware Availability: Oct-2016
Software Availability: Sep-2016

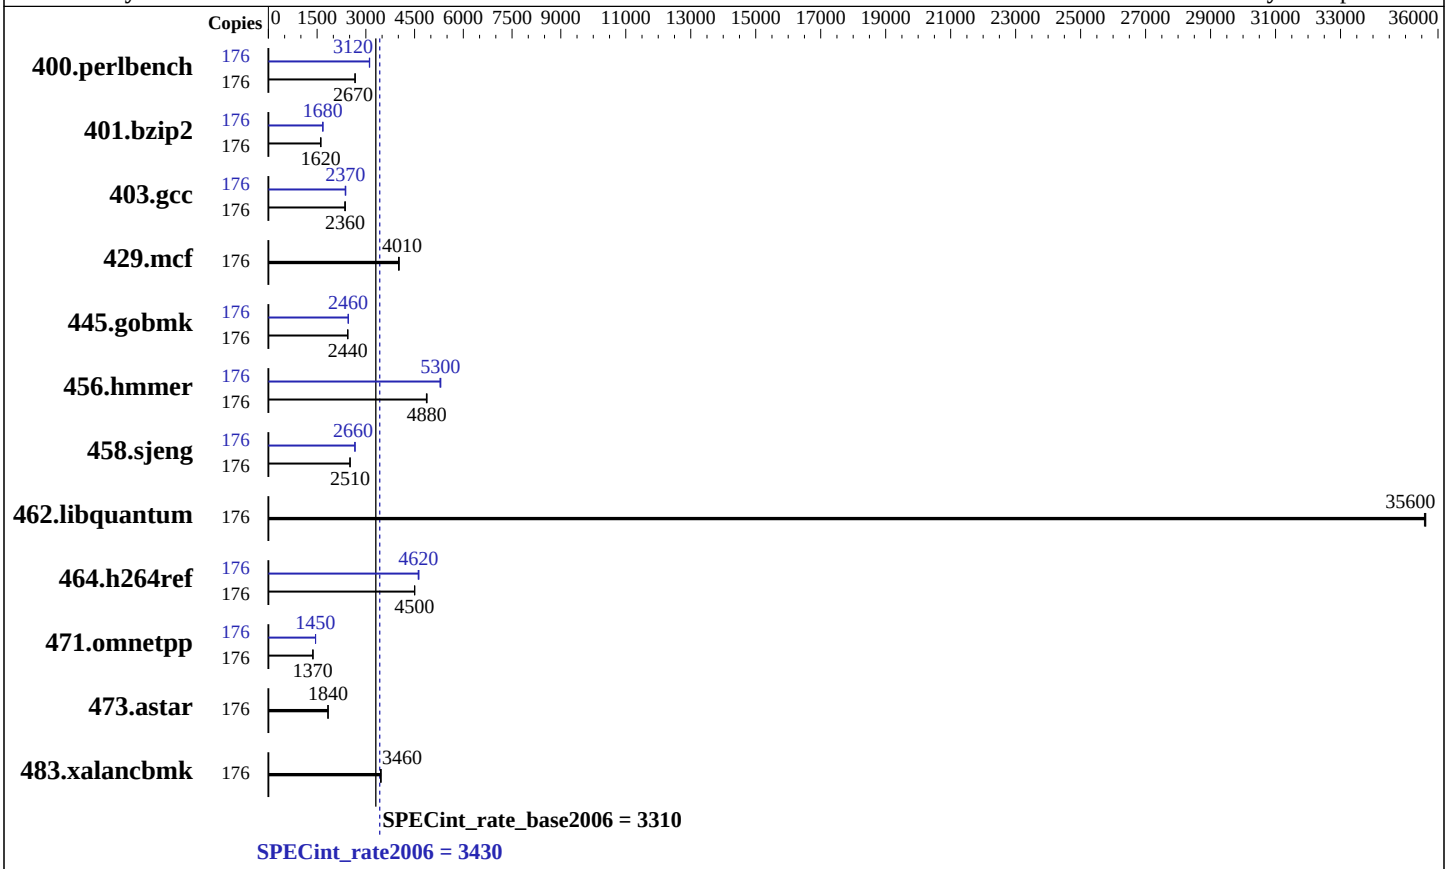

Hardware

CPU Name:	Intel Xeon E7-8880 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	88 cores, 4 chips, 22 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	55 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (32 x 16 GB 2Rx4 PC4-2133T-R, running at 1600 MHz)
Disk Subsystem:	1 x 480 GB SATA SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R930 (Intel Xeon E7-8880 v4, 2.20 GHz)

SPECint_rate2006 = 3430

SPECint_rate_base2006 = 3310

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2016
Hardware Availability: Oct-2016
Software Availability: Sep-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	176	**644**	**2670**	644	2670	645	2670	176	553	3110	**552**	**3120**	552	3120
401.bzip2	176	1050	1620	**1051**	**1620**	1059	1600	176	1013	1680	**1013**	**1680**	1014	1670
403.gcc	176	**599**	**2360**	598	2370	602	2350	176	595	2380	**598**	**2370**	599	2370
429.mcf	176	398	4030	**400**	**4010**	401	4010	176	398	4030	**400**	**4010**	401	4010
445.gobmk	176	**756**	**2440**	755	2440	756	2440	176	751	2460	750	2460	**751**	**2460**
456.hmmer	176	338	4860	**337**	**4880**	336	4880	176	311	5280	**310**	**5300**	310	5310
458.sjeng	176	**847**	**2510**	848	2510	847	2510	176	**799**	**2660**	799	2660	799	2660
462.libquantum	176	**102**	**35600**	102	35600	102	35600	176	**102**	**35600**	102	35600	102	35600
464.h264ref	176	**865**	**4500**	864	4510	866	4500	176	841	4630	**842**	**4620**	845	4610
471.omnetpp	176	802	1370	**803**	**1370**	803	1370	176	757	1450	759	1450	**757**	**1450**
473.astar	176	672	1840	**673**	**1840**	674	1830	176	672	1840	**673**	**1840**	674	1830
483.xalancbmk	176	**351**	**3460**	352	3450	350	3470	176	**351**	**3460**	352	3450	350	3470

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Snoop Mode set to Cluster on Die
Virtualization Technology disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to disabled
C1E disabled
Energy Efficient Turbo enabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Balanced Performance
Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-lbo5 Sun Nov 20 00:09:06 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E7-8880 v4 @ 2.20GHz
          4 "physical id"s (chips)
          176 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 22
          siblings  : 44
          physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
          28
          physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
          28
          physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
          28
          physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
          28
       cache size : 28160 KB

    From /proc/meminfo
       MemTotal:       529059184 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    /usr/bin/lsb_release -d
       SUSE Linux Enterprise Server 12 SP1

    From /etc/*release* /etc/*version*
       SuSE-release:
          SUSE Linux Enterprise Server 12 (x86_64)
          VERSION = 12
          PATCHLEVEL = 1
          # This file is deprecated and will be removed in a future service pack or
          release.
          # Please check /etc/os-release for details about this release.
       os-release:
          NAME="SLES"
          VERSION="12-SP1"
          VERSION_ID="12.1"
          PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
          ID="sles"
          ANSI_COLOR="0;32"
          CPE_NAME="cpe:/o:suse:sles:12:sp1"

    uname -a:
       Linux linux-lbo5 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
       (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Nov 18 22:15
```

Continued on next page

Platform Notes (Continued)

```
SPEC is set to: /root/cpu2006-1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      xfs   439G   29G  411G   7% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS Dell Inc. 2.2.0 09/29/2016
  Memory:
   32x 00AD00B300AD HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1600
   MHz
   64x Not Specified Not Specified

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`

Continued on next page

Base Portability Flags (Continued)

456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto-ilp32
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-ra-region-strategy=block` `-qopt-mem-layout-trans=3` `-Wl,-z,muldefs` `-L/sh10.2 -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Dec 15 11:18:42 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 December 2016.