SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

Sugon I980-G20 (Intel Xeon E7-8890 v4)

SPECfp®2006 = 117

SPECfp_base2006 = 108

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Dec-2016
Hardware Availability: Jun-2016
Software Availability: Sep-2016

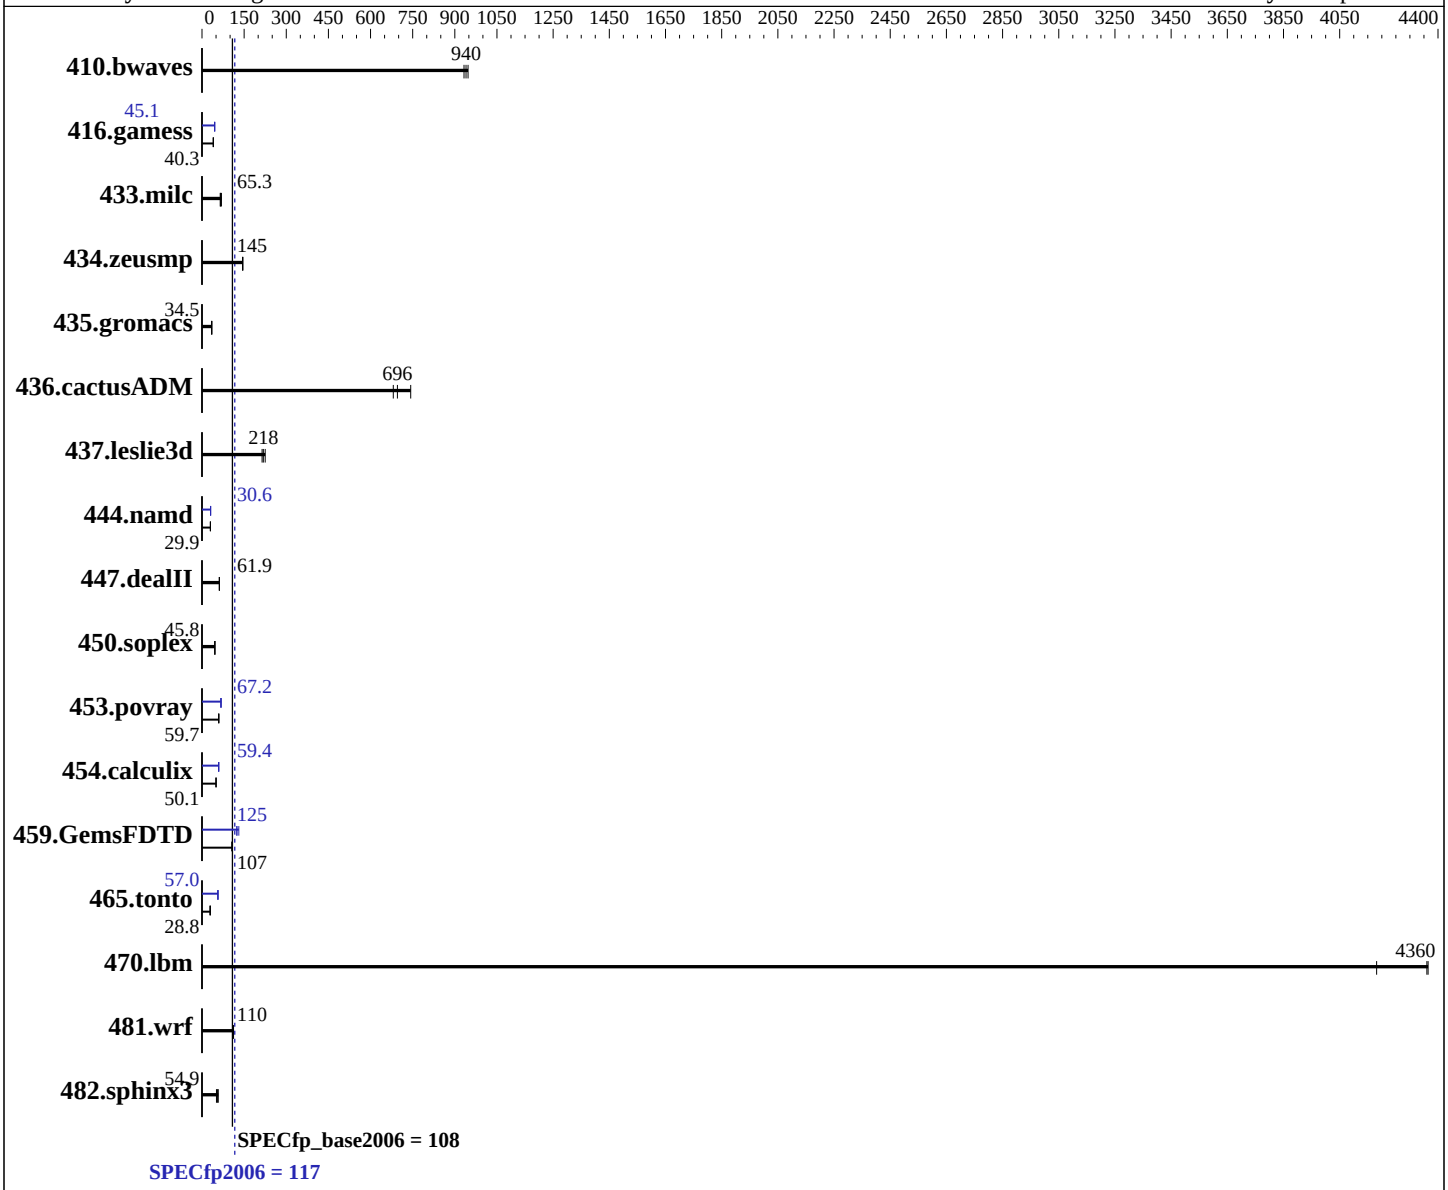

Hardware

CPU Name:	Intel Xeon E7-8890 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	192 cores, 8 chips, 24 cores/chip, 2 threads/core
CPU(s) orderable:	2,4,8 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

Sugon I980-G20 (Intel Xeon E7-8890 v4)

SPECfp2006 = 117

SPECfp_base2006 = 108

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Dec-2016
Hardware Availability: Jun-2016
Software Availability: Sep-2016

L3 Cache: 60 MB I+D on chip per chip
Other Cache: None
Memory: 2 TB (128 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 1x2.0 TB SAS 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	14.3	947	**14.5**	**940**	14.6	933	14.3	947	**14.5**	**940**	14.6	933
416.gamess	487	40.2	484	40.5	**486**	**40.3**	**434**	**45.1**	434	45.1	434	45.1
433.milc	133	69.2	**140**	**65.3**	141	65.3	133	69.2	**140**	**65.3**	141	65.3
434.zeusmp	62.5	146	**62.8**	**145**	63.1	144	62.5	146	**62.8**	**145**	63.1	144
435.gromacs	207	34.4	204	34.9	**207**	**34.5**	207	34.4	204	34.9	**207**	**34.5**
436.cactusADM	17.5	681	**17.2**	**696**	16.1	743	17.5	681	**17.2**	**696**	16.1	743
437.leslie3d	41.8	225	**43.0**	**218**	43.9	214	41.8	225	**43.0**	**218**	43.9	214
444.namd	**268**	**29.9**	268	29.9	268	30.0	262	30.6	**262**	**30.6**	262	30.6
447.dealII	**185**	**61.9**	186	61.6	184	62.0	**185**	**61.9**	186	61.6	184	62.0
450.soplex	**182**	**45.8**	183	45.7	182	45.8	**182**	**45.8**	183	45.7	182	45.8
453.povray	89.3	59.5	89.0	59.8	**89.1**	**59.7**	79.3	67.1	77.8	68.4	**79.1**	**67.2**
454.calculix	**165**	**50.1**	166	49.8	165	50.1	138	59.6	**139**	**59.4**	139	59.4
459.GemsFDTD	**99.2**	**107**	99.9	106	97.8	108	80.9	131	**85.1**	**125**	85.7	124
465.tonto	345	28.5	326	30.2	**342**	**28.8**	**173**	**57.0**	173	57.0	175	56.2
470.lbm	3.29	4180	**3.15**	**4360**	3.15	4360	3.29	4180	**3.15**	**4360**	3.15	4360
481.wrf	**101**	**110**	101	110	99.4	112	**101**	**110**	101	110	99.4	112
482.sphinx3	337	57.9	378	51.5	**355**	**54.9**	337	57.9	378	51.5	**355**	**54.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /benchmarks/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-2u6u Sat Dec 10 12:32:57 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
```

Continued on next page

Platform Notes (Continued)

```
      model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz
         8 "physical id"s (chips)
         384 "processors"
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 24
         siblings  : 48
         physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
         27 28 29
         physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
         27 28 29
         physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
         27 28 29
         physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
         27 28 29
         physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
         27 28 29
         physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
         27 28 29
         physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
         27 28 29
         physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
         27 28 29
      cache size : 61440 KB

   From /proc/meminfo
      MemTotal:       2117870400 kB
      HugePages_Total:   135168
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      SUSE Linux Enterprise Server 12 SP1

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 12 (x86_64)
         VERSION = 12
         PATCHLEVEL = 1
         # This file is deprecated and will be removed in a future service pack or
         release.
         # Please check /etc/os-release for details about this release.
      os-release:
         NAME="SLES"
         VERSION="12-SP1"
         VERSION_ID="12.1"
         PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
         ID="sles"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:12:sp1"

   uname -a:
```

Continued on next page

Platform Notes (Continued)

```
     Linux linux-2u6u 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
     (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Dec 9 06:02 last=5

  SPEC is set to: /benchmarks/cpu2006
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sdb1      ext4  1.8T  672G  1.1T  39% /benchmarks/cpu2006
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. 2.60 10/12/2016
    Memory:
     128x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1600 MHz
     64x NO DIMM NO DIMM

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/benchmarks/cpu2006/libs/32:/benchmarks/cpu2006/libs/64:/benchmarks/cpu2006/sh10.2"
OMP_NUM_THREADS = "192"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default.
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3 -auto -unroll4

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-BDW-revD.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-BDW-revD.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 28 10:51:51 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 December 2016.