# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

## Huawei RH5885H V3 (Intel Xeon E7-8880 v4)

SPECint®_rate2006 = 3460

SPECint_rate_base2006 = 3320

**CPU2006 license:** 3175
**Test sponsor:** Huawei
**Tested by:** Huawei

**Test date:** Dec-2016
**Hardware Availability:** Jun-2016
**Software Availability:** Dec-2015

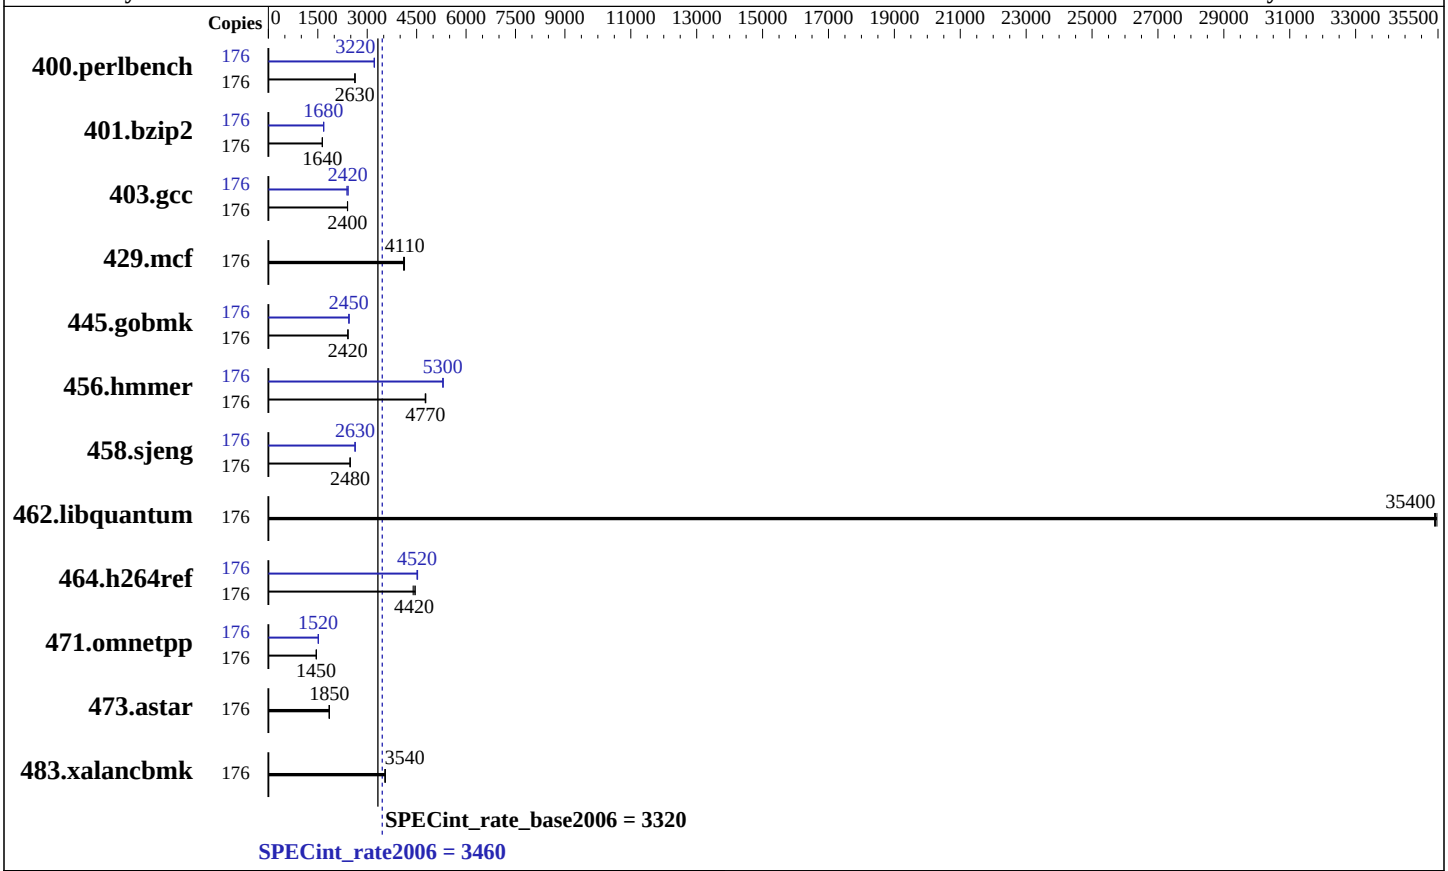


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E7-8880 v4 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.30 GHz |
| CPU MHz: | 2200 |
| FPU: | Integrated |
| CPU(s) enabled: | 88 cores, 4 chips, 22 cores/chip, 2 threads/core |
| CPU(s) orderable: | 2,4 chips |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 55 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 512 GB (32 x 16 GB 2Rx8 PC4-2400T-R, running at 1600 MHz) |
| Disk Subsystem: | 2 x 600 GB SAS, 10K RPM |
| Other Hardware: | None |

### Software

| | |
|---|---|
| Operating System: | SUSE Linux Enterprise Server 12 (x86_64) SP1 Kernel 3.12.49-11-default |
| Compiler: | C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux |
| Auto Parallel: | No |
| File System: | xfs |
| System State: | Run level 5 (multi-user) |
| Base Pointers: | 32-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.2 |

# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

Huawei RH5885H V3 (Intel Xeon E7-8880 v4)

SPECint_rate2006 = 3460

SPECint_rate_base2006 = 3320

**CPU2006 license:** 3175
**Test sponsor:** Huawei
**Tested by:** Huawei

**Test date:** Dec-2016
**Hardware Availability:** Jun-2016
**Software Availability:** Dec-2015

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 176 | **655** | **2630** | 653 | 2630 | 655 | 2620 | 176 | 536 | 3210 | 534 | 3220 | **535** | **3220** |
| 401.bzip2 | 176 | 1036 | 1640 | **1036** | **1640** | 1038 | 1640 | 176 | 1013 | 1680 | 1012 | 1680 | **1012** | **1680** |
| 403.gcc | 176 | 589 | 2410 | **590** | **2400** | 590 | 2400 | 176 | 595 | 2380 | **587** | **2420** | 586 | 2420 |
| 429.mcf | 176 | 388 | 4130 | **390** | **4110** | 391 | 4110 | 176 | 388 | 4130 | **390** | **4110** | 391 | 4110 |
| 445.gobmk | 176 | **764** | **2420** | 764 | 2420 | 765 | 2410 | 176 | 756 | 2440 | 754 | 2450 | **755** | **2450** |
| 456.hmmer | 176 | 345 | 4760 | 344 | 4780 | **344** | **4770** | 176 | **310** | **5300** | 309 | 5310 | 310 | 5290 |
| 458.sjeng | 176 | 858 | 2480 | **858** | **2480** | 858 | 2480 | 176 | 808 | 2630 | 810 | 2630 | **809** | **2630** |
| 462.libquantum | 176 | 103 | 35500 | 103 | 35400 | **103** | **35400** | 176 | 103 | 35500 | 103 | 35400 | **103** | **35400** |
| 464.h264ref | 176 | 873 | 4460 | 887 | 4390 | **880** | **4420** | 176 | 863 | 4520 | **862** | **4520** | 860 | 4530 |
| 471.omnetpp | 176 | 757 | 1450 | 755 | 1460 | **756** | **1450** | 176 | 725 | 1520 | **726** | **1520** | 726 | 1510 |
| 473.astar | 176 | 671 | 1840 | **667** | **1850** | 667 | 1850 | 176 | 671 | 1840 | **667** | **1850** | 667 | 1850 |
| 483.xalancbmk | 176 | **343** | **3540** | 342 | 3550 | 343 | 3540 | 176 | **343** | **3540** | 342 | 3550 | 343 | 3540 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Turbo mode set with:
 cpupower -c all frequency-set -g performance
```

## Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Set Lock_step to disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Set C-State to C0/C1
Sysinfo program /home/spec/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on RH5885Hv3 Tue Dec 13 02:43:29 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8880 v4 @ 2.20GHz
```

Continued on next page

## Platform Notes (Continued)

```
        4 "physical id"s (chips)
        176 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 22
        siblings  : 44
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
        physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
        physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
     cache size : 28160 KB

  From /proc/meminfo
     MemTotal:       529088608 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP1

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 1
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP1"
        VERSION_ID="12.1"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp1"

  uname -a:
     Linux RH5885Hv3 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
     (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

  run-level 5 Dec 12 22:47

  SPEC is set to: /home/spec
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda1      xfs   750G  8.0G  742G   2% /home
  Additional information from dmidecode:
```

Continued on next page

## Platform Notes (Continued)

```
      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. BLISY102 11/07/2016
    Memory:
     64x NO DIMM NO DIMM
     32x Samsung M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz, configured at 1600 MHz

  (End of data from sysinfo program)
```

## General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/spec/libs/32:/home/spec/libs/64:/home/spec/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

# Base Compiler Invocation

C benchmarks:
```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:
```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

# Base Portability Flags

```
    400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
      401.bzip2: -D_FILE_OFFSET_BITS=64
        403.gcc: -D_FILE_OFFSET_BITS=64
        429.mcf: -D_FILE_OFFSET_BITS=64
      445.gobmk: -D_FILE_OFFSET_BITS=64
      456.hmmer: -D_FILE_OFFSET_BITS=64
      458.sjeng: -D_FILE_OFFSET_BITS=64
  462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
    464.h264ref: -D_FILE_OFFSET_BITS=64
```

Continued on next page

## Base Portability Flags (Continued)

471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

## Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`

Continued on next page

## Peak Portability Flags (Continued)

429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

Continued on next page

## Peak Optimization Flags (Continued)

471.omnetpp: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-ansi-alias` `-opt-ra-region-strategy=block -Wl,-z,muldefs` `-L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

## Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.xml`


SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jan 11 10:34:49 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 January 2017.