SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer SD350
(2.40 GHz, Intel Xeon E5-2640 v4)

SPECint®2006 = 68.7

SPECint_base2006 = 65.0

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Jan-2017
Hardware Availability: Sep-2016
Software Availability: Sep-2016

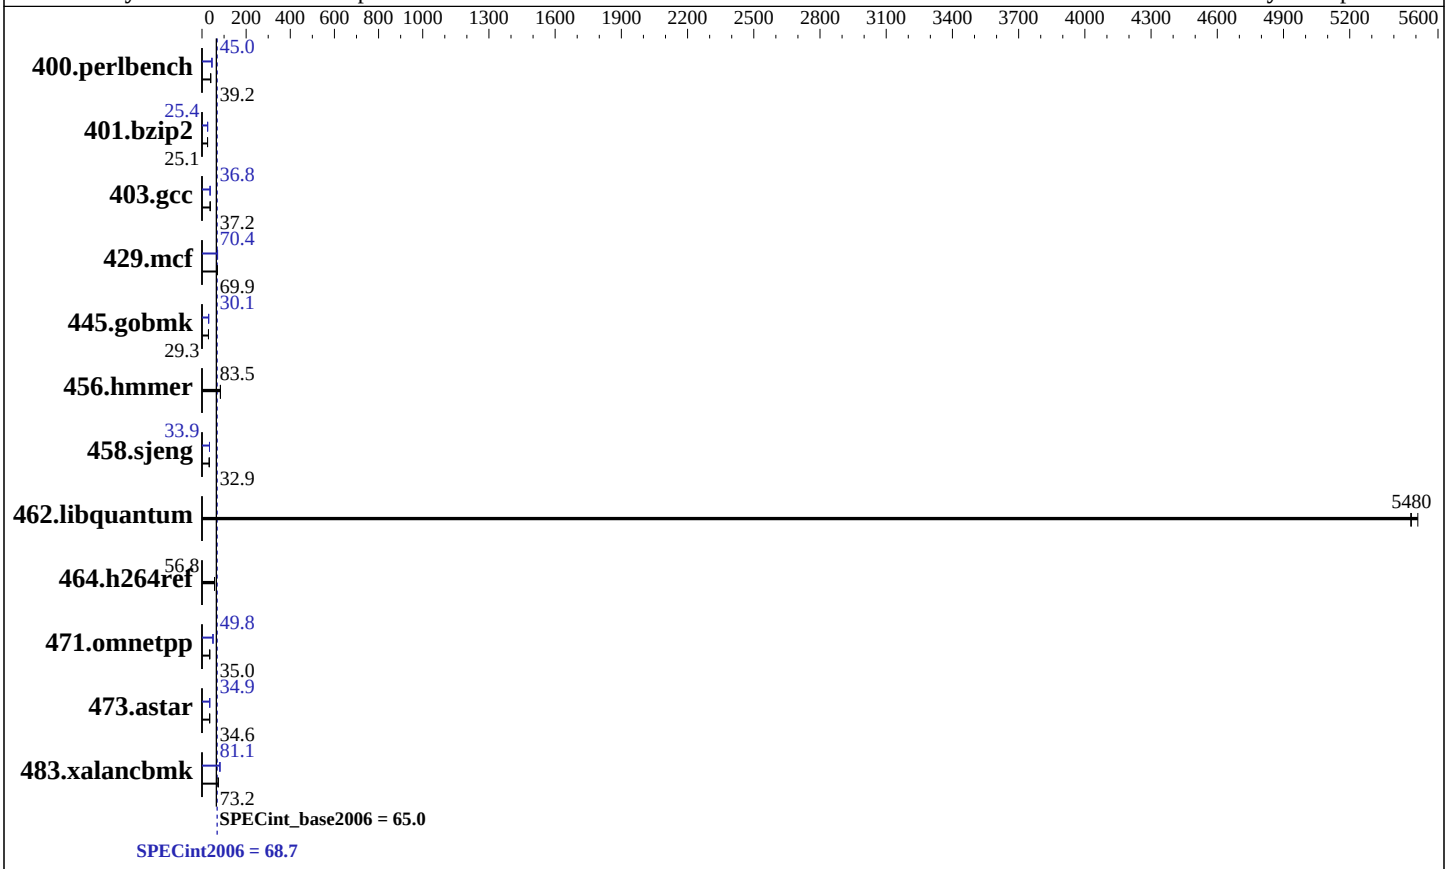

Hardware

CPU Name:	Intel Xeon E5-2640 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) Kernel 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	Yes
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer SD350
(2.40 GHz, Intel Xeon E5-2640 v4)

SPECint2006 = 68.7

SPECint_base2006 = 65.0

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Jan-2017
Hardware Availability: Sep-2016
Software Availability: Sep-2016

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	249	39.2	**249**	**39.2**	248	39.4	**217**	**45.0**	217	44.9	217	45.0
401.bzip2	383	25.2	**384**	**25.1**	385	25.1	379	25.4	380	25.4	**379**	**25.4**
403.gcc	**216**	**37.2**	216	37.2	216	37.2	**219**	**36.8**	219	36.8	219	36.7
429.mcf	**130**	**69.9**	130	70.0	131	69.6	129	70.5	**129**	**70.4**	132	69.1
445.gobmk	357	29.4	358	29.3	**358**	**29.3**	349	30.1	**349**	**30.1**	349	30.1
456.hmmer	112	83.5	**112**	**83.5**	112	83.5	112	83.5	**112**	**83.5**	112	83.5
458.sjeng	368	32.9	**367**	**32.9**	367	33.0	356	33.9	**357**	**33.9**	357	33.9
462.libquantum	**3.78**	**5480**	3.78	5480	3.76	5510	**3.78**	**5480**	3.78	5480	3.76	5510
464.h264ref	**390**	**56.8**	390	56.7	389	56.8	**390**	**56.8**	390	56.7	389	56.8
471.omnetpp	177	35.4	**178**	**35.0**	184	34.0	126	49.7	126	49.8	**126**	**49.8**
473.astar	204	34.5	202	34.7	**203**	**34.6**	201	34.8	201	35.0	**201**	**34.9**
483.xalancbmk	93.6	73.7	**94.3**	**73.2**	94.4	73.1	84.9	81.3	**85.0**	**81.1**	85.3	80.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS configuration:
Hyper-Threading set to Disabled
 Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on Kent-SUT1 Thu Jan 14 13:49:29 2016

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2640 v4 @ 2.40GHz
       2 "physical id"s (chips)
       20 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
```

Continued on next page

Platform Notes (Continued)

```
        cpu cores : 10
        siblings  : 10
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
     cache size : 25600 KB

  From /proc/meminfo
     MemTotal:       264571652 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 1
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP1"
        VERSION_ID="12.1"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp1"

  uname -a:
     Linux Kent-SUT1 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
     (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jan 14 13:49

  SPEC is set to: /home/cpu2006-1.2-ic17.0
     Filesystem     Type   Size  Used Avail Use% Mounted on
     /dev/md126p2   btrfs  745G  6.6G  738G   1% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. 3.57 08/12/2016
    Memory:
     16x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz, configured at 2133 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"
OMP_NUM_THREADS = "20"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

C++ benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2)
`-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div`(pass 2) `-qopt-prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2)
`-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div -auto-ilp32 -qopt-prefetch`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)

456.hmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.xml

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer SD350
(2.40 GHz, Intel Xeon E5-2640 v4)

SPECint2006 = 68.7

SPECint_base2006 = 65.0

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Jan-2017
Hardware Availability: Sep-2016
Software Availability: Sep-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 7 17:00:13 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 February 2017.